



2023/4

PRODUCT CATALOGUE



INDUSTRIAL POWER TOOLS

INDEX

2		DHP453ZK	17	DUC302Z	9/58	HR2630	52
2012NB	49	DHP482RFE	17	DUC400Z	9/58	HR2631F	52
4		DHP482ZJ	17	DUH523Z	29/61	HR2810	52
4107R	37	DHP484ZJ	17	DUH602Z	29/61	HR3200C	52
4114S	37	DHP458ZK	18	DUH651Z	10/61	HR4002	52
4131	37	DHP485ZJ	17	DUN461WZ	30/62	HR4003C	53
4329K	46	DHP486ZJ	18	DUN500W	30/62	HR4013C	53
4350FCT	46	DHP487ZJ	18	DUP362Z	11/59	HR5212C	53
5		DHR202ZK	23	DUR190LZX3	29/60	HS0600	36
5143R	37	DHR242ZJ	23	DUR192L	29/60	HS7601K	36
5903RK	42	DHR263ZK	8	DUR193Z	29/60	J	
6		DHR280ZWJ	8	DUR368AZ	10/60	JN1601	47
6411	41	DHR400ZK	8	DUR368LZ	10/60	JN3201J	48
6906	46	DHS680ZJ	15	DUS158Z	30/59	JR3061T	47
9		DHS710Z	7	DUT131Z	26	JR3070CT	47
9031	35	DJN161Z	24	DVC350Z	4	JS1601	48
9032	34	DJR183Z	22/28/59	DVC660Z	4	JS1602	48
9046	50	DJR360ZK	8	DVC865LZX3	4	JS3201J	48
9237CB	50	DJR186ZK	22	DVC750L	4	JV0600K	46
9401	35	DJR187ZK	22	DVR450Z	15	K	
9403	35	DJS101ZJ	24	DVP180Z	25	KP0800K	48
9557HNG	32	DJS161ZJ	24	DWR180Z	19	KP0810K	48
9558HP	32	DJV180ZK	20	DWT310K	7	L	
A		DJV181ZJ	21	E		LC1230N	38
AF506	36	DJV182ZK	21	EA3502S	58	LD050P	47
AF601	36	DKP180Z	21	F		LD080PI	47
ADPO5	26	DKP181Z	21	FS2300	55	LS0815FLN	43
B		DLM382DZ	10/61	FS2500	55	LS1018LN	43
BL1016	33	DLM432Z	10/61	FS2700	55	LS1019L	43
BL1041B	33	DLM461Z	11/61	FS4300	55	LS1040N	43
BL1815N	6/13	DLS212Z	8	FS6300	55	LS1219L	43
BL1830B	6/13	DLW140Z	7	G		LW1401	44
BL1850B	6/13	DML801	27	GA4530	32	M	
BL1860B	6/13	DML802	27	GA4534	32	MLT100N	42
BO3710	49	DML807	27	GA4540	32	N	
BO4555	49	DML815	26	GA4550	32	N5900B	36
BO4900	49	DMP180Z	26	GA5010	33	P	
BO5031	50	DP2010N	41	GA5040	33	PC5001C	38
BO5041	50	DP4002	42	GA5040C	33	PDC01	11/62
BO6030	50	DPB180ZK	14	GA7010C	33	PDC1200A01	11/62
BO6050J	50	DPJ180ZJ	21	GA7020	33	PJ7000	35
C		DPT353Z	25	GA9010C	33	R	
CC301DZJ	33	DRS780Z	7	GA9020	34	RP0900	53
CP100Z	33	DRT50ZJ	25	GA9020K	34	RP1800X	53
D		DRT50ZJX2	25	GA9040SK01	34	RP2301FCX	53
DA3010F	42	DRV250ZJ	25	GA9050	34	RT0700C	54
DBO180Z	23	DS4012	42	GA9060	34	RT0700CX2J	54
DBS180Z	23	DSC163ZK	22	GD0600	40	S	
DC10SB	33	DSC121ZK	22	GD0603	40	SG1251J	37
DC18RC	13	DSD180ZJ	15	GD0800C	40	SP6000J	37
DC18RD	13	DSP600ZJ	7	GD0801C	41	T	
DC18SE	13	DSS610ZJ	15	GD0810C	41	TD0101F	45
DCF102Z	26	DST221Z	25	GD0811C	41	TM3000CX2	49
DCG180ZK	14	DTD152Z	18	GS5000	41	TW0200	45
DCL180Z	4	DTD153ZJ	18	H		TW0350	45
DCL184Z	4	DTD154Z	18	HG6031VK	42	TW1000	46
DCM501ZR	27	DTD172ZJ	19	HM0870C	38	U	
DCO180Z	15	DTL061ZJ	19	HM1203C	38	UB1102	35
DCS553ZJ	15	DTL063ZJ	19	HM1307C	40	UB1103	35
DDA350ZK	16	DTM50ZK	21	HM1501	38	UH6570	62
DDF484ZJ	16	DTR180ZJ	22	HM1802	40	VC2512L	49
DDF486ZJ	16	DTS141ZJ	19	HM1812	39/40		
DDF487ZJ	16	DTW190ZK	19	HP0300	44		
DDG460ZX1	11/59	DTW251ZK	20	HP1230	44		
DFR550ZJ	24	DTW300ZJ	20	HP1630	44		
DFS250ZJ	23	DTW700ZJ	20	HP1640	44		
DFS251ZJ	23	DTW1001ZJ	20	HP2010N	45		
DFS452ZJ	24	DTW1002ZJ	20	HP2050	44		
DGA452ZK	14	DUA301Z	9/59	HP2051	44		
DGA456ZJ	14	DUB184Z	28/57	HP2070	45		
DGA458ZJ	14	DUB185Z	28/57	HR2230	51		
DGA463ZJ	14	DUB186Z	28/57	HR2300	51		
DGA900ZK	7	DUB361Z	9/57	HR2460	51		
DGD800Z	16	DUB362Z	9/57	HR2470	51		
DGD801ZK	16	DUC122Z	28/58	HR2470T	51		
DGP180Z	24	DUC254Z	28/30/58	HR2475	51		
DHP453RYE	17	DUC256Z	9/58	HR2600	52		

Vacuum
Cleaners

3



Cordless
Tools
18V+18V
(36V)

5



Cordless
OPE Tools
18V+18V
(36V)

9



Cordless
18V Tools

12



Cordless
18V OPE
Tools

28



Corded
Tools

31



OPE
Tools

56



Cleaners



VC2512L

Vacuum Cleaner



21 L Dust Class L Vacuum Cleaner (Wet & Dry)

- Approved for Dust Class L in accordance with the EU standard
- For both wet and dry vacuum cleaning
- Best suitable for working with power tools
- Push & Clean semi-automatic filter cleaning system for extended operating time and filter life
- When working with electric drilling, sanding or cutting tools the automatic start/stop function activates the machine when a connected power tool is used

Hose, Hand tube, Crevice Nozzle, Floor Nozzle, Tool adapter, Aluminum tube, Fleece filter bag, Disposal bag

Continuous rating input	1,000W
Max peak air flow	3.6 m³ / min
Max Sealed Suction	21.0 kPa
Tank capacity	Dust : 21 L
	Water : 18 L
Sound level	72 dB(A)
Dimensions (L x W x H)	390x390x530 mm
Net weight	7.0 kg (15.5 lbs.)
Power supply cord	5 m (16.4 ft)

DCL180Z

Cordless Cleaner



18V

18V LXT Li-ion Cordless Cleaner

Capacity	650 mL
Continuous Use (min.)	w/ BL1830B: 20
Max Air Flow	1.4 m³/min
Max Sealed Suction	4.2 kPa (428 mmHO)
(water column)	
Suction Power	30 W
Dimensions (L x W x H)	999x114x152 mm
Net weight	1.2 kg

DCL184Z

Cordless Cleaner



- Higher suction power and longer continuous run time
- Optimum housing design for car interior cleaning
- Comes with a variety of special nozzles optimum for cleaning car interior
- Also accepts the nozzles for our existing cordless cleaners
- Blower nozzle complete converts to a blower for added versatility



18V LXT Li-ion Cordless 3-Speed Cleaner

Capacity	Cloth Dust Bag / Paper Dust Bag: 500 / 330 mL
Continuous Use	Max / High / Normal: 20 / 30 / 80
(w/ BL1830B) (min.)	
Max Air Flow	Cleaning: 1.4 m³/min
Max Sealed Suction	5.4 kPa (550 mmH₂O)
(water column)	
Suction Power	Max / High / Normal: 38 / 23 / 5 W
Max Air Flow	Blowing: 0.4 m³/min
Max Air Velocity	Blowing: 100 m/s
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B
	365 x 138 x 202 mm (14-3/8 x 5-7/16 x 8")
Net weight	1.8 - 2.2 kg (4.0 - 4.9 lbs.)

DVC350Z

Cordless Vacuum Cleaner



- Compact and lightweight design for high portability
- Convenient for use with Makita cordless tools
- Large 3L dust bag capacity
- Variable switch provides High/Low air volume settings to suit your application
- Shoulder belt can be easily slung over your shoulder for added mobility



18V LXT Li-ion Cordless Vacuum Cleaner

Max Air Flow	1.4 m³/min
Max Sealed Suction	6.0 kPa (612 mmHO)
(water column)	
Recoverable capacity	Dust : 3.0 L (0.8 gal)
Dimensions (L x W x H)	273x195x226 mm
Net weight	2.2 - 2.4 kg

DVC750L

Cordless Portable Vacuum Cleaner



- Compact, portable and easy-to-use
- BL motor allows 1.6 m³/min of Max air flow / 6.7 kPa of Max sealed suction / 50 W of Suction power and long run time to go together
- HEPA Filter is used to capture very small particles effectively
- Wet and dry
- 7.5L Large dust bag capacity enables continuous cleaning work



18V LXT BL Brushless Cordless 7.5 L HEPA Portable Vacuum Cleaner

Capacity	Dust / Water: 7.5 / 4.5 L
Continuous Use (min.)	w/ BL1850B (High): 35
	w/ BL1850B (Low): 70
Max Air Flow/Max	1.6 m³/min
Sealed Suction	6.7 kPa
Suction Power	High / Low: 50 / 25W
Dimensions (L x W x H)	418x251x278 mm
Net weight	4.3 - 4.6 kg (9.4 - 10.1 lbs.)

DVC660Z

Cordless Backpack Vacuum Cleaner



- Cleaning mechanism for paper dust bag
- Increased suction power for improved dust collection
- BL motor allows 2.2 m³/min of Max air flow / 11 kPa of Max sealed suction and long run time
- Delivers up to 140 min of run time using BL1860B on normal setting
- Mode memory function allows to start in the same suction power when you turned it off previously



18V X2 (36V) LXT BL Brushless Cordless Backpack Vacuum Cleaner

Capacity	Paper Dust Bag: 6.0L
	Cloth Dust Bag: 5.5L
Max Air Flow	w/Hose complete 32-1.0: 2.2m³/min
	w/Hose complete 28-1.0: 2.0m³/min
Max Sealed Suction	11kPa
Suction Power	Max / High / Normal / w/Hose 32-1.0
	95 / 50 / 25W
Suction Power	Max / High / Normal / w/Hose 28-1.0
	90 / 45 / 25W
Vibration Level	Operation w/o Load 2.5 m/s² or less
Sound Pressure Level	70 dB(A) or less
Dimensions (L x W x H)	297x174x523 mm
Net weight	6.1 - 6.7 kg

DVC865LZX3

Cordless Vacuum Cleaner



18V X2 (36V) LXT BL Cordless 8 L Dust Class L Vacuum Cleaner (Wet & Dry)

A versatile wet/dry dust extractor that runs on two 18V LXT batteries.



Capacity	Dust / Water: 8 / 6 L
Continuous Use (min.)	w/ BL1860B: 100
Max Air Flow	2.1 m³/min
Max Sealed Suction	11 kPa
Suction Power	105 W
Dimensions (L x W x H)	366 x 334 x 368 mm
	(14-3/8 x 13-1/8 x 14-1/2")
Net weight	7.0 - 7.7 kg (15.4 - 17.0 lbs.)

PRODUCTS

▣ CORDLESS TOOLS

18v + 18v → 36v



-  Variable Speed
-  Brake
-  Reversing
-  Mechanical 2-Speed
-  Mechanical 3-Speed
-  Electronic 2-Speed
-  Electronic 3-Speed
-  Electronic 4-Speed
-  Keyless Chuck
-  Torque Setting 16
-  Torque Setting 18
-  Torque Setting 20
-  Torque Setting 21
-  SDS-PLUS Shank
-  SDS-MAX Shank
-  Torque Limiter
-  Constant Speed
-  Soft Start
-  Bevel Cutting 45 left
-  Bevel Cutting 45 LR
-  Bevel Cutting L45 R5
-  Orbital Cutting
-  Bayonet Shank Jig Saw Blade
-  Laser Marker
-  Hook & Loop
-  Depth Adjustment
-  Sequential and Bump-fire
-  Auto Firing Stop
-  Anti Vibration
-  Automatic Oiling
-  Chain Brake
-  Revolving Hose
-  Static Free Hose
-  Dust Collection
-  Built-in Job Light
-  Carrying Case

18Vx2 Lithium-ion

Powered by two 18V Li-ion batteries in series

The compatible batteries are:

with Battery fuel gauge

1.5Ah
BL1815N*



15min
Charge time

3.0Ah
BL1830B



22min
Charge time

5.0Ah
BL1850B



45min
Charge time

6.0Ah
BL1860B



55min
Charge time

*without Battery fuel gauge

***SEE THE RANGE OF 18V + 18V MACHINES IN THE CATALOGUE MARKED WITH**

When different capacity batteries are used together (for example, 1.5Ah BL1815N and 3.0Ah BL1830B, or fully charged BL1830B and 70% charged BL1830B), the machine stops when a battery is completely discharged.



Two 18V Li-ion batteries can be directly installed on the machine to supply energy to the powerful 36V DC motor drive system.



DGA900ZK

Cordless Angle Grinder



18V X2 (36V) LXT BL Cordless 230 mm (9") Angle Grinder, Soft Start, Electric Brake

- Two 18V LXT Li-Ion batteries deliver the power and performance for corded demands without leaving the 18V LXT platform
- ADT (Automatic torque Drive Technology) adjusts speed and torque during operation for optimum performance
- AFT (Active Feedback sensing Technology) turns the motor off if rotation speed suddenly slows or wheel is forced to stop



Wheel Diameter	230 mm (9")
Hole Diameter	22.23 mm (7/8")
No Load Speed (RPM)	6,000
Vibration Level	Surface Grinding w/ Anti-Vibration Side Grip: 7.5 m/s ² Disc Sanding w/ Anti-Vibration Side Grip: 2.5 m/s ² or less
Sound Pressure Level	88 dB(A)
Sound Power Level	99 dB(A)
Dimensions (L x W x H)	499x250x158 mm (19-5/8"x9-7/8"x6-1/4")
Net weight	5.2 - 8 kg (11.46 - 17.64 lbs.)

DLW140Z

Cordless Abrasive Cut-Off Saw



18V X2 (36V) LXT BL 355 mm (14") Cordless Abrasive Cut-Off Saw

- World's First Cordless Portable Cut-off
- Cuts 130 metal studs with BL1850B x2
- Electric brake allows adjustments to be completed faster for maximum productivity
- Load status indicator shows the load level on the motor during cutting operation
- Suitable for light duty application, such as cutting metal studs



Wheel Diameter	355 mm (14")
Hole Diameter	25.4 mm (1")
No Load Speed (RPM)	3,800
Capacity at 90°	Round: 127 mm (5") Rectangular: 115x130 mm (4-1/2"x5-1/8") Rectangular: 102x194 mm (4"x7-5/8")
Capacity at 45°	Rectangular: 70x233 mm (2-3/4"x9-1/8") Round: 127 mm (5") Rectangular: 115x103 mm (4-1/2"x4-1/16")
Vibration Level	2.5 m/s ²
Sound Pressure Level	103 dB(A)
Sound Power Level	115 dB(A)
Dimensions (L x W x H)	537x290x640 mm
Net weight	17.2 - 17.8 kg (37.9 - 39.3 lbs.)

*Standard with Blade Part no. B-64696

DWT310K

Cordless Shear Wrench



18V X2 (36V) LXT BL Brushless Cordless M16 (5/8") / M20 (3/4") / M22 (7/8") 804 N-m (593 ft.lbs.) Shear Wrench

- Up to 14% Faster Fastening than Corded Model 6922NB
- Fastens 380 M22 (7/8") torque shear bolts with two 18V 6.0 Ah batteries
- 18V solution for corded power demands
- Two 18V LXT Li-Ion batteries deliver the power and run time for corded demands without leaving the 18V LXT platform
- High power delivered by 36V (18Vx2) DC Brushless motor enables to fasten as fast as if you were using a corded shear wrench



Capacity	High Strength Torque Shear Bolt (HTB) M16, M20, M22 (5/8, 3/4, 7/8") Super High Strength Torque Shear Bolt (SHTB) M16, M20 (5/8, 3/4")
No Load Speed (RPM)	14
Max Fastening Torque	804 N-m (593 ft.lbs.)
Vibration Level	2.5 m/s ² or less
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	296 x 130 x 377 mm (11-5/8 x 5-1/8 x 14-7/8")
Net weight	6.5 - 7.1 kg (14.3 - 15.7 lbs.)

DHS710Z

Cordless Circular Saw



18V X2 (36V) LXT Li-Ion Cordless 190mm (7-1/2") Circular Saw, Electric Brake, Soft Start

- Two 18V LXT Li-Ion batteries deliver the power and performance for corded demands without leaving the 18V LXT platform
- Makita-built motor delivers 4,800 RPM for fast cutting and ripping
- Heavy gauge aluminium die cast wraparound base engineered for improved durability and straighter cuts (DHS710)
- Lightweight for operator comfort



Blade Diameter	190 / 185 mm (7-1/2" / 7-1/4")
Max Cutting Capacity	90°: 68.5 / 66 mm (2-11/16" / 2-5/8") 45°: 49 / 47.5 mm (1-15/16" / 1-7/8") 50°: 44 / 42.5 mm (1-3/4" / 1-11/16")
No Load Speed (RPM)	4,800
Vibration Level	Cutting Wood: 2.5 m/s ² or less
Sound Pressure Level	85 dB(A)
Sound Power Level	96 dB(A)
Dimensions (L x W x H)	356x217x298 mm (14"x8-1/2"x11-3/4")
Net weight	3.9 - 4.6 kg (8.6 - 10.1 lbs.)

DRS780Z

Cordless Rear Handle Saw



18V X2 (36V) LXT BL ADT Cordless 185 mm (7-1/4") Magnesium Rear Handle Saw, Electric Brake, Soft Start

- Cuts 3X Material in a Single Pass; Blade Left Design
- 18V solution for corded power demands
- Two 18V LXT Li-Ion batteries deliver the power and performance for corded demands without leaving the 18V LXT platform
- BL motor delivers 5,100 RPM for fast cutting and ripping
- BL motor eliminates carbon brushes, enabling the BL motor to run cooler and more efficiently for longer life



Blade Diameter	185 mm (7-1/4")
Max Cutting Capacity	90°: 65 mm (2 - 9/16") 45°: 45 mm (1-3/4") 53°: 38 mm (1-1/2")
No Load Speed (RPM)	5,100
Dimensions (L x W x H)	446x196x270 mm (17-1/2"x7-3/4"x10-5/8")
Net weight	5.0 - 5.6 kg (11.1 - 12.4 lbs.)

*Standard with Blade Part no. B-09416

DSP600ZJ

Cordless Plunge Cut Saw



18V X2 (36V) LXT BL Cordless 165 mm (6-1/2") Plunge Cut Saw

- Up to 80% faster cutting than corded model SP6000
- Automatic torque Drive Technology (ADT) adjusts cutting speed and torque during cut for optimum performance
- 18V solution for corded power demands



Blade Diameter	165 mm (6-1/2")
Bevel Capacity	-1° - 48°
Max Cutting Capacity	90°: 56 mm (2-3/16") 45°: 40 mm (1-9/16") 48°: 38 mm (1-1/2")
No Load Speed (RPM)	2,500 - 6,300
Sound Pressure Level	92 dB(A)
Sound Power Level	103 dB(A)
Vibration Level	Cutting Wood: 2.5 m/s ² or less Cutting Metal: 2.5 m/s ² or less
Dimensions (L x W x H)	346x241x272 mm (13-5/8"x9-1/2"x10-3/4")
Net weight	4.4 kg (9.8 lbs.)

*Standard with Blade Part no. B-57364

*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

* There is limited stock on some of the models. Please confirm availability.

DLS212Z

Cordless Slide Compound Mitre Saw



18V X2 (36V) LXT BL ADT Cordless 305 mm (12") Slide Compound Mitre Saw, Laser

- Rail-forward design enables to be placed against a wall for maximizing work space
- 18V solution for corded power demands
- Two 18V LXT Li-Ion batteries deliver the power and run time for corded demands without leaving the 18V LXT platform
- High power delivered by 36V (18Vx2) DC Brushless motor enables to cut as fast as if you were using a corded slide compound mitre saw



Blade Diameter	305 mm (12")
Mitre Angle	60° L / 60° R
Bevel Angle	48° L / 48° R
Max Cutting Capacity	90° Miter: 107 x 363 mm (4-1/4" x 14-1/4") 90° Miter: 92 x 382 mm (3-5/8" x 15") 45° Miter, L/R: 107 x 255 mm (4-1/4" x 10") 45° Miter, L/R: 92 x 268 mm (3-5/8" x 10-1/2")
No Load Speed (RPM)	4,400
Dimensions (L x W x H)	898x690x725 mm (35-1/4"x26-1/8"x28-1/2")
Net weight	30.7 - 31.3kg

DJR360ZK

Cordless Recipro Saw



18V X2 (36V) LXT BL Brushless Cordless Recipro Saw

- Our most powerful cordless reciprocating saw yet: Amazing work amount and work efficiency
- Higher cutting speed (Max 3,000 SPM) and modified stroke length (32 mm) provide higher cutting efficiency
- Newly designed vertical crank mechanism minimizes blade deflection and reduces vibration to machine
- Higher durability thanks to more durable mechanism to hold slider and more rigid shoe
- Two 18V LXT Li-Ion batteries deliver the power and run time for corded demands without leaving the 18V LXT platform



Length of Stroke	32 mm (1-1/4")
Strokes Per Minute (SPM)	High / Low: 0 - 3,000 / 0 - 2,300
Capacity	Pipe: 130 mm (5-1/8") Wood: 255 mm (10")
Vibration Level	Cutting Boards: 16.5 m/s ² Cutting Wooden Beams: 15.5 m/s ²
Sound Pressure Level	85 dB(A)
Sound Power Level	96 dB(A)
Dimensions (L x W x H)	449x116x243 mm (17-3/4"x4-9/16"x9-9/16")
Net weight	4.0 - 4.7 kg (8.9 - 10.3 lbs.)

DHR263ZK

Cordless Rotary Hammer



18V X2 (36V) LXT Li-Ion Cordless 26 mm (1") Combination Hammer, SDS-PLUS Bits

- 18V solution for corded power demands
- Two 18V LXT Li-Ion batteries deliver the power and run time for corded demands without leaving the 18V LXT platform
- Makita-built motor delivers 0-1,250 RPM, 0-5,000 BPM and 3.0 Joules (Makita value) of impact energy for faster drilling
- Vibration absorbing handle provides a sure and comfortable operation
- Ergonomic soft grip handle and large 2-finger trigger provide increased comfort on the job



Impact Energy	EPTA-Procedure 05/2009: 2.5 J
Capacity	Concrete / Steel / Wood:
	26 / 13 / 32 mm (1" / 1/2" / 1-1/4")
Blows Per Minute (BPM)	0 - 5,000
No Load Speed (RPM)	0 - 1,250
Vibration Level	14.5 m/s ² into concrete
Drilling Into Metal:	3.0 m/s ²
Sound Pressure Level	94 dB(A)
Sound Power Level	105 dB(A)
Dimensions (L x W x H)	350x116x232 mm (13-3/4"x4-9/16"x9-1/8")
Net weight	4.1 - 5.1 kg (9 - 11.3 lbs.)

DHR280ZWJ

Cordless Combination Hammer



18V X2 (36V) LXT BL AVT SOFT NO LOAD Cordless 28 mm (1-1/8") Combination Hammer, SDS-PLUS Bits

- BL Motor & AVT + SOFT NO LOAD Functions Deliver High Power and Low Vibration
- 18V solution for corded power demands
- Two 18V LXT Li-Ion batteries deliver the power and run time for corded demands without leaving the 18V LXT platform



Impact Energy	EPTA-Procedure 05/2009: 2.8 J
Capacity	Concrete / Steel / Wood / Core Bit / Diamond Core Bit (Dry Type):
	28 / 13 / 32 / 54 / 65 mm (1-1/8" / 1/2" / 1-1/4" / 2-1/8" / 2-9/16")
Blows Per Minute (BPM)	0 - 5,000
No Load Speed (RPM)	0 - 980
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
Vibration Level	Hammer Drilling into Concrete: 9.0 m/s ² Drilling Into Metal: 2.5 m/s ²
Sound Pressure Level	93 dB(A)
Sound Power Level	104 dB(A)
Dimensions (L x W x H)	373x134x232 mm (14-3/4"x5-1/4"x9-1/8")
Net weight	3.8kg


DHR400ZK

Cordless Rotary Hammer



18V X2 (36V) LXT BL AWS AVT SOFT NO LOAD Cordless 40 mm (1-9/16") Rotary Hammer, SDS-Max Bits, Dual LED Lights

- 8.0 Joules (EPTA) Impact Energy Delivers High Performance Equivalent to HR4013C
- Newly-developed BL motor delivers high power and excellent performance equivalent to corded model HR4013C
- Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Blue-tooth
- Low vibration achieved by Anti-Vibration Technology (AVT) & SOFT NO LOAD (suppression of motor speed during no-load)



Impact Energy	EPTA-Procedure 05/2009: 8.0 J
Capacity	Concrete (w/ TCT Bit): 40 mm (1-9/16")
Blows Per Minute (BPM)	1,450 - 2,900
No Load Speed (RPM)	250 - 500
Sound Pressure Level	91 dB(A)
Sound Power Level	102 dB(A)
Vibration Level	Hammer Drilling into Concrete: 5.0 m/s ²
Dimensions (L x W x H)	473x120x285 mm (18-5/8"x4-3/4"x11-1/4")
Net weight	7.3 - 8.1 kg (16.1 - 17.9 lbs.)


DUB361Z

Cordless Blower



18V X2 (36V) LXT Li-Ion Cordless 2-Speed Blower

- Delivers up to 73 minutes of run time using two 4.0Ah 18V LXT batteries on low speed setting
- Makita-built motor produces a maximum air velocity of 93 m/s
- 2-Speed (10,000 & 17,000 RPM) design for optimum speed control
- Compact and lightweight for single handed operation
- Push button air volume selection (High / Low settings)



XPT LXT



Max Air Volume	High: 4.4 m³/min (155 CFM) Low: 2.6 m³/min (92 CFM)
Max Air Velocity	High: 93 m/s (208 MPH) Low: 57 m/s (128 MPH)
No Load Speed (RPM)	High: 17,000 Low: 10,000
Sound Pressure Level	82.3 dB(A)
Sound Power Level	94.7 dB(A)
Vibration Level	2.5 m/s² or less
Dimensions (L x W x H)	905x141x194 mm (35-5/8"x5-5/8"x7-5/8")
Net weight	3.1 - 3.2 kg (6.8 - 7.1 lbs.)

DUB362Z

Cordless Blower



18V X2 (36V) LXT BL Brushless Cordless Variable 6-Speed Blower

- Our most powerful cordless blower yet: Amazing 54 m/s and 13.4 m³/min operation
- Delivers up to 28 minutes of run time at 15,800 RPM using two 18V LXT 5.0Ah batteries
- 6-Stage air velocity/volume selection dial with variable speed control trigger
- 3-Stage telescopic long nozzle with adjustment range of 100 mm for user convenience
- Compact and lightweight for single handed operation



BL MOTOR XPT LXT



Max Air Volume	13.4 m³/min (473 CFM)
Max Air Velocity	54 m/s (120 MPH)
No Load Speed (RPM)	11,400 - 21,500
Sound Pressure Level	79.1 dB(A)
Sound Power Level	93.5 dB(A)
Vibration Level	2.5 m/s² or less
Dimensions (L x W x H)	830/880/930x205x295 mm (32-3/4"/34-3/4"/36-5/8"x8-1/8"x11-5/8")
Net weight	3.5 - 4.2 kg (7.7 - 9.3 lbs.)


DUC256Z

Cordless Chain Saw



18V X2 (36V) LXT Li-Ion Cordless Chain Saw 250mm, Variable Speed, Brake, Soft Start

- Powered by two 18V LXT Li-Ion batteries
- Outer Rotor BL Motor provides high operating efficiency
- Chain brake and variable speed trigger switch produce high operability equivalent to 30mL class engine chain saw



Guide Bar Length	250 mm (10")
Chain Pitch	9.5mm (3/8")
Chain Gauge	1.3 mm
Chain Speed	0-20 m/s / 0-1,200m/min
Chain Oil Tank Volume	200mL (6.8 US oz)
Sound Pressure Level	103dB(A)
Vibration Level	Cutting Wood 3.2m/s²
Dimensions(L x W x H)	270x205x232mm
Net weight	4.6-5.1kg

DUC302Z

Cordless Chain Saw



18V X2 (36V) LXT Li-Ion 300mm Cordless Chain Saw

- Powered by two 18V LXT Li-Ion batteries
- Two 18V LXT Li-Ion batteries deliver power and performance without leaving the 18V LXT platform
- Low noise level and zero emissions for operator comfort
- "Tool-less" chain adjustment for convenient operation and maintenance
- Kickback brake & electric brake for maximum productivity and maximum operator safety



Guide Bar Length	300 mm (12")
Chain Pitch	3/8"
Chain Gauge	1.1 mm (0.043")
Chain Speed	8.3 m/s (500 m/min) (1,650 FPM)
Chain Oil Tank Volume	85 mL (2.9 US oz)
Sound Pressure Level	84.4 dB(A)
Sound Power Level	95.4 dB(A)
Vibration Level	Cutting Wood: 6.3 m/s²
Dimensions (L x W x H)	600x234x198 mm (23-5/8"x9-1/4"x7-3/4")
Net weight	4.7 kg(10.3 lbs.)

DUC400Z

Cordless Chain Saw



18V X2 (36V) LXT BL 400mm Brushless Cordless Chain Saw

- Powered by two 18V LXT Li-Ion batteries
- Two 18V LXT Li-Ion batteries deliver power and performance without leaving the 18V LXT platform
- Low noise level and zero emissions for operator comfort



Guide Bar Length	400 mm (16")
Chain Pitch	370 mm (14-1/2")
Chain Gauge	3/8"
Chain Speed	1.1 / 1.3 mm (0.043" / 0.050") 0 - 20 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Chain Oil Tank Volume	200 mL
Sound Pressure Level	87.7 dB(A)
Sound Power Level	100.4 dB(A)
Vibration Level	Cutting Wood: 5.3 m/s²
Dimensions (L x W x H)	800x215x235 mm with guide bar (31-1/2"x8-5/16"x9-1/4") with guide bar
Net weight	4.6 - 5.5 kg (10.5 - 12.1 lbs.)

DUA301Z

Cordless Telescopic Pole Saw



18V X 2 (36V) LXT BL AFT Cordless Telescopic Pole Saw

- High power BL motor delivers the same or higher operation efficiency than 30 mL class engine models
- Torque boost mode raises the current limit temporarily for easy cutting of trunks or thick limbs
- Lightweight pole saw head for easy access to a desired cutting position and reduced operator fatigue
- Ideal for pruning and limbing in tall trees or hard-to-reach areas



BL MOTOR XPT LXT AFT



Guide Bar Length	300 mm (12")
Recommended Guide Bar Length	250 - 300 mm (10- 12")
Max Cutting Length	300 mm (12")
Saw Chain	Gauge: 1.1/1/3 mm (0.043 / 0.050") Pitch: 3/8"
Chain Speed	0 - 20.0 m/s (0 = 1,200 m/min) (0 - 3,940 FPM)
Oil Tank Capacity	160mL
Dimensions (L x W x H)	w/o Guide Bar: 2,530 - 3,762 x 155 x191 mm (99-1/2 - 148 x 6-1/8 x 7-1/2")
Net weight	7.8 - 8.5 kg (17.2 - 18.7 lbs)

*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

* There is limited stock on some of the models. Please confirm availability.

DUH651Z

Cordless Hedge Trimmer



18V X2 (36V) LXT Li-Ion Cordless Hedge Trimmer

- 18V solution for corded power demands
- Two 18V LXT Li-Ion batteries deliver the power and performance for corded demands without leaving the 18V LXT platform
- Makita-built motor delivers 3,600 SPM for faster cutting
- 6 speed dial (2,000 - 3,600 SPM) allows the user to match the speed to the application



XPT



Blade Length	650 mm (25-1/2")
Strokes Per Minute (SPM)	2,000 - 3,600
Tooth Spacing	36 mm (1-7/16")
Sound Pressure Level	82 dB(A)
Sound Power Level	91.1 dB(A)
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	1,135x225x200 mm (44-3/4"x8-7/8"x7-7/8")
Net weight	4.7 - 5.5 kg

DUR368AZ

Cordless Grass Trimmer



18V X2 (36V) LXT BL Brushless Cordless 3-Speed Grass Trimmer, Bike Handle

- Automatic torque Drive Technology (ADT) adjusts speed and torque during operation for optimum performance
- Active Feedback sensing Technology (AFT) turns the motor off if blade rotation is suddenly forced to stop
- Makita-built Outer Rotor BL Brushless Motor direct-drive system provides high power and increased torque
- Constant speed control minimizes reduction in rotation speed under load



LXT BL MOTOR ADT AFT XPT



Cutting Width	Metal Blade: 230 mm (9") TCT Saw Blade: 255 mm (10") Nylon Cutting Head: 350 mm (13-3/4") Plastic Blade: 255 mm (10")
No Load Speed (RPM)	High / Mid / Low: 6,500 / 5,300 / 3,500
Spindle Size	M10 x 1.25 LH
Sound Pressure Level	4-Tooth Blade: 74.7 dB(A)
Sound Power Level	4-Tooth Blade: 89.2 dB(A)
Sound Pressure Level	Nylon Cutting Head: 76.4 dB(A)
Sound Power Level	Nylon Cutting Head: 89 dB(A)
Vibration Level	Left / Right: 2.5 / 2.5 m/s ² or less
Dimensions (L x W x H)	1,758 x 615 x 442 mm (69-1/4 x 24-1/4 x 17-3/8)
Net weight	4.1 - 4.75 kg (9.0 - 10.5 lbs.)

*Standard with nylon cutting head.

DUR368LZ

Cordless Grass Trimmer



18V X2 (36V) LXT BL ADT AFT Cordless 3-Speed Grass Trimmer, Loop Handle

- Automatic torque Drive Technology (ADT) adjusts speed and torque during operation for optimum performance
- Active Feedback sensing Technology (AFT) turns the motor off if blade rotation is suddenly forced to stop
- Makita-built Outer Rotor BL Brushless Motor direct-drive system provides high power and increased torque
- Constant speed control minimizes reduction in rotation speed under load



LXT BL MOTOR ADT AFT XPT



Cutting Width	Metal Blade: 230 mm (9") TCT Saw Blade: 255 mm (10") Nylon Cutting Head: 350 mm (13-3/4") Plastic Blade: 255 mm (10")
No Load Speed (RPM)	High / Mid / Low: 6,500 / 5,300 / 3,500
Spindle Size	M10 x 1.25 LH
Sound Pressure Level	4-Tooth Blade: 74.7 dB(A)
Sound Power Level	4-Tooth Blade: 89.2 dB(A)
Sound Pressure Level	Nylon Cutting Head: 76.4 dB(A)
Sound Power Level	Nylon Cutting Head: 89 dB(A)
Vibration Level	Left / Right: 2.5 / 2.5 m/s ² or less
Dimensions (L x W x H)	1,758 x 362 x 231 mm (69-1/4 x 14-1/4 x 9-1/8")
Net weight	3.9 - 4.5 kg (8.6 - 10.0 lbs.)

*Standard with nylon cutting head.

DLM382DZ

Cordless Lawn Mower



18V X2 (36V) LXT Li-Ion Cordless 38 cm (15") 2-in-1 Mower

- Mulching (with optional accessory)
- Two 18V LXT Li-Ion batteries deliver the power and run time for corded demands without leaving the 18V LXT platform
- Grass box with grass level indicator
- XPT (eXtreme Protection Technology) dust and drip-proof performance is enhanced for use in bad weather



LXT XPT



Cutting Width	380 mm (15")
Cutting Height	20 - 75 mm (13/16" - 2-15/16")
No Load Speed (RPM)	3,700
Dimensions (L x W x H)	DLM382: 1,380-1,410x450x985-1,005 mm
Net weight	16.2 - 16.9 kg (35.7 - 37.3 lbs.)

DLM432Z

Cordless Lawn Mower



18V X2 (36V) LXT Li-Ion Cordless 38 cm (15") / 43 cm (17") 2-in-1 Mower

- Mulching (with optional accessory)
- Two 18V LXT Li-Ion batteries deliver the power and run time for corded demands without leaving the 18V LXT platform
- Grass box with grass level indicator
- XPT (eXtreme Protection Technology) dust and drip-proof performance is enhanced for use in bad weather



LXT XPT



Cutting Width	430 mm (17")
Cutting Height	20 - 75 mm (13/16" - 2-15/16")
No Load Speed (RPM)	3,600
Dimensions (L x W x H)	1,435-1,490x460x1,005-1,045 mm (56-1/2"-58-3/4"x 18-1/8"x39-1/2"-41-1/4")
Net weight	16.8 - 17.5 kg (36.6 - 38.6 lbs.)

DLM461Z

Cordless Lawn Mower



18V X2 (36V) LXT BL Brushless Cordless 46 cm (18") 3-in-1 Mower

- 800 m² Large mowing area
- Soft no load automatically reduces the motor speed according to load condition for low noise
- Low noise mode provides rotation speed (2,500 RPM) by constant speed control
- Wide 46 cm (18") robust steel cutting deck for increased durability
- IPX4 water resistant for use in bad weather



Blade Type	2 Tooth
Hole Diameter	10.0 mm (3/8")
Cutting Width	460 mm (18")
Cutting Height	20 - 75 mm (13/16" - 2-5/16")
No Load Speed (RPM)	2,500 - 3,300
Recommended mowing area	w/ BL1860B x2: 800 - 1,600 m²
	w/ BL1850B x2: 680 - 1,360 m²
	w/ BL1830B x2: 380 - 760 m²
	w/ BL1860B / BL1850B / BL1840B / BL1830B
Continuous Use (min.)	BL1815N: 21 / 18 / 14 / 10 / 6
Sound Pressure Level	79 dB(A)
Sound Power Level	91 dB(A)
Vibration Level	2.5 m/s² or less
Dimensions (L x W x H)	During operation: 1,319-1,518x532x879-1,138 mm
Net weight	25.3 - 27.6 kg (55.8 - 60.8 lbs.)

*Standard with Blade Part No. 197761-2

DUP362Z

Battery Powered Pruning Shears



18V X2 (36V) LXT Li-Ion Battery Powered Pruning Shears

- High cutting performance.
- Smooth cutting similar to that of a hand pruner



Capacity	
Max Cutting	33 mm (1-5/16")
Cutting Torque	250N
Dimensions (L x W x H)	305x43x106 mm
Net weight	0.77 - 0.82 kg

DDG460ZX1

Cordless Earth Auger



18V X2 (36V) LXT Brushless Cordless Earth Auger

- Earth auger attachment includes a bar which receives reaction force and an auxiliary handle, and helps the user drill holes in the ground easier
- Reversing switch enables to extract, in reverse rotation mode, an auger bit jammed in soil with high resistance like clay soil
- Lightweight design for reduced operator fatigue
- Auger bit adapter enables to use the auger bits for popular engine earth augers
- BL motor delivers 1,400 RPM



Capacity	Sandy Soil: 200 mm Clay Soil: 150 mm
No Load Speed (RPM)	High / Low: 0 - 1,400 / 0 - 350
Max Fastening Torque	High: 48 N-m (430 in.lbs.) Low: 136 N-m (1,210 in.lbs.)
Vibration Level	2.5 m/s² or less
Sound Pressure Level	85 dB(A)
Sound Power Level	96 dB(A)
Dimensions (L x W x H)	840 x 607 x 223 mm (33 x 23-7/8 x 8-3/4")
Net weight	7.3 - 8.2 kg (16.1 - 18.1 lbs.)

Chuck Key, Hex Wrench, Adapter.

PDC01

Portable Power Pack



18V / 18V X2 (36V) LXT Li-Ion Portable Power Pack

- "Simple" Portable Power Supply Unit powered by multiple LXT batteries
- Powered by up to four 18V LXT batteries
- The user of 18V LXT batteries can get longer run time at less cost
- Compatible with 18V LXT / 18V x2 LXT 36V direct power connection
- Also can be used as a stationary power pack by detaching the backpack harness



Capacity	24 / 12 Ah
Energy Capacity	432 Wh
Dimensions (L x W x H)	400 x 195 x 132 mm (15-3/4 x 7-5/8 x 5-3/16")
Net weight	2.8 kg (6.1 lbs.) (without battery)

PDC1200A01

Portable Power Pack



18V X2 (36V) LXT Li-Ion Portable Power Pack

- 1,200 Wh high capacity
- Enables a DUB362 to operate over 1 hour at the highest speed (at dial 6)
- Equipped with built-in battery cells
- Compatible with 18Vx2 LXT, 36V direct power connection

Harness, Adapter for 36V (18V x2)



Capacity	33.5 Ah
Energy Capacity	1,206 Wh
Number of Cells	100
Charging Time (hours)	6
Dimensions (L x W x H)	w/o Harness: 369 x 261 x 139 mm (14-1/2 x 10-1/4 x 5-1/2") w/ Harness: 428 x 261 x 164 mm (16-7/8 x 10-1/4 x 6-1/2")
Net weight	w/o Harness: 8.8 kg (19.4 lbs.) w/ Harness: 10.4 kg (22.9 lbs.)

*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

* There is limited stock on some of the models. Please confirm availability.





PRODUCTS

▣ CORDLESS TOOLS



- Variable Speed
- Brake
- Reversing
- Mechanical 2-Speed
- Mechanical 3-Speed
- Electronic 2-Speed
- Electronic 3-Speed
- Electronic 4-Speed
- Keyless Chuck
- Torque Setting 16
- Torque Setting 18
- Torque Setting 20
- Torque Setting 21
- SDS-PLUS Shank
- SDS-MAX Shank
- Torque Limiter
- Constant Speed
- Soft Start
- Bevel Cutting 45 left
- Bevel Cutting 45 LR
- Bevel Cutting L45 R5
- Orbital Cutting
- Bayonet Shank Jig Saw Blade
- Laser Marker
- Hook & Loop
- Depth Adjustment
- Sequential and Bump-fire
- Auto Firing Stop
- Anti Vibration
- Automatic Oiling
- Chain Brake
- Revolving Hose
- Static Free Hose
- Dust Collection
- Built-in Job Light
- Carrying Case

Li-Ion Battery & Charger Time Reference, Compatibility Chart

18V Lithium-ion		DC18RC Fast Charger	DC18SE Automotive Charger	DC18RD Two Port Multi Fast Charger
6.0 Ah	 BL1860B (197422-4) *BL1860B with Battery Fuel Gauge*	WITH DC18RC 55 min. Fast Charging	WITH DC18SE 130 min.	
5.0 Ah	 BL1850B (197280-8) *BL1850B with Battery Fuel Gauge*	45 min. Fast Charging	110 min.	
3.0 Ah	 BL1830B (197599-5) *BL1830B with Battery Fuel Gauge*	22 min. Fast Charging	60 min.	
1.5 Ah	 BL1815N (632A54-1)	15 min. Fast Charging	30 min.	<p>No discharging required</p> <p>Shock Absorbing Heavy Duty Pack</p> <p>Longtime Storage Low Self Discharge</p>

710%

Extreme Stamina (5.0Ah) Life time work volume

The figure is a relative value when the amount of Ni-Cd 1.9Ah is indexed at 100.

The built-in CPU in battery records the battery usage history and transmits it to the charger.



Digital Communication

Built-in CPU

The CPU built in the charger analyzes its condition; high temperature, re-charge after full charged, over-discharging. The battery lasts long life because it can be charged at the best method and time.




40%Lighter



MAKITA
18V
Ni-MH 2.8Ah


MAKITA
18V Li-ion 5.0Ah




Firm Holding

Multi-contact terminals reduce electrical resistance and increase connection stability withstanding against vibration, and ultimately ensures Stable current supply to the tool.



DGA452ZK
18V LXT Li-Ion Cordless Angle Grinder, Anti-Restart Function, Slide Switch Lock-On
Cordless Angle Grinder



Wheel Diameter	115 mm (4-1/2")
No Load Speed (RPM)	11,000
Vibration Level	Surface Grinding: 10.0 m/s ² Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	76 dB(A)
Dimensions (L x W x H)	317x129x126 mm (12-1/2"x5-1/8"x5")
Net weight	2.06 - 2.71 kg (4.53 - 5.97 lbs.)

DGA456ZJ
18V LXT BL ADT AFT Cordless Angle Grinder, Anti-Restart Function, Electric Brake, Slide Switch Lock-On
Cordless Angle Grinder


Wheel Diameter	115 mm (4-1/2")
No Load Speed (RPM)	8,500
Vibration Level	Surface Grinding w/ Anti-Vibration Side Grip: 6.0 m/s ² Disc Sanding w/ Anti-Vibration Side Grip: 2.5 m/s ² or less
Sound Pressure Level	79 dB(A)
Dimensions	362x130x151 mm (14-1/4"x5-1/8"x5-15/16")
Net weight	2.34 - 3.03 kg (5.17 - 6.67 lbs.)

DGA458ZJ
18V LXT BL ADT AFT Cordless Angle Grinder, Anti-Restart Function, Electric Brake, Paddle Switch No-Lock
Cordless Angle Grinder


Wheel Diameter	115 mm (4-1/2")
No Load Speed (RPM)	8,500
Vibration Level	Surface Grinding w/ Anti-Vibration Side Grip: 5.0 m/s ² Disc Sanding w/ Anti-Vibration Side Grip: 2.5 m/s ² or less
Sound Pressure Level	80 dB(A)
Dimensions	362x130x151 mm (14-1/4"x5-1/8"x5-15/16")
Net weight	2.34 - 3.03 kg (5.17 - 6.67 lbs.)

DGA463ZJ
18V LXT BL Cordless Angle Grinder, Variable Speed, Anti-Restart Function, Electric Brake, Slide Switch Lock-On
Cordless Angle Grinder


Wheel Diameter	115 mm (4-1/2")
No Load Speed (RPM)	3,000 - 8,500
Vibration Level	Surface Grinding w/ Anti-Vibration Side Grip: 6.0 m/s ² Disc Sanding w/ Anti-Vibration Side Grip: 2.5 m/s ² or less
Sound Pressure Level	79 dB(A)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 382x130x151 mm (15"x5-1/8"x5-15/16")
Net weight	2.3 - 3.0 kg (5.1 - 6.7 lbs.)

DPB180ZK
18V LXT Li-Ion Cordless Portable Band Saw
Cordless Portable Band Saw


- 120 x 120 mm (4-3/4" x 4-3/4") Cutting Capacity
- 6-Setting variable speed control dial enables user to match the speed to the application
- Built-in L.E.D. protection circuit with over-torque control protects motor
- Protective bumper design for added durability
- Tool hook secures the tool when not in use

Capacity	Round: 120 mm (4-3/4") Rectangular work-piece w/o stand :
	120x120 mm (4-3/4"x4-3/4")
Blade speed	1.4-2.7 m/s (275-530 ft/min.)
Dimensions (L x W x H)	523x231x13 mm (20-5/8"x9-1/8"x12-3/8")
Net weight	6.8 - 7.1 kg (14.9 - 15.7 lbs.)

DCG180ZK
18V LXT Li-Ion Cordless Caulking Gun
Cordless Caulking Gun


- Delivers an industry-leading 5,000 N (1,100 lbs) of dispensing force to work with the highest viscosity adhesives and sealants
- 5 Speed dial optimizes flow rate from 0 - 28 mm/sec. (0 - 66 IPM)
- Variable speed trigger allows user to match the speed to the application

Max Dispensing Force	5,000 N (1,100 lbs)
No load speed	0 - 28 mm/sec. (0 - 66 in/min.)
Holder Size	300, 600, 800 mL
Sound Pressure Level	70 dB(A) or less
Vibration Level	Operation w/o Load: 2.5 m/s ² or less
Dimensions (L x W x H)	404x108x281 mm (15-7/8"x4-1/4"x11-1/8")
Net weight	2.1 - 3.0 kg (4.7 - 6.6 lbs.)

DSS610ZJ
18V LXT Li-Ion Cordless 165 mm (6-1/2") Circular Saw, Electric Brake, LED Light
Cordless Circular Saw


- Lightweight and compact design
- Smooth cutting at high rotational speed of 3,700 RPM
- Built-in dust blower directs sawdust away from cutting line
- Built-in LED job light for more illuminated accurate work



Blade Diameter	165 mm (6-1/2")
Max Cutting Capacity	90°: 0-57 mm (2-1/4") 45°: 0-40 mm (1-9/16") 50°: 0-36 mm (1-7/16")
No Load Speed (RPM)	3,700
Dimensions (L x W x H)	347x202x228 mm
Net weight	3.0 - 3.4 kg (6.7 - 7.5 lbs.)

*Standard with Blade Part no. A-85101

DHS680ZJ
18V LXT BL ADT Cordless 165 mm (6-1/2") Circular Saw, Electric Brake, Soft Start, Dual LED Lights
Cordless Circular Saw


- High-efficiency BL motor provides higher power and more work amount
- Smooth cutting at high rotational speed of 5,000 RPM
- Compact and lightweight design
- ADT (Automatic Torque Drive Technology) adjusts speed and torque during operation for optimum performance
- Blower function blows sawdust to the cut line ahead for a better cutting view

Our first cordless circular saw powered by 18V Li-ion battery



Blade Diameter	165 mm (6-1/2")
Max Cutting Capacity	90°: 57 mm (2-1/4") 45°: 41 mm (1-5/8") 50°: 37 mm (1-7/16")
No Load Speed (RPM)	5,000
Vibration Level	Cutting Wood: 2.5 m/s ² or less
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	350x170x238 mm (13-3/4"x6-11/16"x9-3/8")
Net weight	3 - 3.3 kg (6.6 - 7.3 lbs.)

*Standard with Blade Part no. A-85101

DCS553ZJ
18V LXT BL ADT Cordless 150 mm (5-7/8") Metal Cutter, Electric Brake, Soft Start, Dual LED Lights
Cordless Metal Cutter


- Drastically shortened overall length for increased manoeuvrability
- Built-in dust collection box for cleaner work environment
- Metal chip/dust can be thrown away by just opening the dust box cap
- Increased speed (4,200 RPM) provides more comfortable operation for light load application
- Cuts 51 mm (2") conduit in a single pass



Blade Diameter	150 mm (5-7/8")
Max Cutting Capacity	90°: 57.5 mm (2-1/4")
No Load Speed (RPM)	4,200
Vibration Level	Cutting Metal: 2.5 m/s ² or less
Sound Pressure Level	103 dB(A)
Sound Power Level	114 dB(A)
Dimensions (L x W x H)	267x186x250 mm (10-1/2"x7-3/8"x9-7/8")
Net weight	2.8 - 3.1 kg (6.1 - 6.8 lbs.)

*Standard with Blade Part no. B-46296

DVR450Z
18V LXT Li-Ion Cordless Concrete Vibrator
Cordless Concrete Vibrator



- Light weight for comfortable operation, flexible shaft assembly
- Makita-built motor delivers 12,500 VPM to help increase strength of concrete
- Up to 41 minute run-time under load with BL1850B
- Dual switch for max control in horizontal and vertical positions
- Protective cover on switch and battery prevents contamination



Diameter of vibrator	25 mm (1")
Length	1,200 mm (4.0 ft)
Vibrations Per Minute	13,000 (VPM)
Dimensions (L x W x H)	1,483x93x250 mm (58-1/2"x3-5/8"x9-7/8")
Net weight	3.3 - 3.8 kg (7.3 - 8.3 lbs.)

DSD180ZJ
18V LXT Li-Ion Cordless Drywall Saw
Cordless Drywall Saw


- Ideal for cutting holes in drywalls when setting ceiling lights, air vents etc
- More suitable for straight cuts compared with general cut-out tools
- Dust box designed to catch dust in overhead applications for comfortable work
- Excellent tool balance allows easy overhead application
- Easy straight cutting achieved by the blade shape and cutting system



Strokes Per Minute	0 - 6,000
Length of Stroke	6 mm (1/4")
Capacity	Drywall: 30 mm (1-3/16") Wood: 15 mm (9/16")
Vibration Level	Cutting Drywall (thickness 30mm): 2.5 m/s ² Cutting Chip Board (thickness 15mm): 5.0 m/s ²
Sound Pressure Level	79 dB(A)
Dimensions (L x W x H)	263x79x291 mm (10-3/8"x3-1/8"x11-3/8")
Net weight	1.7 - 2.0 kg (3.8 - 4.5 lbs.)

DCO180Z
18V LXT Li-Ion Cordless 6.35 mm (1/4") Cut-Out Tool
Cordless Cut-Out Tool


- Makita-built motor delivers 30,000 RPM for fast cutting
- Vent slots direct air and debris away from the operator
- Slide switch with lock-on for operator convenience
- Slim body design (2-1/4" diameter) for comfort and control
- Lightweight for reduced operator fatigue



Capacity	Collet: 6.35 mm (1/4")
No Load Speed (RPM)	30,000
Dimensions (L x W x H)	316x77x118 mm
Net weight	1.5 - 1.8 kg (3.3 - 4 lbs.)

*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

*There is limited stock on some of the models. Please confirm availability.

DGD800Z

Cordless Die Grinder



18V LXT Li-Ion Cordless 8 mm (1/4") Die Grinder

- Compact barrel grip design and lightweight for easy handling
- Slide switch with lock-on for operator convenience
- Vent slots designed to direct exhaust air away from the user
- L.E.D. Light flashes red when it is time to recharge the battery
- Built-in L.E.D. protection circuit with over-torque control protects the motor



18V

Capacity	Collet : 3 mm - 8 mm
Wheel Diameter	38 mm (1-1/2")
No Load Speed (RPM)	26,000
Dimensions (L x W)	402x82x118 mm (15-3/4"x3-1/4"x4-5/8")
Net weight	1.7 - 2.2 kg (3.8 - 4.9 lbs.)


DGD801ZK

Cordless Die Grinder



18V LXT Li-Ion Cordless 8 mm (1/4") Die Grinder

- Now free from cord for easy job site portability
- Short-nose type
- Solid aluminium bearing box with 43mm diameter neck to attach various accessories
- Vent slots designed to direct exhaust air away from operator
- Easy to grip motor housing with small circumference



18V

Capacity	Collet : 3 mm - 8 mm
Wheel Diameter	38 mm (1-1/2")
No Load Speed (RPM)	25,000
Dimensions (L x W x H)	307x82x118 mm (12-1/8"x3-1/4"x4-5/8")
Net weight	1.5 - 2 kg (3.3 - 4.3 lbs.)


DDA350K

Cordless Angle Drill



18V LXT Li-Ion Cordless 10 mm (3/8") Angle Drill, Keyless Chuck

- Compact angle head with a small head height of 8mm
- Original 4-pole motor for power, lightweight and compact size
- LED job light with afterglow function
- Ergonomically designed rubberised soft grip
- Easy-to-operate large paddle switch trigger



Capacity	Steel: 10 mm (3/8")
	Wood: 25 mm (1")
No Load Speed (RPM)	0-1,800
Dimensions (L x W x H)	314x79x115 mm (12-3/8"x3-1/8"x4-1/2")
Net weight	1.5 - 1.8 kg (4.1 - 3.4 lbs.)

DDF484ZJ

Cordless Driver Drill



18V LXT BL Brushless Cordless 13 mm (1/2") 60 N·m (530 in.lbs.) Driver Drill

- Delivers 25% more drilling, driving and fastening speed than previous model
- Aluminium gear housing creates an impression of rigidity and luxuriousness
- Compact and ergonomic design at only 172 mm (6-3/4") long
- Variable 2-speed (0-500 & 0-2,000 RPM) for a wide range of drilling and fastening applications
- Built-in twin LED lights with pre-glow and afterglow functions illuminate the work area



Capacity	Steel / Wood: 13 / 38 mm (1/2" / 1-1/2")
Chuck capacity	1.5 - 13 mm (1/16 - 1/2")
No Load Speed (RPM)	High / Low: 0 - 2,000 / 0 - 500
Max Fastening Torque	Hard / Soft: 54 / 30 N·m (480 / 270 in.lbs.)
Max lock torque	60 N·m (530 in.lbs.)
Vibration Level	Drilling Into Metal: 2.5 m/s ² or less
Sound Pressure Level	76 dB(A)
Dimensions (L x W x H)	172x79x261 mm (6-3/4"x3-1/8"x10-1/4")
Net weight	1.5 - 1.8 kg (3.3 - 4.0 lbs.)

DDF486ZJ

Cordless Driver Drill



18V LXT BL Brushless Cordless 13 mm (1/2") 125 N·m (1,100 in.lbs.) Driver Drill

- An efficient brushless tool with two speed ranges for screwdriving and drilling for professional use.
- Max. torque of 130 / 65 Nm.
- A versatile tool for fitters, builders and maintenance staff.
- Integrated LED light.



Capacity	Steel: 13 mm (1/2"), Wood (Auger-Bit): 50 mm (2")
	Wood (Self-Feed Bit): 76 mm (3")
	Wood (Hole Saw): 152 mm (6")
	Siding Board: 170 mm (6-11/16")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
No Load Speed (RPM)	High / Low: 0 - 2,100 / 0 - 550
Max Fastening Torque	Hard / Soft: 130 / 65 N·m (1,150 / 580 in.lbs.)
Max Lock Torque	125 N·m (1,100 in.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B : 178 x 81 x 265 mm (6-3/16 x 3-3/16 x 10-3/8")
Net weight	2.3 - 2.6 kg (5.1 - 5.7 lbs.)

DDF487ZJ

Cordless Driver Drill



18V LXT BL Brushless Cordless 13 mm (1/2") 40 N·m (350 in.lbs.) Driver Drill

- An efficient brushless tool with two speed ranges for screwdriving and drilling for professional use.
- Max. torque of 40 / 23 Nm.
- A versatile tool for fitters, builders and maintenance staff.
- Integrated LED light.




Capacity	Steel / Wood: 13 / 36 mm (1/2" / 1-7/16")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
No Load Speed (RPM)	High / Low: 0 - 1,700 / 0 - 500
Max Fastening Torque	Hard / Soft: 40 / 23 N·m (350 / 210 in.lbs.)
Max Lock Torque	40 N·m (350 in.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B : 157 x 81 x 248 mm (6-3/16 x 3-3/16 x 9-3/4")
Net weight	1.3 - 1.6 kg (2.9 - 3.5 lbs.)

DHP453ZK

18V LXT Li-Ion Cordless 13 mm (1/2") Impact Driver Drill

Cordless Impact Driver Drill



18V


Capacity	Steel: 13 mm (1/2"), Wood: 36 mm (1-7/16") Masonry: 13 mm (1/2")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High: 0-19,500 / Low: 0-6,000
No Load Speed (RPM)	High: 0-1,300 Low: 0-400
Max Fastening Torque	Hard / Soft: 42 / 27 N-m
Max lock torque	38 N-m (340 in.lbs.)
Dimensions (L x W x H)	240x79x244 mm (9-7/16"x3-1/8"x9-5/8")
Net weight	1.7 - 2 kg (3.6 - 4.4 lbs.)

DHP453RYE

18V LXT Li-Ion Cordless 13 mm (1/2") Impact Driver Drill Kit

Cordless Impact Driver Drill Kit

Includes :2 x BL1815N batteries and 1 x DC18RC charger.



18V

Capacity	Steel: 13 mm (1/2"), Wood: 36 mm (1-7/16") Masonry: 13 mm (1/2")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High: 0-19,500 / Low: 0-6,000
No Load Speed (RPM)	High: 0-1,300 Low: 0-400
Max Fastening Torque	Hard / Soft: 42 / 27 N-m
Max lock torque	38 N-m (340 in.lbs.)
Dimensions (L x W x H)	240x79x244 mm (9-7/16"x3-1/8"x9-5/8")
Net weight	1.7 - 2 kg (3.6 - 4.4 lbs.)

DHP482ZJ

18V LXT Li-Ion Cordless 13 mm (1/2") 54 N-m (480 in.lbs.) Impact Driver Drill

Cordless Impact Driver Drill

- High speed model with compact and lightweight design
- Compact overall length: 198 mm for increased manoeuvrability
- Lightweight for reduced operator fatigue
- Higher speed of 1,900 RPM (High) and 600 RPM (Low)
- Variable 2-speed transmission (0-600 & 0-1,900 RPM) for a wide range of drilling and fastening applications



Capacity	Steel / Wood / Masonry: 13 / 38 / 13 mm (1/2" / 1-1/2" / 1/2")
Chuck capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High / Low: 0 - 28,500 / 0 - 9,000
No Load Speed (RPM)	High / Low: 0 - 1,900 / 0 - 600
Max Fastening Torque	Hard / Soft: 62 / 36 N-m (550 / 320 in.lbs.)
Max lock torque	54 N-m (480 in.lbs.)
Vibration Level	Hammer Drilling into Concrete: 6.0 m/s ² Drilling Into Metal: 2.5 m/s ² or less
Dimensions (L x W x H)	198x79x249 mm (7-3/4"x3-1/8"x9-3/4")
Net weight	1.5 - 1.8 kg (3.4 - 4.1 lbs.)

DHP482RFE

18V LXT Li-Ion Cordless 13 mm (1/2") Impact Driver Drill Kit

Cordless Impact Driver Drill Kit

Includes: 2 x BL1830B batteries and 1 x DC18RC charger.



Capacity	Steel / Wood / Masonry: 13 / 38 / 13 mm (1/2" / 1-1/2" / 1/2")
Chuck capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High / Low: 0 - 28,500 / 0 - 9,000
No Load Speed (RPM)	High / Low: 0 - 1,900 / 0 - 600
Max Fastening Torque	Hard / Soft: 62 / 36 N-m (550 / 320 in.lbs.)
Max lock torque	54 N-m (480 in.lbs.)
Vibration Level	Hammer Drilling into Concrete: 6.0 m/s ² Drilling Into Metal: 2.5 m/s ² or less
Dimensions (L x W x H)	198x79x249 mm (7-3/4"x3-1/8"x9-3/4")
Net weight	1.5 - 1.8 kg (3.4 - 4.1 lbs.)

DHP484ZJ

18V LXT BL Brushless Cordless 13 mm (1/2") 60 N-m (530 in.lbs.) Driver Drill

Cordless Impact Driver Drill

- Delivers up to 55% higher hammer drilling speed than previous model
- Aluminium gear housing creates the impression of rigidity of the machine
- Compact and ergonomic design at only 182 mm (7-1/8") long
- Variable 2-speed (0-500 & 0-2,000 RPM) for a wide range of drilling, fastening and hammer drilling applications
- 0-30,000 IPM for fast hammer drilling in masonry materials



Capacity	Steel / Wood / Masonry: 13 / 38 / 13 mm (1/2" / 1-1/2" / 1/2")
Chuck capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High / Low: 0 - 30,000 / 0 - 7,500
No Load Speed (RPM)	High / Low: 0 - 2,000 / 0 - 500
Max Fastening Torque	Hard / Soft: 54 / 30 N-m (480 / 270 in.lbs.)
Max lock torque	60 N-m (530 in.lbs.)
Vibration Level	Hammer Drilling into Concrete: 8.0 m/s ² Drilling Into Metal: 2.5 m/s ² or less
Sound Pressure Level	88 dB(A)
Sound Power Level	99 dB(A)
Dimensions (L x W x H)	182x79x261 mm (7-1/8"x3-1/8"x10-1/4")
Net weight	1.6 - 1.9 kg (3.5 - 4.2 lbs.)

DHP485ZJ

18V LXT BL Brushless Cordless 13 mm (1/2") 50 N-m (440 in.lbs.) Impact Driver Drill

Cordless Impact Driver Drill

- Max 1,900 RPM, 28,500 IPM & 50 N-m (440 in.lbs.) for increased efficiency
- Compact design for reduced operator fatigue
- Dual LED lights with pre-glow and afterglow functions illuminate the work area
- Ergonomically designed grip for comfortable handling
- Variable 2-speed (0-500 & 0-1,900 RPM) for a wide range of drilling, fastening and hammer drilling applications



Capacity	Steel / Wood / Masonry: 13 / 38 / 13 mm (1/2" / 1-1/2" / 1/2")
Chuck capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High / Low: 0 - 28,500 / 0 - 7,500
No Load Speed (RPM)	High / Low: 0 - 1,900 / 0 - 500
Max Fastening Torque	Hard / Soft: 50 / 27 N-m (440 / 240 in.lbs.)
Max lock torque	50 N-m (440 in.lbs.)
Vibration Level	Hammer Drilling into Concrete: 8.0 m/s ² Drilling Into Metal: 2.5 m/s ² or less
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions (L x W x H)	182x79x255 mm (7-1/8"x3-1/8"x10")
Net weight	1.5 - 1.8 kg (3.2 - 3.9 lbs.)

*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

* There is limited stock on some of the models. Please confirm availability.

DHP458ZK

Cordless Impact Driver Drill



18V LXT Li-Ion Cordless 13 mm (1/2") 84 N.m (750 in.lbs.) Impact Driver Drill

- Mechanical 2-speed transmission (0 - 400 & 0 - 2,000 RPM) covers a wide range of drilling, fastening and hammer drilling applications
- Compact design at only 225 mm (8-7/8") long and lightweight for reduced operator fatigue
- Extreme Protection Technology (XPT) is engineered for improved dust and water resistance for operation in harsh conditions



XPT 18V



Capacity	Steel: 13 mm (1/2") Wood: 76 mm (3") Masonry: 16 mm (5/8")
No Load Speed (RPM)	High: 0-2,000 Low: 0-400
Impacts Per Minute (IPM)	High: 0-30,000 Low: 0-6,000
Max Fastening Torque	Hard / Soft: 91 / 58 N-m
Max Lock Torque	84 N-m (750 in.lbs.)
Dimensions (L x W x H)	225x79x259 mm (8-7/8"x3-1/8"x10-1/4")
Net weight	2.2 - 2.6 kg (4.9 - 5.7 lbs.)

DHP486ZJ

Cordless Impact Driver Drill



- An efficient brushless tool with two speed ranges for screwdriving and drilling for professional use.
- Max. torque of 130 / 65 Nm.
- A versatile tool for fitters, builders and maintenance staff.
- Integrated LED light.



BL MOTOR LXT XPT 18V



Capacity	Steel: 13 mm (1/2"), Wood (Auger-Bit): 50 mm (2") Masonry: 16 mm (5/8"), Siding Board: 170 mm (6-11/16")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High / Low: 0 - 31,500 / 0 - 8,250
No Load Speed (RPM)	High / Low: 0 - 2,100 / 0 - 550
Max Fastening Torque	Hard / Soft: 130 / 65 N-m (1,150 / 580 in.lbs.)
Max Lock Torque	125 N-m (1,100 in.lbs.)
Dimensions (L x W x H)	Impact Drilling into Concrete: 8.0 m/s ²
Net weight	178 x 81 x 265 mm (7 x 3-3/16 x 10-3/8") 2.3 - 2.7 kg (5.1 - 6.0 lbs.)

DHP487ZJ

Cordless Impact Driver Drill



- An efficient, brushless drill for screwdriving and drilling with or without hammer action, two power settings.
- Max. torque of 40 / 23 Nm.
- A versatile tool for fitters, builders and maintenance staff.
- Integrated LED light.



BL MOTOR LXT XPT 18V



Capacity	Steel / Wood / Masonry : 13 / 36 / 13 mm (1/2" / 1-7/16" / 1/2")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High / Low: 0 - 25,500 / 0 - 7,500
No Load Speed (RPM)	High / Low: 0 - 2,100 / 0 - 550
Max Fastening Torque	Hard / Soft: 40 / 23 N-m (350 / 210 in.lbs.)
Max Lock Torque	40 N-m (350 in.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B : 164 x 81 x 248 mm (6-1/2 x 3-3/16 x 9-3/4")
Net weight	1.4 - 1.7 kg (3.1 - 3.8 lbs.)


DTD152Z

Cordless Impact Driver



18V LXT Li-Ion Cordless 165 N-m (1,460 in.lbs.) Impact Driver

- Developed for main applications such as tightening of self-drilling screws or light duty machine screws
- Delivers 2,900 max RPM and 165 N-m (1,460 in.lbs.) of max torque
- Compact and lightweight design
- Aluminium hammer case creates the impression of rigidity of the machine
- Dual LED lights with pre-glow and afterglow functions illuminate the work area more widely



XPT



Capacity	Machine Screw: M4 - M8 (5/32" - 5/16") Standard Bolt: M5 - M16 (3/16" - 5/8") High Tensile Bolt: M5 - M12 (3/16" - 1/2") Coarse thread (in length): 22 - 125 mm (7/8" - 4-7/8")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	0 - 2,900
Impacts Per Minute (IPM)	0 - 3,500
Max Fastening Torque	165 N-m (1,460 in.lbs.)
Vibration Level	10.5 m/s ²
Sound Pressure Level	93 dB(A)
Sound Power Level	104 dB(A)
Dimensions (L x W x H)	137x79x238 mm (5-3/8"x3-1/8"x9-3/8")
Net weight	1.3 - 1.6 kg (2.8 - 3.5 lbs.)

DTD153ZJ

Cordless Impact Driver



18V LXT BL Brushless Cordless 170 N-m (1,500 in.lbs.) Impact Driver

- Higher speed 3,400 RPM, More powerful 170 N-m (1,500 in.lbs.) and more compact 126 mm long
- BL motor delivers 3,400 max RPM and 170 N-m (1,500 in.lbs.) of max torque
- Compact and lightweight design
- Aluminium hammer case creates the impression of rigidity of the machine
- Dual LED lights with pre-glow and afterglow functions illuminate the work area more widely



BL MOTOR XPT



Capacity	Machine Screw: M4 - M8 (5/32" - 5/16") Standard Bolt: M5 - M16 (3/16" - 5/8") High Tensile Bolt: M5 - M14 (3/16" - 9/16") Coarse thread (in length): 22 - 125 mm (7/8" - 4-7/8")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	0 - 3,400
Impacts Per Minute (IPM)	0 - 3,600
Max Fastening Torque	170 N-m (1,500 in.lbs.)
Vibration Level	13.0 m/s ²
Sound Pressure Level	96 dB(A)
Sound Power Level	107 dB(A)
Dimensions (L x W x H)	126x79x238 mm (5"x3-1/8"x9-3/8")
Net weight	1.3 - 1.6 kg (2.8 - 3.5 lbs.)

DTD154Z

Cordless Impact Driver



18V LXT BL Brushless Cordless T-Mode 3-Speed 175 N-m (1,550 in.lbs.) Impact Driver

- ULTRA-COMPACT and ergonomic design at only 117 mm long
- Aluminium hammer case creates the impression of rigidity of the machine
- Dual LED lights with pre-glow and afterglow functions illuminate the work area more widely
- T-mode has an automatic electronic controller that downshifts and reduces rotation and impact speed prior to driving screw into place, and is engineered to minimize screw thread stripping, screw breakage and damage to work



BL MOTOR XPT



Capacity	Machine Screw: M4 - M8 (5/32" - 5/16") Standard Bolt: M5 - M16 (3/16" - 5/8") High Tensile Bolt: M5 - M14 (3/16" - 9/16") Coarse thread (in length): 22 - 125 mm (7/8" - 4-7/8")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	0 - 3,600 / 0 - 2,100 / 0 - 1,100
Impacts Per Minute (IPM)	0 - 3,800 / 0 - 2,600 / 0 - 1,100
Max Fastening Torque	175 N-m (1,550 in.lbs.)
Vibration Level	12.5 m/s ²
Sound Pressure Level	96 dB(A)
Sound Power Level	107 dB(A)
Dimensions (L x W x H)	117x79x236 mm (4-5/8"x3-1/8"x9-1/4")
Net weight	1.3 - 1.6 kg (2.7 - 3.4 lbs.)

DTD172ZJ

Cordless Impact Driver



- A compact and light impact wrench with a hex.
- 1/4" drive shank.
- A small and light tool that is easy to use but offers a max. fastening torque of 180 Nm, suitable for quick driving.
- A handy LED light for added lighting.



Capacity	Machine Screw: M4 - M8 (5/32" - 5/16")
	Standard Bolt: M5 - M16 (3/16" - 5/8")
	High Strength Bolt: M5 - M14 (3/16" - 9/16")
	Coarse Thread (in length): 22 - 125 mm (7/8" - 4-7/8")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	Max / Hard / Mid / Soft / Wood / Bolt / T (1) / T (2) mode: 0 - 3,600 / 3,200 / 2,100 / 1,100 / 1,800 / 3,600 / 2,900 /
3,600	
Impacts Per Minute (IPM)	Max / Hard / Mid / Soft / Wood / Bolt / T (2) mode: 0 - 3,800 / 3,600 / 2,600 / 1,100 / 3,800 / 3,800 / 2,600
Max Fastening Torque	180 N-m (1,590 in.lbs.)
Fastening Torque	Hard / Mid / Soft: 170 / 50 / 20 N-m (1,510 / 440 / 180 in.lbs.)
Vibration Level	Fastening Bolt: 13.5 m/s ²
Sound Pressure Level	97 dB(A)
Sound Power Level	108 dB(A)
Dimensions (L x W x H)	w/BL1830B / BL1850B / BL1860B: 114 x 81 x 236 mm (4-1/2 x 3-1/16 x 9-1/4")
Net weight	1.2 - 1.5 kg (2.6 - 3.3 lbs.)

DTS141ZJ

Cordless Oil-Pulse Driver



- Extra compact (136mm) and lightweight thanks to the newly-developed oil unit and BL motor
- Incredibly low noise operation thanks to the impact mechanism using oil unit instead of anvil and hammer
- "T" mode: Tightening mode for self-drilling screw and bolts
- With the cooling system for oil unit, capable of long continuous operation



Capacity	Machine Screw: M4 - M8 (5/32" - 5/16")
	Standard Bolt: M5 - M8 (3/16" - 5/16")
	High Tensile Bolt: M5 - M6 (3/16" - 1/4")
	Coarse thread (in length): 22 - 125 mm (7/8" - 4-7/8")
No Load Speed (RPM)	Hard: 0-2,200 / Medium: 0-2,000 / Soft: 0-1,200
Impacts Per Minute (IPM)	Hard: 0-2,700 / Medium: 0-2,200 / Soft: 0-1,400
Max Fastening Torque	40 N-m (355 in.lbs.)
Noise level	77 dB(A)
Dimensions (L x W x H)	136x79x240 mm (5-3/8"x3-1/8"x9-1/2")
Net weight	1.3 - 1.6 kg (2.8 - 3.5 lbs.)

DTL061ZJ

Cordless Angle Impact Driver



- Compact right angle impact driver for fastening and loosening in tight spaces
- Makita built motor and impact mechanism produces 60 N-m (530 in.lbs.) of maximum torque and 0-3,000 IPM
- Variable speed (0-2,000 RPM) for a range of applications from auto repair to cabinet installation
- Large conveniently located paddle switch for comfortable operation



Capacity	Machine Screw: M4 - M8 (5/32" - 5/16")
	Standard Bolt: M4 - M12 (5/32" - 1/2")
	High Tensile Bolt: M4 - M8 (5/32" - 5/16")
	Coarse thread (in length): 22 - 75 mm (7/8" - 2-31/32")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	0 - 2,000
Impacts Per Minute (IPM)	0 - 3,000
Max Fastening Torque	60 N-m (530 in.lbs.)
Dimensions (L x W x H)	387x78x116 mm (15-1/4"x3-1/16"x4-9/16")
Net weight	1.4 - 2.0 kg (3.1 - 4.3 lbs.)

DTL063ZJ

Cordless Angle Impact Wrench



- Compact right angle impact wrench for fastening and loosening in tight spaces
- Makita built motor and impact mechanism produces 60 N-m (531 in.lbs.) of maximum torque and 0-3,000 IPM
- Variable speed (0-2,000 RPM) for a range of applications from auto repair to product assembly
- Large conveniently located paddle switch for comfortable operation
- Over one foot of tool extension for extra reach into tight spaces



Fastening Capacities	Standard Bolt: M4 - M12 (5/32" - 1/2")
	High Strength Bolt: M4 - M8 (5/32" - 5/16")
Square Drive	9.5 mm (3/8")
No Load Speed (RPM)	0 - 2,000
Impacts Per Minute (IPM)	0 - 3,000
Max Fastening Torque	60 N-m
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 16.5 m/s ²
Sound Pressure Level	88 dB(A)
Sound Power Level	99 dB(A)
Dimensions (LxWxH)	387x78x116 mm (15-1/4"x3-1/16"x4-9/16")
Net weight	1.4 - 2.0 kg (3.1 - 4.3 lbs.)

DWR180Z

Cordless Ratchet Wrench



- Narrow head design for access to tight spaces
- High performance with up to 47.5Nm max fastening torque
- Paddle switch design with variable speed control



Capacity	Standard Bolt: M5 - M12 (3/16" - 1/2")
	High Strength Bolt:
	M5 - M10 (3/16" - 3/8")
Square Drive	9.5 / 6.35 mm (3/8" / 1/4")
No Load Speed (RPM)	0 - 800
Max Fastening Torque	47.5 N-m (420 in.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 369 x 79 x 87 mm (14-1/2 x 3-1/8 x 3-7/16")
Net weight	1.2 - 1.6 kg (2.6 - 3.5 lbs.)

DTW190ZK

Cordless Impact Wrench



- 190 N-m (140 ft.lbs.) of Max torque optimal for scaffold building
- Shoulder strap improves freedom of operator's movement during work at height
- 0-2,300 RPM & 0-3,000 IPM for a wide range of fastening applications
- Compact and ergonomic design at only 176 mm long
- Lightweight for reduced operator fatigue

* Tool does not come with socket



Fastening Capacities	Standard Bolt: M8 - M16 (5/16" - 5/8")
	High Tensile Bolt: M8 - M12 (5/16" - 1/2")
Square Drive	12.7 mm (1/2")
No Load Speed (RPM)	0 - 2,300
Impacts Per Minute (IPM)	0 - 3,000
Max Fastening Torque	190 N-m (140 ft.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 8.5 m/s ²
Sound Pressure Level	94 dB(A)
Sound Power Level	105 dB(A)
Overall Length	176 mm (6-15/16")
Net weight	1.4 - 1.8 kg (3.2 - 3.9 lbs.)

*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

* There is limited stock on some of the models. Please confirm availability.

DTW251ZK

Cordless Impact Wrench



18V LXT Li-Ion Cordless 1/2" (12.7 mm) 230 N-m (170 ft.lbs.) Impact Wrench

- High torque to weight ratio at 230 N-m (170 ft.lbs.)
- Makita built 4-pole motor design with dual steel ball bearings provides maximum torque
- Compact body provides more control and manoeuvrability
- High power, compact and lightweight 4-pole motor
- Electric brake for increased operator safety

* Tool does not come with socket



Fastening Capacities	Standard Bolt: M10 - M16 (3/8" - 5/8") High Tensile Bolt: M10 - M14 (3/8" - 9/16")
Square Drive	12.7 mm (1/2")
No Load Speed (RPM)	0 - 2,100
Impacts Per Minute (IPM)	0 - 3,200
Max Fastening Torque	230 N-m (170 ft.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 11.0 m/s²
Sound Pressure Level	94 dB(A)
Sound Power Level	105 dB(A)
Dimensions (L x W x H)	165x79x234 mm (6-1/2"x3-1/8"x9-1/4")
Net weight	1.5 - 1.8 kg (3.2 - 3.9 lbs.)

DTW300ZJ

Cordless Impact Wrench



18V LXT BL Cordless 1/2" (12.7 mm) 330 N-m (240 ft.lbs.) Impact Wrench, Forward/Reverse Rotation Auto Stop Mode

- Reverse Rotation Auto Stop Mode Stops after the bolt/nut is loosened enough
- BL motor delivers 330 N-m of max torque
- Single speed mode for reduced trigger-pulling force
- Socket can be fixed with ring spring



Fastening Capacities	Standard Bolt: M10 - M20 (3/8 - 3/4") High Strength Bolt: M10 - M16 (3/8 - 5/8")
Square Drive	12.7 mm (1/2")
No Load Speed (RPM)	0 - 3,200/0 - 2,600/0 - 1,800/0 - 1,000
Impacts Per Minute (IPM)	0 - 4,000/0 - 3,400/0 - 2,600/0 - 1,800
Max Fastening Torque	330 N-m (240 ft.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 144 x 81 x 246 mm (5-5/8 x 3-3/16 x 9-11/16")
Net weight	1.5 - 1.8 kg (3.4 - 4.1 lbs.)

DTW700ZJ

Cordless Impact Wrench



18V LXT Li-Ion BL Brushless Cordless 1/2" (12.7 mm) 700 N-m (520 ft.lbs.) Impact Wrench

- Delivers 700 N-m of torque for tough jobs
- Forward/Reverse Rotation Auto Stop Mode
- Compact and lightweight design provides superior balance and control
- Socket can be fixed with ring spring



Fastening Capacities	Standard Bolt: M10 - M24 (3/8 - 1") High Strength Bolt (Grade 10.9): M10 - M16 (3/8 - 5/8") High Strength Bolt (Grade F10T): M12, M16 (7/16, 5/8")
Square Drive	12.7 mm (1/2")
No Load Speed (RPM)	Max / Hard / Mid / Soft: 0 - 2,200 / 1,900 / 1,200 / 500
Impacts Per Minute (IPM)	Max / Hard / Mid / Soft: 0 - 2,700 / 2,400 / 1,700 / 1,000
Max Fastening Torque	700 N-m (520 ft.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 170 x 81 x 276 mm (6-11/16 x 3-3/16 x 10-7/8")
Net weight	2.3 - 2.7 kg (5.1 - 6.0 lbs.)

DTW1001ZJ

Cordless Impact Wrench



18V LXT BL Brushless Cordless 3-Speed 3/4" (19 mm) 1,050 N-m (780 ft.lbs.) Impact Wrench

- Makita's Most Powerful Impact Wrench
- Compact and lightweight design thanks to BL motor
- Extremely high power equivalent to AC model TW1000
- Overall length is extremely shortened
- Electronic 3 stage impact power selection reduces fault tightening

* Tool does not come with socket



Fastening Capacities	Standard Bolt: M12 - M30 (1/2" - 1-1/4") High Tensile Bolt: M10 - M24 (3/8" - 1")
Square Drive	19 mm (3/4")
No Load Speed (RPM)	Hard / Med / Soft: 0 - 1,800 / 0 - 1,000 / 0 - 900
Impacts Per Minute (IPM)	Hard / Med / Soft: 0 - 2,200 / 0 - 2,000 / 0 - 1,800
Max Fastening Torque	1,050 N-m (780 ft.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 15.5 m/s²
Sound Pressure Level	98 dB(A)
Sound Power Level	109 dB(A)
Dimensions (L x W x H)	229x91x289 mm (9"x3-5/8"x11-3/8")
Net weight	3.4 - 3.7 kg (7.5 - 8.2 lbs.)

DTW1002ZJ

Cordless Impact Wrench



18V LXT BL Brushless Cordless 3-Speed 1/2" (12.7 mm) 1,000 N-m (740 ft.lbs.) Impact Wrench

- Makita's most POWERFUL 1,000 N-m (740 ft.lbs.) 1/2" Impact Wrench / compact and lightweight design thanks to BL motor
- Extremely high power equivalent to AC model TW1000
- Overall length is extremely shortened
- Electronic 3 stage impact power selection reduces fault tightening
- Hammer case securely fastened with four bolts



Fastening Capacities	Standard Bolt: M12 - M30 (1/2" - 1-1/4") High Tensile Bolt: M10 - M24 (3/8" - 1")
Square Drive	12.7 mm (1/2")
No Load Speed (RPM)	Hard / Med / Soft: 0 - 1,800 / 0 - 1,000 / 0 - 900
Impacts Per Minute (IPM)	Hard / Med / Soft: 0 - 2,200 / 0 - 2,000 / 0 - 1,800
Max Fastening Torque	1,000 N-m (740 ft.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 18.0 m/s²
Sound Pressure Level	97 dB(A)
Sound Power Level	108 dB(A)
Dimensions (L x W x H)	229x91x289 mm (9"x3-5/8"x11-3/8")
Net weight	3.3 - 3.6 kg (7.3 - 8.0 lbs.)

DJV180ZK

Cordless Jig Saw



18V LXT Li-Ion Cordless Top Handle Jig Saw, 3 Orbital Settings Plus Straight Cutting, LED Light

- Low vibration and low noise
- Toolless push-in lock system enables extremely quick blade changes
- 3 orbital settings plus straight cutting with a powerful motor for use in a variety of materials
- Variable speed control dial (0 - 2,600 SPM) enables user to match the speed to the application for optimal cutting performance in a variety of materials



Capacity	Wood: 135 mm (5-5/16") Steel: 10 mm (3/8")
Length of Stroke	26 mm (1")
Strokes Per Minute (SPM)	0 - 2,600
Dimensions (L x W x H)	257x73x208 mm (10-1/8"x2-7/8"x8-3/16")
Net weight	2.7 - 3.0 kg (6.0 - 6.7 lbs.)

DJV181ZJ

Cordless Jig Saw



18V LXT BL Brushless Cordless Barrel Handle Jig Saw, 3 Orbital Settings Plus Straight Cutting, Dual LED Lights

- Barrel handle type cordless jig saw powered by Li-ion battery
- Powerful Brushless DC (BLDC) motor
- Excellent performance provides higher productivity
- Lightweight body with the equivalent weight to the AC model
- Electric brake for maximum productivity and increased operator safety


BL
MOTOR


Capacity	Wood: 135 mm (5-5/16")
	Steel: 10 mm (3/8")
Length of Stroke	26 mm (1")
Strokes Per Minute (SPM)	800 - 3,500
Dimensions (L x W x H)	298x77x189 mm (11-3/4"x3"x7-7/16")
Net weight	2.3 - 2.6 kg (5.0 - 5.7 lbs.)

DJV182ZK

Cordless Jig Saw



18V LXT BL Brushless Cordless Top Handle Jig Saw, 3 Orbital Settings Plus Straight Cutting, Dual LED Lights

- Top handle type cordless jig saw powered by Li-ion battery
- Powerful Brushless DC (BLDC) motor
- Excellent performance provides higher productivity
- Lightweight body with the equivalent weight to the AC model
- Trigger switch with lock-on button


BL
MOTOR


Capacity	Wood: 135 mm (5-5/16")
	Steel: 10 mm (3/8")
Length of Stroke	26 mm (1")
Strokes Per Minute (SPM)	800 - 3,500
Dimensions (L x W x H)	266x77x208 mm (10-1/2"x3"x8-3/16")
Net weight	2.4 - 2.7 kg (5.2 - 5.9 lbs.)

DPJ180ZJ

Cordless Plate Joiner



18V LXT Li-Ion Cordless Biscuit Joiner

- Provides up to 300 cuts or 150 joints on a single charge of BL1830
- Rack-and-pinion vertical fence system engineered for accurate fence adjustments
- Six depth settings with one-touch stops for #0, #10, and #20 and most common biscuits sizes


BL
MOTOR


Blade Diameter	100 mm (4")
Max cutting depth	20 mm (3/4")
No Load Speed (RPM)	6,500
Dimensions (L x W x H)	351x139x149 mm (13-3/4"x5-1/2"x5-7/8")
Net weight	2.8 - 3.1 kg (6.2 - 6.8 lbs.)

DTM50ZK

Cordless Multi Tool



18V LXT Li-Ion Cordless Multi Tool

- Compatible with all Bosch OIS (Oscillating Interface System) accessories
- Fully 360° multi angle setting enables users to position accessories in 12 different angles
- Ergonomically designed rubberised grip provides more control and comfort


BL
MOTOR


Oscillations Per Minute (OPM)	6,000-20,000
Dimensions (L x W x H)	307x80x122 mm (12-1/4"x3-1/8"x4-13/16")
Net weight	1.8 - 2.2 kg (3.9 - 4.8 lbs.)

DKP180Z

Cordless Planer



18V LXT Li-Ion Cordless 82 mm (3-1/4") Planer

- 2-Blade cutter head with double edge carbide blades for added performance and smooth finish
- Click depth adjustment knob with easy-to-read scale with settings from 0 mm (0") to 2 mm (5/64") for precise depth adjustment


BL
MOTOR


Planing Width	82 mm (3-1/4")
Planing Depth	2.0 mm (5/64")
Rebate	9mm
No Load Speed (RPM)	14,000
Dimensions (L x W x H)	333x157x160 mm
Net weight	3.2 - 3.5 kg (7.1 - 7.9 lbs.)

DKP181Z

Cordless Planer



18V LXT BL AWS ADT Cordless 82 mm (3-1/4") Planer

- BL Motor delivers high power
- Automatic torque Drive Technology (ADT) adjusts cutting speed and torque during cut for optimum performance
- Both side chip ejection
- Shiplapping: 25mm


LXT BL
MOTOR ADT


Planing Width	82 mm (3-1/4")
Planing Depth	3 mm (1/8")
Shiplapping	25 mm (1")
No Load Speed (RPM)	12,000
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 366 x 156 x 166 mm (14-3/8 x 6-1/8 x 6-1/2")
Net weight	3.3 - 3.6 kg (7.3 - 7.9 lbs.)

*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

* There is limited stock on some of the models. Please confirm availability.

DTR180ZJ

Cordless Rebar Tying Tool



18V LXT BL Brushless Cordless Rebar Tying Tool

- Tying rebars can be done automatically in a various range of applications such as building concrete foundations
- Operable by only one hand, allowing the other hand to be free to adjust the position of rebar
- Users can tie rebars by only pulling contact arm against rebars if they continuously hold the trigger



Tie Wire	Dia.: 0.8 mm
Applicable Rebars	D10 x D10 - (D13 x 2) x (D13 x 2)
Vibration Level	2.5 m/s ² or less
Sound Pressure Level	78 dB(A)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 304x93x318 mm (12"x3-2/3"x12-1/2")
Net weight	2.3 - 2.6 kg (5.1 - 5.7 lbs.)

DSC163ZK

Cordless Steel Rod Cutter



18V LXT Li-Ion Brushless Cordless 16 mm (5/8") Steel Rod Cutter

- Quick and effortless rebar cutting for maximum job-site productivity and safety
- Up to 270 cuts of 16 mm rebar with a 6.0Ah LXT battery
- Cutting capacity range of 3 - 16 mm standard rebar
- 4-Way rotatable cutting blade provides up to 4,000 cuts before needing to be replaced



Cutting Capacity	Dia.: 3 - 16 mm (1/8" - 5/8")
Cutting Speed (sec)	2.8
Dimensions (L x W x H)	360x108x276 mm
Net weight	6.9 kg

*Not compatible with 1.5Ah

DSC121ZK

Cordless Threaded Rod Cutter



18V LXT Li-Ion Brushless Cordless 16 mm (5/8") Threaded Rod Cutter

- High cutting power and speed by installing BL motor
- Cuts M12 steel threaded rod in 3 seconds- BL motor with high power to weight and size ratio
- BL motor eliminates carbon brushes, enabling the BL motor to run cooler and more efficiently for longer life



Capacity	Steel: 8 - 12 mm (5/16" - 1/2")
Cutting Speed (sec)	3.0
Vibration Level	2.5 m/s ² or less
Sound Pressure Level	85 dB(A)
Sound Power Level	96 dB(A)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 212x323x260 mm (8-3/8"x12-3/4"x10-1/4")
Net weight	6.0 kg (13.2 lbs.)

DJR183Z

Cordless Recipro Saw



18V LXT Li-Ion Cordless Compact Recipro Saw

- Variable speed (0 - 3,000 SPM) combined with a 13 mm (1/2") stroke length for faster and more efficient cutting
- Dual-position on/o switch allows for either paddle or trigger switch operation
- Toolless blade change system allows for faster blade installation and removal
- Compact design at 392 mm (15-1/2") long; lightweight for convenient operation



Capacity	Pipe: 50 mm (2") Wood: 50 mm (2")
Length of Stroke	13 mm (1/2")
Vibration Level	Cutting Boards: 8.0 m/s ² Cutting Wooden Beams: 7.0 m/s ²
Strokes Per Minute (SPM)	0-3,000
Sound Pressure Level	77 dB(A)
Dimensions (L x W x H)	392x81x209 mm (15-1/2"x3-3/16"x8-1/4")
Net weight	1.5 - 1.7 kg (3.3 - 3.8 lbs.)

DJR186ZK

Cordless Recipro Saw



18V LXT Li-Ion Cordless Recipro Saw

- Newly designed vertical crank mechanism minimizes blade deflection and reduces vibration to machine
- Higher cutting speed (Max 2,800 SPM) and modified stroke length (32 mm) provide higher cutting efficiency
- Higher durability thanks to more durable mechanism to hold slider and more rigid shoe
- Toolless blade change; Redesign of blade clamp makes it easier to remove a blade



Length of Stroke	32 mm (1-1/4")
Strokes Per Minute (SPM)	0 - 2,800
Capacity	Pipe: 130 mm (5-1/8") Wood: 255 mm (10")
Vibration Level	Cutting Boards: 13.0 m/s ² Cutting Wooden Beams: 12.5 m/s ²
Sound Pressure Level	84 dB(A)
Sound Power Level	95 dB(A)
Dimensions (L x W x H)	486x81x223 mm (19-1/8"x3-1/16"x8-3/4")
Net weight	3.5 - 3.8 kg (7.6 - 8.3 lbs.)

DJR187ZK

Cordless Recipro Saw



18V LXT BL Brushless Cordless Recipro Saw

- Higher cutting speed (Max 3,000 SPM) and modified stroke length (32 mm) provide higher cutting efficiency
- Newly designed vertical crank mechanism minimizes blade deflection and reduces vibration to machine
- Higher durability thanks to more durable mechanism to hold slider and more rigid shoe
- BL Brushless DC motor eliminates carbon brushes, enabling the BL motor to run cooler and more efficiently for longer life
- BL Brushless DC motor with high power to weight and size ratio



Length of Stroke	32 mm (1-1/4")
Strokes Per Minute (SPM)	High / Low: 0 - 3,000 / 0 - 2,300
Capacity	Pipe: 130 mm (5-1/8") Wood: 255 mm (10")
Vibration Level	Cutting Boards: 16.5 m/s ² Cutting Wooden Beams: 15.5 m/s ²
Sound Pressure Level	84 dB(A)
Sound Power Level	95 dB(A)
Dimensions (L x W x H)	439x83x231 mm (17-1/4"x3-1/4"x9-1/8")
Net weight	3.4 - 3.8 kg (7.6 - 8.3 lbs.)

DHR202ZK

Cordless Rotary Hammer



18V LXT Li-Ion Cordless 20 mm (13/16") Rotary Hammer, SDS-PLUS Bits

- Makita-built motor delivers 0-1,100 RPM and 0-4,000 BPM for 2X faster drilling
- Synchronized RPM and BPM prevents overlapping impacts for up to 50% more efficient drilling
- 3-Mode operation; "rotation only", "hammering with rotation" and "hammering only"
- 40 different chisel positions for increased comfort and performance



18V



Impact Energy	2 J
Capacity	Concrete: 20 mm (13/16")
	Steel: 13 mm (1/2")
	Wood: 26 mm (1")
Blows Per Minute (BPM)	0 - 4,000
No Load Speed (RPM)	0 - 1,100
Dimensions (L x W x H)	358x84x259 mm (14-1/8"x3-5/16"x10-1/4")
Net weight	3.2 - 4 kg (7.1 - 8.8 lbs.)

DHR242ZJ

Cordless combination Hammer



18V LXT BL Brushless Cordless 24 mm (15/16") Combination Hammer, SDS-PLUS Bits

- Lightweight, 3-Mode Rotary Hammer
- BL motor delivers 0-950 RPM and 0-4,700 BPM
- BL motor with high power to weight and size ratio
- BL motor generates less heat build-up and is ideal for prolonged use in high production applications
- BL motor is electronically controlled to optimize battery energy use for up to 50% longer run time per charge



BL MOTOR XPT



Impact Energy	2 J
Capacity	Concrete: 24 mm (15/16")
	Steel: 13 mm (1/2")
	Wood: 27 mm (1-1/16")
Blows Per Minute (BPM)	0 - 4,700
No Load Speed (RPM)	0 - 950
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Vibration Level	Hammer Drilling into Concrete: 13.5 m/s ²
Dimensions (L x W x H)	328x85x213 mm
Net weight	3.1 - 3.8 kg (6.7 - 8.4 lbs.)

DBS180Z

Cordless Belt Sander



18V LXT BL Brushless Cordless Variable Speed Belt Sander

- Electric Brake
- Adjustable sanding arm pivots up to 160° for compact storage
- Anti start-up during storage - will not start if the sanding arm is folded over 90°
- Lock-on function



BL MOTOR LXT



Belt Width	6 / 9 / 13 mm (1/4 / 3/8 / 1/2")
Belt Length	533 mm (21")
Belt Speed	600 - 1,700 m/min
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 500 x 96 x 116 mm (19-3/4 x 3-3/4 x 4-9/16")
	w/ Side Grip & BL1830B / BL1840B / BL1850B / BL1860B: 500 x 245 x 126 mm (19-3/4 x 9-5/8 x 5")
Net weight	1.8 - 2.1 kg (4.0 - 4.6 lbs.)

Standard 9mm (6 and 13mm available as optional accessory)

DBO180Z

Cordless Random Orbit Sander



18V LXT Li-Ion Cordless 125 mm (5") 3-Speed Random Orbit Sander with Built-In Dust Extraction System

- Three speed settings (7,000/9,500/11,000 OPM) engineered for faster material removal
- Up to 40 minutes (low speed) and 20 minutes (high speed) of run time on a single charge
- Large 2.8 mm (1/8") random orbit action engineered for fast sanding and swirl-free finish
- One-touch electronic speed control switch provides fast, medium and low settings
- Ergonomically designed body and grip for increased operator comfort



BL MOTOR



Pad diameter	123 mm (4-7/8")
Abrasive Disc Size	125 mm (5")
Orbits Per Minute (OPM)	7,000/ 9,500/ 11,000
Dimensions (L x W x H)	175x123x153 mm (6-7/8"x4-7/8"x6")
Net weight	1.4 - 1.7 kg (3 - 3.7 lbs.)

DFS250ZJ

Cordless Screwdriver



18V LXT BL Brushless Cordless 0-2,500 RPM High Torque Push Drive Technology Screwdriver with LED Light, Silent Clutch

- High torque ideal for decking applications
- Push Drive Technology - in lock-on mode the motor starts only when the fastener is engaged for a quieter work environment and to save battery power
- Ultra-high efficiency comparable to AC screwdrivers
- BL motor eliminates carbon brushes, enabling the BL motor to run cooler and more efficiently for longer life
- BL motor is electronically controlled to optimize battery energy use for up to 50% longer run time per charge



BL MOTOR



Capacity	Coarse Thread: 4.5 x 90 mm (3/16" x 3-1/2")
	Self-Drilling Screw: 6 mm (1/4")
	Drywall Screw: 5 mm (3/16")
Driving Shank (Hex)	6.35 mm (1/4")
No Load Speed (RPM)	0 - 2,500
Vibration Level	Screwdriving w/o Impact: 2.5 m/s ² or less
Sound Pressure Level	72 dB(A)
Dimensions (L x W x H)	259x79x259 mm (10-1/4"x3-1/8"x10-1/4")
Net weight	1.5 - 1.9 kg (3.4 - 4.1 lbs.)

DFS251ZJ

Cordless Screwdriver



18V LXT BL Brushless Cordless 0-2,500 RPM High Torque Push Drive Technology Screwdriver with LED Light

- High torque ideal for fastening self-drilling screw
- Push Drive Technology - in lock-on mode the motor starts only when the fastener is engaged for a quieter work environment and to save battery power
- Ultra-high efficiency comparable to AC screwdrivers
- BL motor eliminates carbon brushes, enabling the BL motor to run cooler and more efficiently for longer life



BL MOTOR



Capacity	Self-Drilling Screw: 6 mm (1/4")
	Drywall Screw: 5 mm (3/16")
	Hex Socket Screw: 6 mm (1/4")
Driving Shank (Hex)	6.35 mm (1/4")
No Load Speed (RPM)	0 - 2,500
Vibration Level	Screwdriving w/o Impact: 2.5 m/s ² or less
Sound Pressure Level	72 dB(A)
Dimensions (L x W x H)	237x79x259 mm (9-3/8"x3-1/8"x11-1/4")
Net weight	1.5 - 1.8 kg (3.2 - 3.9 lbs.)

*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

*There is limited stock on some of the models. Please confirm availability.

DFS452ZJ

Cordless Screwdriver



18V LXT BL Brushless Cordless 0-4,000 RPM Push Drive Technology Screwdriver, LED Light, Silent Clutch

- Push Drive Technology for Quieter Operation; Minimizes Power Consumption
- Push Drive Technology - in lock-on mode the motor starts only when the fastener is engaged for a quieter work environment and to save battery power
- Ultra-high efficiency comparable to AC screwdrivers
- BL motor delivers 0-4,000 RPM to handle a variety of drywall and framing applications



Capacity	Self-Drilling Screw: 6 mm (1/4") Drywall Screw: 5 mm (3/16")
Driving Shank (Hex)	6.35 mm (1/4")
No Load Speed (RPM)	0 - 4,000
Vibration Level	Screwdriving w/o Impact: 2.5 m/s ² or less
Sound Pressure Level	72 dB(A)
Dimensions (L x W x H)	251x79x259 mm (10"x3-1/8"x1-1/4")
Net weight	1.5 - 1.8 kg (3.2 - 3.9 lbs.)

DFR550ZJ

Cordless Auto Feed Screwdriver



18V LXT Li-Ion Cordless 4,000 RPM Auto Feed Screwdriver with Silent Clutch

- Ideal for drywall and sub-floors
- Delivers superior fastening speed with 4,000 RPM for decking and sub-floor applications
- Integrated auto-feed design makes the tool lighter, more powerful and compact
- Rugged aluminium dust-proof auto-feed housing provides smooth sliding action



Screw Strip	4 x 25 - 55 mm (5/32" x 1" - 2-3/16")
Driving Shank (Hex)	6.35 mm (1/4")
No Load Speed (RPM)	4,000
Vibration Level	Screwdriving w/o Impact: 2.5 m/s ² or less
Sound Pressure Level	78 dB(A)
Dimensions (L x W x H)	424x80x238 mm (16-3/4"x3-1/8"x9-3/8")
Net weight	2.1 - 3.1 kg (4.6 - 6.9 lbs.)

DGP180Z

Cordless Grease Gun



18V LXT Li-Ion Cordless Grease Gun

- Practical grease gun which is ideal for lubrication applications for workshops, agriculture and heavy machinery.
- Capacity is 475 ml and the tool provides pressure of 69 Mpa.
- Light weight and compact in size.



Max Operating Pressure	69 MPa (10,000 PSI)
Flow Rate	Slow Speed Mode: 145 mL/min (5.0 oz/min) Auto Speed Change Mode : 290 mL/min (10.0 oz/min)
Grease Capacity: Barrel A	Cartridge / Bulk: 410 / 455 g (14.5 / 16.0 oz)
Barrel B	Cartridge / Bulk: 450 / 570 g (15.9 / 20.1 oz)
Barrel C	Cartridge / Bulk: 500 / 570 g (17.6 / 20.1 oz)
Hose Length	120 cm (47-1/4")
Dimensions (L x W x H)	w/ Barrel B 449 x 114 x 245 mm (17-3/4 x 4-1/2 x 9-5/8")
Net weight	4.8 - 6.1 kg (10.6 - 13.4 lbs.)

DJN161Z

Cordless Nibbler



18V LXT Li-Ion Cordless 1.6 mm (16 Ga) Nibbler

- Makita-built motor delivers 1,900 SPM for faster and smooth cutting
- Ideal for cutting roofing sheet metal at thickness's up to 16 gauge
- Die holder rotates 360° to meet demands of cutting direction
- Convenient chip disposal is below cutting material to minimize damage to cutting surface
- Cutting radius: inner edge 45 mm (1-3/4"); outer 50 mm (2")



Capacity	Steel up to 400 N/mm ² : 1.6 mm Steel up to 600 N/mm ² : 1.2 mm Aluminium up to 200 N/mm ² : 2.5 mm
Min. Cutting radius	Inside edge: 45 mm (1-3/4") Outside edge: 50 mm (2")
Strokes Per Minute (SPM)	1,900
Dimensions (L x W x H)	313x78x189 mm (12-3/8"x3-1/16"x7-7/16")
Net weight	1.9 - 2.3 kg (4.3 - 5 lbs.)

DJS101ZJ

Cordless Metal Shear



18V LXT Li-Ion Cordless 1.0mm Metal Shear

- Easy curve cutting
- Straight design provides more control and high manoeuvrability for easy cutting operation
- Minimum outside cutting radius of 30mm for close right or left curve cuts with a smooth edge
- Anti-restart function with warning lamp
- Warning lamp for low battery capacity



Capacity	Steel up to 400 N/mm ² : 1.0 mm Steel up to 600 N/mm ² : 0.7 mm Aluminium up to 200 N/mm ² : 2.5 mm
Strokes Per Minute (SPM)	4,300
Dimensions (L x W x H)	364 x 78 x 118 mm (14-3/8 x 3-1/16 x 4-5/8")
Net weight	1.8 - 2.2 kg (4.0 - 4.7 lbs.)

DJS161ZJ

Cordless Straight Shear



18V LXT Li-Ion Cordless 1.6 mm Straight Shear

- Straight design provides more control and high manoeuvrability for easy cutting operation
- Compact and lightweight design for easy handling and high manoeuvrability
- High cutting capacity: cuts up to 1.6 mm thick mild steel sheet
- Anti-restart function with warning lamp for safety



Capacity	Steel up to 400 N/mm ² : 1.6 mm Steel up to 600 N/mm ² : 1.2 mm Aluminium up to 200 N/mm ² : 2.5 mm
Strokes Per Minute (SPM)	4,300
Dimensions (L x W x H)	362x78x118 mm (14-1/4"x3-1/16"x4-5/8")
Net weight	1.8 - 2.2 kg (4.1 - 4.8 lbs.)

DRV250ZJ

Cordless Rivet Gun



18V LXT BL Brushless Cordless Rivet Gun

- Jaw case designed to enable tight space operation
- The short centre height allows for tight space operation such as close-to-wall riveting
- Compatible with various sizes of blind rivets
- A wide range of nose pieces and jaw pushers allow for tightening various sizes of blind rivets
- Compatible rivet diameter: 2.4 - 6.4mm


BL MOTOR LXT XPT


Pulling Force	20 kN (4,500 lbs.)
Stroke	30 mm (1-3/16")
Rivet Diameter Range	2.4 - 6.4 mm (3/32" - 1/4")
Vibration Level	Installing Blind Rivet: 2.5 m/s ² or less
Sound Pressure Level	74 dB(A)
Dimensions (L x W x H)	w/ BL1815N 323x80x270 mm (12-3/4"x3-1/8"x10-5/8") w/ BL1830B / BL1840B / BL1850B / BL1860B: 323x80x287 mm (12-3/4"x3-1/8"x11-1/4")
Net weight	2.1 - 2.4 kg (4.6 - 5.3 lbs.)


DPT353Z

Cordless Pin Nailer



18V LXT Li-Ion Cordless 23 Ga 35 mm (1-3/8") Pin Nailer

- Low Reaction Force Mechanism Enables Easier Long Pin Nailing and High-Quality Finish
- Easy-to-see slim nose tip allows quick and easy access to a desired fastening point
- Nails can be fired in the groove of baseboard
- Shoots 6,400 nails on a single full BL1860B charge
- Contact arm mechanism enables "continuous nailing" and "drag nailing"



Capacity	Length: 15, 18, 25, 30, 35 mm (5/8", 11/16", 1", 1-3/16", 1-3/8") Dia.: 0.6 mm (1/32") Gauge: 23 Ga
Magazine Capacity	120
Vibration Level	2.5 m/s ² or less
Sound Pressure Level	76 dB(A)
Dimensions (L x W x H)	257x79x226 mm (10-1/8"x3-1/8"x8-7/8")
Net weight	2.0 - 2.3 kg (4.4 - 5.1 lbs.)

DST221Z

Cordless Stapler



18V LXT Li-Ion Cordless 10 mm (3/8") Stapler

- A convenient window on magazine shows the number of remaining staples
- Spring-loaded driving mechanism allows for a more compact tool with less weight
- Rugged machined aluminium magazine ensures smooth loading and feeding of staples



Staple	Width: 10 mm (3/8") Length: 10, 13, 16, 19, 22 mm (3/8", 1/2", 5/8", 3/4", 7/8") Gauge: 0.6 x 1.2 mm (1/32" x 1/16")
Magazine Capacity	98
Vibration Level	3.5 m/s ²
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions (L x W x H)	251x91x212 mm (9-7/8"x3-5/8"x8-3/8")
Net weight	2.1 - 2.4 kg (4.7 - 5.3 lbs.)

DRT50ZJ

Cordless Trimmer



18V LXT BL Brushless Cordless 6 mm (1/4"), 8 mm (3/8") Variable Speed Trimmer with Dual LED Lights

- Up to 10% Faster Trimming than Corded Model RT0700C
- BL motor delivers the power and performance for corded demands
- Aluminium base for higher durability and accuracy
- Plastic cover plate protects workpiece from scratches



Collet Capacity	6 mm, 8 mm or 1/4", 3/8"
No Load Speed (RPM)	10,000 - 30,000
Plunge Capacity	w/ Trimmer Base: 0 - 40 mm (0" - 1-9/16") w/ Plunge Base: 0 - 35 mm (0" - 1-3/8")
Vibration Level	Rotation w/o Load: 2.5 m/s ² or less Cutting Grooves in MDF: 4.5 m/s ²
Sound Pressure Level	78 dB(A)
Dimensions (L x W x H)	w/ BL1815N 134x89x208 mm w/BL1830B / BL1840B / BL1850B/ BL1860B: 134x89x226 mm
Net weight	1.8m - 2.1 kg (3.9 - 4.6 lbs.)

DRT50ZJX2

Cordless Trimmer Kit



18V LXT BL Brushless Cordless 6 mm (1/4"), 8 mm (3/8") Variable Speed Trimmer Kit

- Up to 10% Faster Trimming than Corded Model RT0700C
- BL motor delivers the power and performance for corded demands
- Cordless for easy manoeuvrability: Aluminium base for higher durability and accuracy
- Plastic cover plate protects workpiece from scratches



Collet Capacity	6 mm, 8 mm or 1/4", 3/8"
No Load Speed (RPM)	10,000 - 30,000
Plunge Capacity	w/ Trimmer Base: 0 - 40 mm (0" - 1-9/16") w/ Plunge Base: 0 - 35 mm (0" - 1-3/8")
Vibration Level	Rotation w/o Load: 2.5 m/s ² or less Cutting Grooves in MDF: 4.5 m/s ²
Sound Pressure Level	78 dB(A)
Dimensions (L x W x H)	w/ BL1815N 134x89x208 mm w/BL1830B / BL1840B / BL1850B/ BL1860B: 134x89x226 mm
Net weight	1.8m - 2.1 kg (3.9 - 4.6 lbs.)

DVP180Z

Cordless Vacuum Pump



18V LXT Li-Ion Cordless Vacuum Pump

- Cordless vacuum pump for air purge during installation of room air conditioner
- Removes all air from refrigerant tubing to create a vacuum environment before the tubing is charged with refrigerant gas
- Compression type: Oil rotary type (vane type), Single stage



Flow rate	50 L/min
Ultimate vacuum	20 Pa (150 microns)
Motor speed	3,840 min ⁻¹
Oil Tank Capacity	115 mL
Inlet port	5/16"
Dimensions (L x W x H)	265x93x175 mm (10-3/8"x3-5/8"x6-7/8")
Net weight	3.5 kg

Not compatible with 1.5Ah batteries

*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

*There is limited stock on some of the models. Please confirm availability.

DUT131Z

Cordless Mixer



18V LXT BL Brushless Variable 2-Speed Mixer with Keyed Chuck

- Uses keyed drill chuck to hold the mixing blade
- Variable speed transmission for a wide range of applications

Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
No Load Speed (RPM)	High / Low: 0 - 1,300 / 0 - 350
Vibration Level	Operation w/o Load: 2.5 m/s ² or less
Dimensions (L x W x H)	307 x 89 x 231 mm (12-1/8 x 3-1/2 x 9-1/8")
Net weight	2.7 - 3.0 kg (5.8 - 6.6 lbs.)



CORDLESS ACCESSORIES

ADP05

Cordless Adapter for USB



18V LXT Li-Ion Cordless Adapter for USB

- Charges or supplies power to smart phones, tablets etc.
- 2 USB output ports with caps.

USB Port	2 (A type)
Dimensions	102 x 72 x 43mm
Net Weight	0.71kg



18V

*Battery cable and smart phone not included


DCF102Z

Cordless Fan



18V LXT Li-Ion Cordless 180 mm (7-1/8") Automatic Swing Fan

- Automatically Swings 45° L/R. Compact size allows installation even in small spaces
- 3-stage automatic timer with 1, 2, and 4 hour power-on selection
- Up to 21.2 hours of continuous runtime on low speed with a 18V 6.0Ah LXT battery (battery not included)



Continuous Use (min.)	w/ BL1860B Low / Med / High:
	1,270 / 705 / 575
	w/ BL1815N Low / Med / High:
	295 / 165 / 135
Air Flow	High / Med / Low:
	4.6 / 3.8 / 3.0 L/min
Dimensions (L x W x H)	185x272x284 mm (7-1/4"x10-3/10"x11-1/8")
Net weight	1.3 - 2.0 kg (2.9 - 4.4 lbs.)

DMP180Z

Cordless Inflator



18V LXT Li-Ion Cordless Inflator



Max Air Pressure	830 kPa (121 PSI) [8.3 bar]
Air Discharge Amount	200 kPa: 12 L/min
	700 kPa: 8 L/min
	830 kPa: 7 L/min
Hose Length	65 cm (25-1/2")
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B:
	266 x 80 x 174 mm (10-1/2 x 3-1/8 x 6-7/8")
Net weight	1.4 - 1.7 kg (3.1 - 3.8 lbs.)


DML815

Cordless LED Flashlight



18V LXT Li-Ion Flashlight, 160 Lumens

- Rubberised soft grip of ergonomic design.
- 4 Position pivoting head with positive stops at 0, 45, 90, 110°.
- Replacement xenon bulb stored in the head case.
- With over-discharge protection circuit.
- Falling impact strength of 1m enough to protect the bulb.



Run Time (hrs)	Up to: 4.3 with a 3.0Ah battery
Overall Length	284mm
Net Weight	0.74kg

DML802

18V LXT Li-Ion LED Rechargeable Flashlight, 180 Lumens

Cordless Rechargeable Flashlight

· High luminance 3.2W single LED.



18V


Current	0.6A
Continuous Use (hours)	6 (1.5Ah)
	13 (3.0Ah)
Net Weight	0.65kg

DML801

18V LXT Li-Ion 12 LED Worklight, 240 Lumens

Cordless LED Worklight

· Fluorescent light / Flashlight
· Rotatable and foldable light head enables you to use this product as a compact stationary flashlight.



18V


Current	0.6A
Continuous Use (hours)	4 (1.5Ah)
	9 (3.0Ah)
Net Weight	0.68kg

DML807

18V LXT Li-Ion 21 LED Worklight, 710 Lumens

Cordless LED Worklight

· Versatile work light providing ultra-bright illumination and convenience.
· Built-in USB port for charging portable electronic devices.



XPT 18V

Run Time (hrs)	Up to: 43
Main Light	Luminous ux (Full brightness): 710lm
(on bar side)	Illuminance (Full brightness): 340 lx
Sub Light	Luminous: 130 lm
(on top side)	Illuminance: 1,900 lx
Net Weight	0.72kg

DCM501ZR

18V LXT Li-Ion Cordless Coffee Maker

Cordless Coffee Maker



LXT 18V

Water Tank Capacity	240 mL
Compatible Cafe Pod	60 mm
Type	
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B : 243 x 187 x 218 mm (9-9/16 x 7-3/8 x 8-9/16")
Net weight	1.9 - 2.2 kg (4.1 - 4.8 lbs.)



*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

* There is limited stock on some of the models. Please confirm availability.

DUB185Z

18V LXT Li-Ion Cordless Variable 3-Speed Blower

Cordless Blower



- Variable speed (0-18,000 RPM) for optimum speed control
- Compact and ergonomic design at only 280 mm long
- Lightweight for reduced operator fatigue
- Rubberised soft grip handle for increased operator comfort



Air Pressure	5.8 kPa (550 mmHO)
No Load Speed (RPM)	0-18,000
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Vibration Level	2.5 m/s ²
Dimensions (L x W x H)	525x155x212 mm (20-3/4"x6-1/8"x8-3/8")
Net weight	1.6 kg (3.7 lbs.)

DUB186Z

18V LXT Li-Ion Cordless Variable Speed Blower

Cordless Blower



- Long blowing nozzle with curved tip for optimal blowing performance
- 3 Air volume setting (high/medium/low)
- Variable speed (0-18,000 RPM) for optimum speed control
- Ergonomically designed handle with rubberised soft grip
- Optimum grip-to-frame angle



Air volume	3.2m ³ /min
Air speed	68 m/s
No Load Speed (RPM)	0-18,000
Sound Pressure Level	82.5 dB(A)
Sound Power Level	92.4 dB(A)
Vibration Level	2.5 m/s ²
Overall Length	861mm
Net weight	1.6 - 2.1 kg

*Cannot be used as vacuum cleaner

DUB184Z

18V LXT BL Brushless Cordless Variable Speed Blower

Cordless Blower



- Ideal for clearing fallen leaves on pavement, grass and hedge clippings or other light debris
- Efficient clearing thanks to a high-efficiency axial fan similar to that of 18Vx2 LXT model DUB36Z
- Variable speed control by trigger, with cruise control lever for lock-on operation
- BL motor delivers up to 52.1 m/s and 13.0 m³/min
- Compact and lightweight for single handed operation



Max Air Volume	13.0 m ³ /min (459 CFM)
Max Air Velocity	52.1 m/s (116 MPH)
No Load Speed (RPM)	0 - 18,000
Blowing Force	10.9 N
Sound Pressure Level	86.6 dB(A)
Sound Power Level	93.5 dB(A)
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 825x160x285 mm (32-1/2"x6-5/16"x11-1/4")
Net weight	2.5 - 3.0 kg (5.4 - 6.7 lbs.)

DUC122Z

18V LXT Li-Ion Cordless 115 mm (4-1/2") Chain Saw

Cordless Chain Saw



- The perfect chain saw for trimming, powered by 18V LXT
- Makita-built motor delivers 5.0 m/s (300 m/min) (980 FPM) for increased cutting speed
- 115 mm (4-1/2") guide bar is ideal for climbing
- "Tool-less" chain adjustments for convenient operation and maintenance
- Low noise level and zero emissions for operator comfort



Guide Bar Length	115 mm (4-1/2")
Chain Pitch	1/4"
Chain Gauge	1.3 mm (0.05")
Chain Speed	5.0 m/s (300 m/min) (980 FPM)
Chain Oil Tank Volume	80 mL (2.7 US oz)
Sound Pressure Level	84.6 dB(A)
Sound Power Level	92.7 dB(A)
Vibration Level	Cutting Wood: 4.3 m/s ²
Dimensions (L x W x H)	422x195x215 mm (16-5/8"x7-5/8"x8-1/2")
Net weight	2.6 kg (5.7 lbs.)

DUC254Z

18V LXT BL Brushless Cordless Chain Saw, 250mm, Variable Speed, Brake, Soft Start

Cordless Chain Saw



Efficiency equivalent to 23mL class engine chain saw.



Guide Bar Length	250 mm
Chain Pitch / Chain Gauge	3/8" / 1.1 mm 3/8" / 1.3 mm
Chain Speed	0 - 24 m/s (0 - 1,440 m/min)
Chain Oil Tank Volume	140 mL
Sound Pressure Level	92.2 dB(A)
Sound Power Level	103.2 dB(A)
Vibration Level	Cutting Wood: 3.1 m/s ²
w/o Guide Bar :	w/o Guide Bar :
	258x184x191 mm
Dimensions (L x W x H)	w/ 25 cm (10") 90PX Sprocket Nose Bar: 482x184x191 mm
Net Weight	2.8 - 3.2 kg

DJR183Z

18V LXT Li-Ion Cordless Compact Recipro Saw

Cordless Recipro Saw



- Variable speed (0 - 3,000 SPM) combined with a 13 mm (1/2") stroke length for faster and more efficient cutting
- Dual-position on/o switch allows for either paddle or trigger switch operation
- Toolless blade change system allows for faster blade installation and removal
- Compact design at 392 mm (15-1/2") long; lightweight for convenient operation
- Built-in LED light illuminates the work area



Capacity	Pipe: 50 mm (2") Wood: 50 mm (2")
Length of Stroke	13 mm (1/2")
Vibration Level	Cutting Boards: 8.0 m/s ² Cutting Wooden Beams: 7.0 m/s ²
Strokes Per Minute (SPM)	0-3,000
Sound Pressure Level	77 dB(A)
Dimensions (L x W x H)	392x81x209 mm (15-1/2"x3-3/16"x8-1/4")
Net weight	1.5 - 1.7 kg (3.3 - 3.8 lbs.)


DUR193Z

Cordless Grass Trimmer



18V LXT Li-Ion Cordless Grass Trimmer, Loop Handle

- A compact and handy line trimmer for trimming and finishing of gardens and other green spaces.
- This tool, with a cutting width of 260 mm, has a balanced shaft design for added user convenience.
- Equipped with an adjustable telescopic shaft.



Cutting Width	Nylon Cutting Head: 260mm (10-1/4")
No Load Speed (RPM)	7,800
Sound Pressure Level	73,2 dB(A)
Sound Power Level	83,1 dB(A)
Vibration Level	Left/Right: 2.5/ 2.5 m/s ² or less
Dimensions (L x W x H)	1248 - 1436 x 265 mm
Maximum Run Time(min)	w/BL1830B:45
Net Weight	2.3-2.6 kg (5.1-5.7 lbs.)

DUR190LZX3

Cordless Grass Trimmer



- Better maneuverability due to lightweight design and the same powerful cutting performance as the current DUR187U series
- One protector for metal blade / plastic blade / trimmer head
- Toolless shaft lock for plastic blade change
- The guard integrated with receive washer minimizes weed winding
- Soft grip of ergonomic design



Cutting Width	Nylon Cutting Head: 300 mm (11-3/4")
	Metal Blade: 230 mm (9")
	Plastic Blade: 255 mm (10")
No Load Speed (RPM)	3,500 - 6,000
Spindle Size	M10 x 1.25 LH
Dimensions (L x W x H)	1,836 x 348 x 236 mm (72-1/4 x 13-3/4 x 9-1/4")
Net weight	2.9 - 3.2 kg (6.4 - 7.1 lbs.)

DUR192L

Cordless Grass Trimmer



18V LXT BL Brushless Cordless 2-Speed Grass Trimmer, Loop Handle

- 2-Speed options (Low: 4,500 RPM, High: 6,000 RPM) allows the operator to match speed to application
- Direct-drive motor mounted directly on the trimmer head for increased efficiency and improved tool balance



Cutting Width	Trimmer Head: 300 mm
No Load Speed (RPM)	High / Low: 6,000 / 4,500
Spindle Size	M10 x 1.25 LH
Sound Pressure Level	74.8 dB(A)
Sound Power Level	87.8 dB(A)
Vibration Level	2.5 m/s ²
Overall Length	1,670mm
Net weight	3 kg with battery

*Standard with nylon cutting head

DUH523Z

Cordless Hedge Trimmer



18V LXT Li-Ion Cordless Hedge Trimmer

- Delivers 2,700 SPM for increased cutting speed
- 52 cm (20-1/2") blade provides increased cutting capacity
- Improved soft grip design for maximum user comfort
- Anti-vibration structure is engineered with five cushions within the motor housing to help minimize vibration
- Lower noise level at only 77 dB(A) for improved user comfort



Blade Length	520 mm (20-1/2")
Strokes Per Minute (SPM)	2,700
Tooth Spacing	26 mm (1")
Sound Pressure Level	77 dB(A)
Sound Power Level	84.3 dB(A)
Vibration Level	2.5 m/s ²
Dimensions (L x W x H)	938x195x193 mm (37"x7-5/8"x7-5/8")
Net weight	3.0 - 3.4 kg

DUH602Z

Cordless Hedge Trimmer



18V LXT BL Brushless Cordless Hedge Trimmer, Variable Speed, Brake, Reversing, 3-Speed, Constant Speed, Soft Start



Blade Length	600 mm (23-5/8")
Max Cutting Capacity	21.5mm
Strokes Per Minute (SPM)	High / Med / Low: 0 - 4,400 / 0 - 3,600 / 0 - 2,000
Max Output	520 W
Dimensions (L x W x H)	1,121x192x225 mm
Net weight	3.8-4.5kg



*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

* There is limited stock on some of the models. Please confirm availability.

DUN461WZ

Cordless Pole Hedge Trimmer



18V LXT Cordless 46 cm (18-1/8") Pole Hedge Trimmer

- Telescopic pipe for no need of stepladders
- 3,600 SPM for faster cutting
- New chip receiver can be mounted
- Angle adjustable hedge trimmer head; 60° tilt-up to 75° tilt-down from the horizontal position; Can be folded in the 180° position for easy transport and storage; Built-in clutch works to stop the blade motion even if the throttle lever is touched during folding operation; 10 angle settings; The angle of hedge trimmer head can be changed simply by pushing a button

XPT LXT 18V

Blade Length	460 mm (18-1/8")
Max Cutting Capacity	18 mm (11/16")
Strokes Per Minute (SPM)	3,600
Cycles Per Minute (CPM)	1,800
Continuous Use (min.)	w/ BL1830B: 60
Dimensions (L x W x H)	1,889 - 2,511 x 87 x 133 mm (74-1/2 - 99 x 3-7/16 x 5-1/4")
Net weight	3.4 kg (7.5 lbs.)

DUN500W

Cordless Pole Hedge Trimmer



18V LXT BL Brushless Cordless 50 cm (19-3/4") Pole Hedge Trimmer

- Lightweight for reduced operator fatigue
- Optimum curved blade for smooth cutting; New triple-edged cutting teeth are designed to easily catch and firmly hold twigs, also featuring excellent sharpness; Curved blades reduce friction resistance to suppress energy loss (DUN500W)
- BL motor delivers 4,400 SPM for faster cutting
- BL motor with high power to weight and size ratio
- BL motor eliminates carbon brushes, enabling the BL motor to run cooler and more efficiently for longer life



BL MOTOR **XPT LXT**
18V

Blade Length	500 mm (19-3/4")
Max Cutting Capacity	23.5 mm (15/16")
Strokes Per Minute (SPM)	High / Mid / Low: 4,400 / 3,600 / 2,000
Cycles Per Minute (CPM)	High / Mid / Low: 2,200 / 1,800 / 1,000
Continuous Use (min.)	w/ BL1860B High / Mid / Low: 60 / 90 / 190
Dimensions (L x W x H)	2,115 x 97 x 137 mm (83-1/4 x 3-13/16 x 5-3/8")
Net weight	3.9 - 4.3 kg (8.6 - 9.5 lbs.)

DUS158Z

Cordless Garden Sprayer



18V LXT Li-Ion Cordless 15L Garden Sprayer

- Battery powered garden sprayer with 18V voltage.
- Easy to set up and light to carry.
- Very quiet running sound.
- Large spray volume on a single full battery charge.



LXT WG
WET GUARD

18V

Max Pressure	0.5 MPa
Capacity	15 L
Hose Length	1.7m
Dimensions (L x W x H)	325 x 237 x 517 mm
Net weight	5.9 - 6.2 kg (13.0-13.7 lbs.)

DUC254Z Cordless Chain Saw

Efficiency equivalent to 23mL class engine chain saw

BL MOTOR

High operating efficiency

Outer Rotor BL Motor provides high operating efficiency



High operability

Chain brake and Variable speed trigger switch provide high operability equivalent to engine chain saw.



Net weight

3.2kg

with BL1850B (5.0Ah)
Guide Bar 200mm, Saw Chain 90PX



Captive nuts

prevent loss of nut when removing sprocket cover to replace guide bar or saw chain.

Cutting work amount
Work volume on a single full battery charge

About
160 cuts

- 50mm cedar timber
- saw chain : 90PX
- Battery : BL1850B














Live **Green & Grow Strong**

PRODUCTS

▣ INDUSTRIAL POWER TOOLS

CORDED TOOLS



-  Double Insulation
-  Variable Speed
-  Brake
-  Electronic 2-Speed
-  Torque Limiter
-  Constant Speed
-  Soft Start
-  Hook & Loop
-  Dust Collecting
-  Built-in Job Light
-  Carrying Case


CORDED TOOLS

GA4530

720 W Angle Grinder, Slide Switch

Angle Grinder

Ergonomically best possible grip for easy handling



Continuous rating input	720W
Wheel Diameter	115 mm (4-1/2")
No Load Speed (RPM)	11,000
Vibration Level	Surface Grinding: 7.5 m/s ² Disc Sanding: 2.5 m/s ²
Sound Pressure Level	85 dB(A)
Sound Power Level	96 dB(A)
Dimensions (L x W x H)	266x128x103 mm (10-1/2"x5"x4-1/16")
Net weight	1.89 - 2.23 kg (4.17 - 4.91 lbs.)
Power supply cord	2.5 m (8.2 ft)

GA4534

720 W Angle Grinder, Paddle Switch

Angle Grinder

Easy to operate paddle switch by the hand gripping motor housing



Continuous rating input	720W
Wheel Diameter	115 mm (4-1/2")
No Load Speed (RPM)	11,000
Vibration Level	Surface Grinding: 8.0 m/s ² Disc Sanding: 2.5 m/s ²
Sound Pressure Level	86 dB(A)
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	265x128x103 mm (10-3/8"x5"x4-1/16")
Net weight	1.98 - 2.31 kg (4.37 - 5.09 lbs.)
Power supply cord	2.5 m (8.2 ft)

9557HNG

840 W Angle Grinder, Slide Switch

Angle Grinder

High performance motor



Continuous rating input	840W
Wheel Diameter	115 mm (4-1/2")
No Load Speed (RPM)	11,000
Vibration Level	Surface Grinding: 7.5 m/s ² Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	86 dB(A)
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	271x130x106 mm (10-5/8"x5-1/8"x4-3/16")
Net weight	1.7 - 2.2 kg (3.8 - 4.8 lbs.)
Power supply cord	2.5 m (8.2 ft)

GA4540

1,100 W SJS II Angle Grinder, Slide Switch

Angle Grinder

Super Joint System II developed for effective vibration absorption



Continuous rating input	1,100W
Wheel Diameter	115 mm (4-1/2")
No Load Speed (RPM)	11,000
Vibration Level	Surface Grinding w/Anti-Vibration Side Grip 6.0 m/s ² Disc Sanding w/anti-vibration Side Grip 2.5m/s ² or less
Sound Pressure Level	86 dB(A)
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	303 x 130 x 116mm
Net weight	2.3 - 2.7kg
Power supply cord	2.5 m (8.2 ft)

GA4550

1,300 W Angle Grinder with Paddle Switch

Angle Grinder

- Enhanced shaft locking mechanism
- Large paddle switch
- Tool-less wheel cover adjustable to desired position
- Machined bevel gearing
- Easy hold rubberised soft grip barrel



Continuous rating input	1,300W
Wheel Diameter	115 mm (4-1/2")
No Load Speed (RPM)	11,000
Vibration Level	Surface Grinding w/ Anti-Vibration Side Grip: 7.0 m/s ² Disc Sanding w/ Anti-Vibration Side Grip: 2.5 m/s ² or less
Sound Pressure Level	91 dB(A)
Sound Power Level	102 dB(A)
Dimensions (L x W x H)	325 x 130 x 117 mm (12-3/4 x 5-1/8 x 4-5/8")
Net weight	2.4 - 2.7 kg (5.3 - 6.0 lbs.)
Power supply cord	2.5 m (8.2 ft)

9558HP

840 W Angle Grinder, Paddle Switch

Angle Grinder

Non-locking paddle switch grinders are for use in workplaces where safety is specified, especially in the mining & petrochemical industries.




Continuous rating input	840W
Wheel Diameter	125 mm (5")
No Load Speed (RPM)	11,000
Vibration Level	Surface Grinding: 9.0 m/s ² Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	86 dB(A)
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	273x139x106 mm (10-3/4"x5-1/2"x4-3/16")
Net weight	1.8 - 3.0 kg (3.9 - 6.7 lbs.)
Power supply cord	2.5 m (8.2 ft)

GA5010

1,050 W Angle Grinder, Finger Trigger Switch

Angle Grinder

Easy to grip motor housing.




Continuous rating input	1,050W
Wheel Diameter	125 mm (5")
No Load Speed (RPM)	12,000
Vibration Level	9.5 m/s ²
	Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Dimensions (L x W x H)	356x139x112 mm (14"x5-1/2"x4-3/8")
Net weight	2.6 - 3.8 kg (5.8 - 8.4 lbs.)
Power supply cord	2.5 m (8.2 ft)

GA5040

1,100 W SJS II Angle Grinder, Slide Switch

Angle Grinder

"Super Joint System II" developed for effective vibration absorption.



Continuous rating input	1,100W
Wheel Diameter	125 mm (5")
No Load Speed (RPM)	11,000
Vibration Level	Surface Grinding w/ Anti-Vibration Side Grip: 6.0 m/s ²
	Disc Sanding w/ Anti-Vibration Side Grip: 2.5 m/s ² or less
Sound Pressure Level	86 dB(A)
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	303x140x116 mm (11-7/8"x5-1/2"x4-9/16")
Net weight	2.4 - 3.5 kg (5.2 - 7.8 lbs.)
Power supply cord	2.5 m (8.2 ft)

GA5040C

1,400 W SJS II Variable Speed Angle Grinder, Anti-Restart Function, Soft Start, Slide Switch

Angle Grinder

"Super Joint System II" developed for effective vibration absorption.

- Anti-restart function
- Re-designed durable gear housing
- Variable speed control dial
- Constant speed control



Continuous rating input	1,400W
Wheel Diameter	125 mm (5")
No Load Speed (RPM)	2,800-11,000
Vibration Level	Surface Grinding w/ Anti-Vibration Side Grip: 5.5 m/s ²
	Disc Sanding w/ Anti-Vibration Side Grip: 2.5 m/s ²
Sound Pressure Level	86 dB(A)
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	303x140x116 mm (11-7/8"x5-1/2"x4-9/16")
Net weight	2.5 - 3.6 kg (5.6 - 8.0 lbs.)
Power supply cord	2.5 m (8.2 ft)

GA7010C

1,800 W Angle Grinder, Soft Start, Large Trigger Switch

Angle Grinder

- Extra Slim design
- Compact & lightweight with high power to weight ratio for greater efficiency



Continuous rating input	1,800W
Wheel Diameter	180 mm (7")
No Load Speed (RPM)	8,400
Vibration Level	Surface Grinding: 9.5 m/s ²
	Disc Sanding: 2.5 m/s ²
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Dimensions (L x W x H)	453x200x137 mm (17-7/8"x7-7/8"x5-3/8")
Net weight	4.2 - 4.7 kg (9.26 - 10.36 lbs.)
Power supply cord	2.5 m (8.2 ft)

GA9010C

1,800 W Angle Grinder, Soft Start, Large Trigger Switch

Angle Grinder

- Extra Slim design
- High power to weight ratio for greater efficiency




Continuous rating input	1,800W
Wheel Diameter	230 mm (9")
No Load Speed (RPM)	6,000
Vibration Level	Surface Grinding: 9.5 m/s ²
	Disc Sanding: 2.5 m/s ²
Sound Pressure Level	91 dB(A)
Sound Power Level	102 dB(A)
Dimensions (L x W x H)	453x250x137 mm (17-7/8"x9-7/8"x5-3/8")
Net weight	4.36 - 6.65 kg (9.6 - 14.7 lbs.)
Power supply cord	2.5 m (8.2 ft)

GA7020

2,200 W Angle Grinder, Large Trigger Switch

Angle Grinder

Outstanding durability.



Continuous rating input	2,200W
Wheel Diameter	180 mm
No Load Speed (RPM)	8,500
Vibration Level	Surface Grinding: 8 m/s ²
	Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Dimensions (L x W x H)	473x200x140 mm (18-5/8"x7-7/4"x5-1/2")
Net weight	5.56 - 6.06 kg
Power supply cord	2.5 m (8.2 ft)

* Although Angle Grinders are portrayed with a grinding disc, 180mm & 230mm Angle Grinder are sold without grinding discs.

* There is limited stock on some of the models. Please confirm availability.

CORDED TOOLS

GA9050

2,000 W Angle Grinder, Deadman's Switch

Angle Grinder

Extra Slim design with "Deadman's" switch.



Continuous rating input	2,000W
Wheel Diameter	230 mm (9")
No Load Speed (RPM)	6,600
Vibration Level	Surface Grinding: 5.5 m/s ² Disc Sanding: 2.5 m/s ²
Sound Pressure Level	94 dB(A)
Sound Power Level	105 dB(A)
Dimensions (L x W x H)	432x250x132 mm (17"x9-7/8"x5-3/16")
Net weight	4.64 - 6.94 kg (10.2 - 15.3 lbs.)
Power supply cord	2.5 m (8.2 ft)

GA9020

2,200 W Angle Grinder, Large Trigger Switch

Angle Grinder

Outstanding durability.



Continuous rating input	2,200W
Wheel Diameter	230 mm (9")
No Load Speed (RPM)	6,000
Vibration Level	Surface Grinding: 5.5 m/s ² Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Dimensions (L x W x H)	473x249x140 mm (18-5/8"x9-3/4"x5-1/2")
Net weight	5.76 - 8.05 kg (12.7 - 17.8 lbs.)
Power supply cord	2.5 m (8.2 ft)

GA9020K

2,200 W Angle Grinder, Large Trigger Switch

Angle Grinder

Gear housing can be positioned at every 90, as with GA9020.



Continuous rating input	2,200W
Wheel Diameter	230 mm (9")
No Load Speed (RPM)	6,000
Vibration Level	Surface Grinding: 5.5 m/s ² Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Dimensions (L x W x H)	473x249x140 mm (18-5/8"x9-3/4"x5-1/2")
Net weight	5.76 - 8.05 kg (12.7 - 17.8 lbs.)
Power supply cord	2.5 m (8.2 ft)

GA9060

2,200 W Angle Grinder, Large Trigger Switch

Angle Grinder

Developed for Heavy Duty applications.



Continuous rating input	2,200W
Wheel Diameter	230 mm (9")
No Load Speed (RPM)	6,600
Vibration Level	Surface Grinding w/ Anti-Vibration Side Grip: 6.0 m/s ² Disc Sanding w/ Anti-Vibration Side Grip: 2.5 m/s ² or less
Sound Pressure Level	91 dB(A)
Sound Power Level	102 dB(A)
Dimensions (L x W x H)	450x250x144 mm (17-3/4"x9-7/8"x5-5/8")
Net weight	5.50 - 7.86 kg (12.1 - 17.3 lbs.)
Power supply cord	2.5 m (8.2 ft)

GA9040SK01

2,600 W Angle Grinder, Soft Start, Large Trigger Switch

Angle Grinder

- Anti-Vibrating grip
- Rotatable rear handle and durability



Continuous rating input	2,600W
Wheel Diameter	230 mm (9")
No Load Speed (RPM)	6,600
Vibration Level	Surface Grinding: 5.5 m/s ² Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Dimensions (L x W x H)	503x250x140 mm (19-3/4"x9-7/8"x5-1/2")
Net weight	6.65 - 8.94 kg (14.7 - 19.7 lbs.)
Power supply cord	2.5 m (8.2 ft)

BELT SANDERS

9032

500W, Variable Speed, Dust Collecting

Belt Sander

Optional 6 and 13mm sanding arms available for a wide range of sanding and filing jobs.



Continuous rating input	500W
Belt Size	9 x 533 mm (3/8" x 21")
Belt Speed	300 - 1,700 m/min
Max sanding depth	110 mm (4-5/16")
Overall Length	420 mm (16-1/2")
Net weight	1.6 kg (3.5 lbs.)
Power supply cord	2.5 m (8.2 ft)

BELT SANDERS

9031

550W Belt Sander, Variable Speed, Dust Collecting

Belt Sander



- Belt speed can be adjusted for sanding a wide variety of materials
- Ideal for glass



410 W



Continuous rating input	550W
Belt Size	30 x 533 mm (1-1/8" x 21")
Belt Speed	200 - 1,000 m/min
Overall Length	380 mm (15")
Net weight	2.1 kg (4.6 lbs.)
Power supply cord	2.5 m (8.2 ft)

9401

940W Belt Sander, Dust Collecting

Belt Sander



Perfect for flush along side sanding.



155 W



Continuous rating input	940W
Belt Size	100 x 610mm (4" x 24")
Belt Speed	350m / min. (1,150ft/min)
Overall Length	374mm (14-3/4")
Net weight	7.3kg (16.1lbs)
Power supply cord	5.0m (16.4ft)

9403

1200W Belt Sander, Dust Collecting

Belt Sander



Powerful motor for high production use.



303 W




Continuous rating input	1200W
Belt Size	100 x 610mm (4" x 24")
Belt Speed	500m / min. (1,640ft/min)
Overall Length	353mm (13-7/8")
Net weight	5.7kg (12.56lbs)
Power supply cord	5.0m (16.4ft)

BISCUIT JOINER

PJ7000

701W Biscuit Joiner, Carry Case, Dust Collecting

Biscuit Joiner



New compact and lightweight design



459 W



Continuous rating input	701W
Blade Diameter	100 mm (4")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	302x139x145 mm
Net weight	2.8 kg (6.2 lbs.)
Power supply cord	2.5 m (8.2 ft)

*Standard with Blade Part No. B-20644

BLOWERS

UB1102

600W, Blower without Dust Bag

Blower



High output air volume.



304 W



Continuous rating input	600W
Max Air Volume	4.1 m ³ /min
Max Air Velocity	91 m/s
Air Pressure	5.7 kPa
No Load Speed (RPM)	16,000
Vibration Level	Operation w/o Load: 2.5 m/s ²
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	479x185x178 mm
Net weight	1.9 - 2.2 kg (4.3 - 4.8 lbs.)
Power supply cord	2.5 m (8.2 ft)

UB1103

600W, Blower, Variable Speed with Dust Bag

Blower



Powerful Motor.



304 W



Continuous rating input	600W
Max Air Volume	0 - 4.1 m ³ /min
Max Air Velocity	0 - 91 m/s
Air Pressure	0 - 5.7 kPa
No Load Speed (RPM)	0 - 16,000
Vibration Level	Operation w/o Load: 2.5 m/s ²
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	479x185x178 mm
Net weight	1.9 - 2.2 kg (4.3 - 4.8 lbs.)
Power supply cord	2.5 m (8.2 ft)

* There is limited stock on some of the models. Please confirm availability.

BRAD NAILERS

AF506

18 Gauge Pneumatic Brad Nailer, Depth Adjusting

Brad Nailer



F-Type.



Nail Length	15mm - 50mm
Gauge	18Ga
Magazine Capacity	100pcs
Operating Air Pressure	70 - 120 PSI
Net weight	1.3kg

AF601

16 Gauge Pneumatic Brad Nailer, Depth Adjusting, Single / Sequential Firing

Brad Nailer



T-Type.



Nail Length	25 - 64 mm (1" - 2-1/2")
Gauge	16 Ga
Operating Pressure	0.49 - 0.83 MPa (70 - 120 PSI)
Magazine Capacity	100
Dimensions (L x W x H)	304x95x297 mm (12"x3-3/4"x11-3/4")
Net weight	1.7 kg (3.8 lbs.)

CIRCULAR SAWS

HS7601K

1200W Circular Saw, Dust Collecting, Wood Cutting

Circular Saw



- Compact and lightweight with new aesthetic design
- TCT blade



Continuous rating input	1,200W
Blade Diameter	190 mm (7-1/2")
Max Cutting Capacity	90°: 66 mm (2-5/8") 45°: 46 mm (1-13/16")
No Load Speed (RPM)	5,200
Dimensions (L x W x H)	309x232x255 mm
Net weight	3.8 kg (8.4 lbs.)
Power supply cord	2.5 m (8.2 ft)

*Standard with Blade Part No. B-02939

N5900B

2000W Circular Saw, Dust Collecting, Wood Cutting

Circular Saw



- A hard working saw with the power to rip through most materials
- TCT blade



Continuous rating input	2,000W
Max Cutting Capacity	90°: 85 mm (3-3/8") 45°: 60 mm (2-3/8") 50°: 53 mm (2-1/16")
Blade Diameter	235 mm (9-1/4")
No Load Speed (RPM)	4,100
Overall Length	380 mm (15")
Net weight	6.8 kg (14.8 lbs.)
Power supply cord	2.5 m (8.2 ft)

*Standard with Blade Part No. A-89866

5903RK

2000W Circular Saw, Dust Collecting, Soft Start, Brake, Wood Cutting

Circular Saw



- With anti-kickback riving knife
- TCT blade



Continuous rating input	2,000W
Max Cutting Capacity	90°: 85 mm (3-11/32") 45°: 64 mm (2-1/2")
Blade Diameter	235 mm (9-1/4")
No Load Speed (RPM)	4,500
Overall Length	400 mm (15-3/4")
Net weight	7.2 kg (15.9 lbs.)
Power supply cord	2.5 m (8.2 ft)

*Standard with Blade Part No. A-89866

HS0600

2000W Circular Saw, Wood Cutting

Circular Saw



- Enables single-pass cutting of 4 x materials
- TCT blade



Continuous rating input	2,000W
Blade Diameter	260 / 270 mm
Max Cutting Capacity	90°: 97 / 101 mm 50°: 61 mm
No Load Speed (RPM)	4,300
Vibration Level	Cutting Wood: 2.5 m/s ² or less
Sound Pressure Level	94 dB(A)
Sound Power Level	105 dB(A)
Dimensions (L x W x H)	418x273x324 mm
Net weight	6.9 kg (15.2 lbs.)
Power supply cord	2.5 m (8.2 ft)

*Standard with Blade Part No. B-12859

CIRCULAR SAWS

5143R

2200W Circular Saw, Soft Start, Brake, Dust Collection, Wood Cutting

Circular Saw



- 130mm cutting capacity
- TCT blade



204 mm



Continuous rating input	2,200W
Blade Diameter	355 mm (14")
Max Cutting Capacity	90°: 130 mm (5-1/8")
	45°: 90 mm (3-1/2")
No Load Speed (RPM)	2,700
Overall Length	607 mm (23-7/8")
Net weight	12.5 kg (27.6 lbs.)
Power supply cord	5.0 m (16.4 ft)

*Standard with Blade Part No. A-80014

SP6000J

1300W Circular Saw, Variable Speed, Constant Speed, Soft Start, Dust Collecting, Brake, Plunge Cut

Circular Saw



- High accuracy clean cutting
- Splinter-free Cutting
- Connectable to vacuum cleaner

Supplied with: 1.4m rail and 2 x clamps.



304 mm



Continuous rating input	1,300W
Blade Diameter	165 mm (6-1/2")
Max Cutting Capacity	90°: 56 mm (2-3/16")
	45°: 40 mm (1-9/16")
	48°: 38 mm (1-1/2")
No Load Speed (RPM)	2,200 - 6,400
Dimensions (LxWxH)	341x225x250 mm
Net weight	4.1 kg (9 lbs.)
Power supply cord	2.5 m (8.2 ft)

*Standard with Blade Part No. B-07353

4131

1100W, Metal Cutting

Metal Cutter



- Cuts steel up to 6mm thick with minimal burrs and burns
- TCT blade for mild steel



304 mm



Continuous rating input	1,100W
Blade Diameter	185 mm
Max Cutting Capacity	63mm
No Load Speed (RPM)	3,500
Net weight	4.8kg
Power supply cord	2.5m

*Standard with Blade Part No. B-03931

CONCRETE CUTTERS


SG1251J

1400W Wall Chaser, Soft Start, Constant Speed, Dust Collection, Carry Case, Double Blade

Wall Chaser



- Clean, compact & comfortable
- Two blades included



318 mm



Continuous rating input	1,400W
Capacity	Depth : 0-30 mm (0 - 1-3/16")
	Width: 6-30 mm (1/4 - 1-3/16")
Blade Diameter	125 mm (5")
No Load Speed (RPM)	10,000
Dimensions (LxWxH)	350x151x178 mm
Net weight	4.3 kg (9.5 lbs.)
Power supply cord	5.0 m (16.4 ft)

*Standard with Blade Part No. A-80438

4107R

1,400W Cutter, Wet Cutting, Diamond Tools

Cutter



Quick and clean cutting.



155 mm



Continuous rating input	1,400W
Capacity	Max cutting : 60 mm (2-3/8")
Blade Diameter	180 mm (7-1/8")
No Load Speed (RPM)	5,000
Overall Length	370 mm (14-9/16")
Net weight	6.3 kg (14.5 lbs.)
Power supply cord	5.0 m (16.4 ft)

4114S

2400W Electric Power Cutter, Dry Cutting, Soft Start, Dust Collecting

Electric Power Cutter



- High torque delivered at low motor speed
- Without blade



203 mm



Continuous rating input	2,400W
Capacity	Max cutting : 125 mm (5")
Wheel Diameter	355 mm (14")
Hole Diameter	25.4 mm (1")
No Load Speed (RPM)	3,500
Dimensions (LxWxH)	673x240x329 mm
Net weight	10.8 kg (23.9 lbs.)
Power supply cord	2.5 m (8.2 ft)

* There is limited stock on some of the models. Please confirm availability.

CONCRETE PLANER

PC5001C

1400W, Soft Start, Brake, Dust Collection, Constant Speed

Concrete Planer



- Most suitable for planing concrete
- Capable of planing flush to corners
- With off-set diamond wheel



253 mm



Continuous rating input	1,400W
Wheel Diameter	125 mm (5")
No Load Speed (RPM)	10,000
Dimensions (L x W x H)	479x182x195 mm
Net weight	4 kg (8.9 lbs.)
Power supply cord	5 m (16.4 ft)

CUT-OFF SAWS

LW1401

2200W, Metal Cutting with abrasive wheel

Cut-Off Saw



Powerful 2,200W motor delivers 3,800 r/min for superior performance and durability.



204 mm



Continuous rating input	2,200W
Wheel Diameter	355 mm (14")
No Load Speed (RPM)	3,800
Capacity at 90°	Round: 127 mm (5") Rectangular: 115x130 mm (4-1/2"x5-1/8")
Vibration Level	2.5 m/s ² or less
Sound Pressure Level	102 dB(A)
Sound Power Level	110 dB(A)
Dimensions (L x W x H)	500x295x640 mm
Net weight	18.3 kg (40.3 lbs.)
Power supply cord	2.5 m (8.2 ft)

*Standard with Blade Part no. B-19881


LC1230N

1750W, Cold Metal Cutting with TCT blade for Mild Steel and Stainless Steel

Cut-Off Saw



"Cold" cutting for extra safety and virtually burr-free cuts.



204 mm



Continuous rating input	1,750W
Blade Diameter	305 mm (12")
Max Cutting Capacity	90°: 115 mm (4-1/2") 90°: 75 x 150 mm (2-15/16" x 5-7/8") 45°: 90 mm (3-1/2") 45°: 85 x 85 mm (3-5/16" x 3-5/16")
No Load Speed (RPM)	1,300
Dimensions (L x W x H)	516x306x603 mm
Net weight	19.3 kg (42.5 lbs.)
Power supply cord	2.5 m (8.2 ft)

*Standard with Blade Part No. A-87242 - for mild steel

DEMOLITION HAMMERS & BREAKERS

HM0870C

1100W, Variable Speed, Constant Speed, SDS-Max, Soft Start, Carry Case, 7.6 Joules

Light Clipper



Powerful 1,100W in compact and lightweight body.



350 mm



Continuous rating input	1,100W
Blows Per Minute (BPM)	1,100 - 2,650
Sound Pressure Level	87 dB(A)
Sound Power Level	98 dB(A)
Dimensions (L x W x H)	449x109x230 mm
Net weight	5.1 - 5.3 kg (11.1 - 11.6 lbs.)
Power supply cord	5.0 m (16.4 ft)

HM1203C

1510W, Variable Speed, Constant Speed, SDS-Max, Soft Start, Carry Case, 19.1 Joules

Medium Clipper



High durability and excellent demolition performance.



175 mm



Continuous rating input	1,510W
Blows Per Minute (BPM)	950 - 1,900
Sound Pressure Level	81 dB(A)
Sound Power Level	95 dB(A)
Dimensions (L x W x H)	576x128x265 mm
Net weight	9.7 kg (21.5 lbs.)
Power supply cord	5.0 m (16.4 ft)

HM1501

1850W, 30mm Hex Shank, Soft Start, Carry Case, 48.1 Joules

Electric Breaker



Thanks to the completely redesigned hammering mechanism and increased motor power (compared with predecessor model), higher power is achieved with a minimum increase in tool size and weight.



218 mm



Continuous rating input	1,850W
Impact Energy	48.1 J
Blows Per Minute (BPM)	1,300
Dimensions (L x W x H)	809 x 130 x 265 mm (31-3/4 x 5-1/8 x 10-3/8")
Net weight	18.4 kg
Power supply cord	5.0 m (16.4 ft)

* There is limited stock on some of the models. Please confirm availability.

High Power

HM1812

Electric Breaker

Vibration level 6.5m/s^2

The first electric breaker from Makita that is equipped with vibration absorbing housing, providing a practical combination of high power and low vibration.

SPECIFICATIONS

- Continuous Rating Input: 2,000W
- Blows Per Minute (BPM): 870
- Sound Pressure Level: 96dB(A)
- Sound Power Level: 107dB(A)
- Dimensions (L x W x H): 845x210x608mm
- Net Weight: 31,3 kg (69 lbs)
- Power Supply Cord: 5.0 m (16.4 ft)




28.6mm Hex
Shank Type

Vibration absorbing housing

Providing a practical combination of high power and low vibration.


Vibration absorbing
spring (4 places)

The machine holding section
is separated from the motor/
transmission section.



Counter weight mechanism

Reduces vibration during chipping operation.



When piston is moving forward



When piston is moving back

**72.8
Joules**

Counter weight mechanism

Soft no-load function

Vibration absorbing housing

**SOFT
NO LOAD**

AVT
ANTI VIBRATION TECHNOLOGY

DEMOLITION HAMMERS & BREAKERS

HM1307C

1510W, Variable Speed, Constant Speed, 30mm Hex Shank, Soft Start, Carry Case, 25.5 Joules

Electric Breaker



Durable, lightweight moulded carry case with wheels



175



Continuous rating input	1,510W
Blows Per Minute (BPM)	730 - 1,450
Sound Pressure Level	81 dB(A)
Sound Power Level	101 dB(A)
Dimensions (L x W x H)	715x129x266 mm
Net weight	15.3 kg
Power supply cord	5.0 m (16.4 ft)

HM1802

2000W, 28.6mm Hex Shank, Soft Start, Carry Case, 71.4 Joules

Electric Breaker (without AVT)



Highest-in-class demolition power



218



Continuous rating input	2,000W
Blows Per Minute (BPM)	870
Sound Pressure Level	95 dB(A)
Sound Power Level	106 dB(A)
Dimensions (L x W x H)	843x210x608 mm
Net weight	29.4 kg (64.8 lbs.)
Power supply cord	5.0 m (16.4 ft)

HM1812

2000W, 28.6mm Hex Shank, Soft Start, Carry Case, 72.8 Joules

Electric Breaker (with AVT)



Highest-in-class demolition power



218



Continuous rating input	2,000W
Blows Per Minute (BPM)	870
Sound Pressure Level	96 dB(A)
Sound Power Level	107 dB(A)
Dimensions (L x W x H)	843x210x608 mm
Net weight	31.3 kg (69 lbs.)
Power supply cord	5.0 m (16.4 ft)

DIE GRINDERS

GD0603

240W, Die Grinder with 6mm collet

Die Grinder



Easy handling, compact die grinder with new aesthetic design.

Standard with 6mm collet.



63



Continuous rating input	240W
Capacity	Collet : 6 mm or 1/4"
Max Wheel Diameter	19 mm (3/4")
No Load Speed (RPM)	28,000
Diameter of grip	65 mm
Circumference of grip	203 mm
Dimensions (L x W x H)	289x64x67 mm
Net weight	0.98 kg (2.16 lbs.)
Power supply cord	2.5 m (8.2 ft)

GD0600

400W, Die Grinder with 6mm collet

Die Grinder



Small circumference housing for easy handling.

Standard with 6mm collet.



325



Continuous rating input	400W
Capacity	Collet : 3,6 mm or 1/8", 1/4"
Wheel Diameter	38 mm (1-1/2")
No Load Speed (RPM)	25,000
Dimensions (L x W x H)	358x82x82 mm
Net weight	1.71 - 1.87 kg (3.77 - 4.12 lbs.)
Power supply cord	2.5 m (8.2 ft)

GD0800C

750W, Soft Start, Constant Speed, Variable Speed, High Speed

Die Grinder



High-speed die grinder with maximum 8mm collet capacity.

Standard with 6mm collet.



318



Continuous rating input	750W
Capacity	Collet : 6mm
Optional Collet	8mm
No Load Speed (RPM)	7,000 - 28,000
Dimensions (L x W x H)	371x75x75 mm
Net weight	1.88 kg
Power supply cord	2.5m

DIE GRINDERS

GD0801C

750W, Soft Start, Constant Speed, Variable Speed, High Speed

Die Grinder

Easy-to-operate paddle type on/off switch.

Standard with 6mm collet.



Continuous rating input	750W
Capacity	Collet : 8 mm (1/4")
Max Wheel Diameter	25 mm (1")
No Load Speed (RPM)	7,000-29,000
Vibration Level	Surface Grinding: 3.5 m/s ²
Sound Pressure Level	80 dB(A)
Sound Power Level	91 dB(A)
Dimensions (L x W x H)	390x75x88 mm
Net weight	1.96 - 1.97 kg (4.32 - 4.34 lbs.)
Power supply cord	2.5 m (8.2 ft)

GD0810C

750W, Soft Start, Brake, Constant Speed, Low Speed

Die Grinder

With high torque, ideal for grinding internal surfaces removing paint etc. using flap wheel discs.

Standard with 6mm collet.



Continuous rating input	750W
Capacity	Collet : 6 mm
Wheel Diameter	50 mm (2")
No Load Speed (RPM)	1,800-7,000
Overall Length	371 mm (14-5/8")
Net weight	1.9 kg (4.2 lbs.)
Power supply cord	2.5 m (8.2 ft)

GD0811C

750W, Soft Start, Brake, Constant Speed, Low Speed

Die Grinder

Easy-to-operate paddle type on/off switch.

Standard with 6mm collet.



Continuous rating input	750W
Capacity	Collet : 6 mm (and 8mm optional)
Max Wheel Diameter	50 mm (2")
No Load Speed (RPM)	1,800-7,000
Vibration Level	Surface Grinding: 2.5 m/s ² or less
Sound Pressure Level	78 dB(A)
Dimensions (L x W x H)	390x75x88 mm (15-3/8"x2-15/16"x3-1/2")
Net weight	1.99 - 2.00 kg (4.39 - 4.41 lbs.)
Power supply cord	2.5 m (8.2 ft)

GS5000

750W, 125mm Straight Grinder

Straight Grinder

- "Deadman" switch
- Lightweight with large soft grip



Continuous rating input	750W
Wheel Diameter	125 mm (5")
Hole Diameter	12.7, 20 mm (1/2, 13/16")
No Load Speed (RPM)	5,600
Dimensions (L x W x H)	590x189x116 mm
Net weight	5.0 - 5.2 kg (11.0 - 11.5 lbs.)
Power supply cord	2.5 m (8.2 ft)

DRILLS

DP2010N

370W, Variable Speed, Reversing, 6.5mm Gear Chuck, Non Hammer

Rotary Drill

- Compact, yet with high power
- Ideal for high speed drilling into thin material



Continuous rating input	370W
Capacity	Steel: 6.5 mm (1/4") Wood: 15 mm (9/16")
No Load Speed (RPM)	0-4,200
Dimensions (L x W x H)	209x64x175 mm (8-1/4"x2-1/2"x6-7/8")
Net weight	1.0 kg (2.2 lbs.)
Power supply cord	2.0 m (6.6 ft)

6411

450W, 10mm Gear Chuck, Non Hammer

Rotary Drill

Compact & lightweight yet powerful.



Continuous rating input	450W
Capacity	Steel: 10 mm (3/8") Wood: 25 mm (1")
No Load Speed (RPM)	3,400
Dimensions (L x W x H)	228x64x183 mm (9"x2-1/2"x7-1/4")
Net weight	1.3 kg (2.8 lbs.)
Power supply cord	2.0 m (6.6 ft)

* Although Die Grinders are portrayed with a wheel point they are sold without wheel points or flap wheels.

* There is limited stock on some of the models. Please confirm availability.

CORDED TOOLS

DRILLS

DP4002

750W, 13mm Gear Chuck, Variable Speed, Reversing, Non Hammer

Rotary Drill



Extra powerful motor provides the highest torque in its class.



Continuous rating input	750W
Capacity	Steel: 13 mm (1/2") Wood: 38 mm (1-1/2")
No Load Speed (RPM)	0-700
Overall Length	304 mm (12")
Net weight	2.7 kg (5.8 lbs.)
Power supply cord	2.5 m (8.2 ft)

DA3010F

450W, Variable Speed, Reversing, 10mm Gear Chuck, Non Hammer

Angle Drill



Ideal for close quarter drilling 66mm head height.



Continuous rating input	450W
Capacity	Steel: 10 mm (3/8") Wood: 25 mm (1")
No Load Speed (RPM)	0-2,400
Overall Length	270 mm (11-1/8")
Net weight	1.6 kg (3.5 lbs.)
Power supply cord	2.5 m (8.2 ft)

DS4012

750W, 13mm Gear Chuck, Variable Speed, Reversing, Non Hammer

Rotary Drill



360 Degree rotatable D-handle with 24 positive stops for multi-position operation.



Continuous rating input	750W
Capacity	Steel: 13 mm (1/2") Wood: 36 mm (1-7/16")
No Load Speed (RPM)	0-600
Dimensions (LxWxH)	340x83x390 mm (13-3/8"x3-1/4"x15-3/8")
Net weight	2.8 kg (6.2 lbs.)
Power supply cord	2.5 m (8.2 ft)

HEAT GUN

HG6031VK

1,800W Heat Gun

Heat Gun



Temperature controlled by pontentimeter.



Continuous rating input	1,800W
Air Temperature (°C) /	Switch 1: 50 - 400 / 250
Flow (L/min)	Switch 2: 100 - 600 / 500
Dimensions (L x W x H)	257x85x206 mm
Net weight	0.67 kg (1.5 lbs.)
Power supply cord	2.0 m (6.6 ft)

TABLE SAWS

MLT100N


1500W, Soft Start, Brake, Dust Collection

Table Saw



Provided with sliding left extension sub-table.

Optional WST03 stand for MLT100 Table Saw



Continuous rating input	1,500W
Max Cutting Capacity	90°: 93 mm 45°: 64 mm
Blade Diameter	260 mm
No Load Speed (RPM)	4,300
Bore Size	30mm
Net weight	34.8 - 35.1 kg
Power supply cord	2.5 m (8.2 ft)

*Standard with Blade Part No. D-46408


MITRE & TABLE SAWS

LS0815FLN

1400W, Double Slide Compound Mitre Saw, Laser Marker, Dust Collecting, Soft Start, Bevel Cutting, Electric Brake

Mitre Saw

High dust extraction for clean work environment.

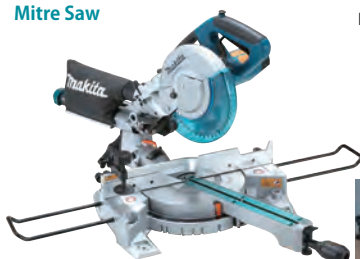

JM23500117



Continuous rating input	1,400W
Blade Diameter	216 mm (8-1/2")
Miter Angle	50° L / 60° R
Bevel Angle	48° L / 5° R
Max Cutting Capacity	90° Miter: 65 x 305 mm (2-9/16" x 12") 45° Miter, L/R: 65 x 215 mm (2-9/16" x 8-1/2")
No Load Speed (RPM)	5,000
Sound Pressure Level	87 dB(A)
Sound Power Level	110 dB(A)
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	755x450x488 mm
Net weight	14.1 kg (31.1 lbs.)
Power supply cord	2.5 m (8.2 ft)

*Standard with Blade Part No. B-39506

LS1040N

1650W, Compound Mitre Saw, Dust Collecting, Bevel Cutting, Brake

Mitre Saw

Bevel cuts up to 45 degrees left.



155



Continuous rating input	1,650W
Blade Diameter	260 mm (10-1/4")
Miter Angle	45° L / 52° R
Bevel Angle	45° L
Max Cutting Capacity	90°: 90.5 x 95 mm 45°: 90.5 x 67 mm
No Load Speed (RPM)	5,100
Sound Pressure Level	93 dB(A)
Sound Power Level	106 dB(A)
Dimensions (L x W x H)	530x476x532 mm
Net weight	12.4 kg (27.3 lbs.)
Power supply cord	2.5 m (8.2 ft)

*Standard with Blade Part No. A-83696

LS1018LN

1430W, Double Slide Compound Mitre Saw, Soft Start, Brake, Dust Collection, Laser Marker, Bevel Cutting

Mitre Saw

- Bevel cutting 45 degrees L + R
- TCT wood cutting blade



JM23000123



Continuous rating input	1,430W
Blade Diameter	255 - 260 mm (10 - 10-1/4")
Miter Angle	47° L / 60° R
Bevel Angle	45° L / 45°
Max Cutting Capacity	R90°: 91 x 305 mm (3-5/8" x 12") 45°: 91 x 215 mm (3-5/8" x 8-1/2")
No Load Speed (RPM)	4,300
Sound Pressure Level	97 dB(A)
Sound Power Level	103 dB(A)
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	825x536x633 mm
Net weight	20.6 kg (45.4 lbs.)
Power supply cord	2.5 m (8.2 ft)

*Standard with Blade Part No. JM23100005

LS1019L

1510W, Double Slide Compound Mitre Saw, Soft Start, Brake, Dust Collection, Laser Marker, Bevel Cutting, Constant Speed

Mitre Saw

- Single sliding system enables smooth operation to produce superior cuts.
- TCT wood cutting blade.



155



Continuous rating input	1,510W
Blade Diameter	260 mm (10-1/4")
Bevel Angle	48° L / 48° R
Miter Angle	60° L / 60° R
Max Cutting Capacity	90°/90°: 68 x 310 mm (Bevel/Miter) 90°/45°LR: 68 x 218 mm
No Load Speed (RPM)	3,200
Sound Pressure Level	91 dB(A)
Sound Power Level	101 dB(A)
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	805x644x660 mm
Net weight	26.3 kg (57.9 lbs.)
Power supply cord	2.5 m (8.2 ft.)

LS1219L

1800W, Slide Compound Mitre Saw, Soft Start, Brake, Dust Collection, Laser Marker, Bevel Cutting

Mitre Saw

Large turn base supports workpiece securely for increased stability.



155



Continuous rating input	1,800W
Blade Diameter	305 mm (12")
Bevel Angle	48° L / 48° R
Miter Angle	60° L / 60° R
Max Cutting Capacity	90°/90°: 92 x 382 mm (3-5/8" x 15") (Bevel/Miter) 90°/45°LR: 92 x 268 mm (3-5/8" x 10-1/2")
No Load Speed (RPM)	3,200
Sound Pressure Level	91 dB(A)
Sound Power Level	100 dB(A)
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	898x664x725 mm
Net weight	29.5 kg (65.0 lbs.)
Power supply cord	2.5 m (8.2 ft)

* There is limited stock on some of the models. Please confirm availability.

IMPACT DRILLS

HP0300

320W, Variable Speed, Reversing, Mechanical 2-speed 10mm Gear Chuck, Hammer Action

Hammer Driver Drill

Double insulation for increased user protection.



410 W



Continuous rating input	320W
Capacity	Concrete: 8 mm (5/16")
	Steel: 10 mm (3/8") Wood: 28 mm (1-1/8")
Chuck Capacity	1.0 - 10 mm (1/32 - 3/8")
Blows Per Minute (BPM)	High: 0 - 22,500 Low: 0 - 6,750
No Load Speed (RPM)	High: 0 - 1,500 Low: 0 - 450
Max Fastening Torque	Hard / Soft: 56.0 / 21.0 N-m (500 / 190 in.lbs.)
Max lock torque	42.0 N-m (370 in.lbs.)
Vibration Level	Impact Drilling into Concrete: 12.5 m/s ²
	Drilling into Metal: 2.5 m/s ² or less
Net weight	1.3 kg (2.8 lbs.)
Power supply cord	2.5 m (8.2 ft)

HP1230

400W, Variable Speed, Reversing, 10mm Gear Chuck, Hammer Action

Impact Drill

High quality aluminium gear housing provides toughness.



419 W



Continuous rating input	400W
Capacity	Concrete: 12 mm (15/32")
	Steel: 10 mm (3/8")
	Wood: 15 mm (9/16")
Chuck Capacity	1.5 - 10mm
Impacts Per Minute (IPM)	0 - 31,900
No Load Speed (RPM)	0 - 2,900
Dimensions (LxWxH)	239x67x188 mm
Net weight	1.7 kg (3.7 lbs.)
Power supply cord	2.0 m (6.6 ft)

HP1640

680W, Variable Speed, Reversing, 13mm Gear Chuck, Hammer Action

Impact Drill

Dual purposes for "rotation only" or "rotation with hammering."



419 W



Continuous rating input	680W
Capacity	Concrete: 16 mm (5/8")
	Steel: 13 mm (1/2")
	Wood: 30 mm (1-3/16")
Chuck Capacity	1.5 - 13mm
No Load Speed (RPM)	0 - 2,800
Impacts Per Minute (IPM)	0 - 44,800
Vibration Level	Hammer Drilling into Concrete: 19 m/s ²
	Drilling Into Metal: 2.5 m/s ²
Sound Pressure Level	92 dB(A)
Sound Power Level	103 dB(A)
Dimensions (L x W x H)	303x72x222 mm
Net weight	2.0 kg (4.4 lbs.)
Power supply cord	2.0 m (6.6 ft)

HP1630

710W, Variable Speed, Reversing, 13mm Gear Chuck, Hammer Action

Impact Drill

High power motor.



85 W



Continuous rating input	710W
Capacity	Concrete: 16 mm (5/8")
	Steel: 13 mm (1/2")
	Wood: 30 mm (1-3/16")
Chuck Capacity	1.5 - 13 mm
No Load Speed (RPM)	0 - 3,200
Impacts Per Minute (IPM)	0 - 48,000
Vibration Level	Hammer Drilling into Concrete: 17.0 m/s ²
	Drilling Into Metal: 2.5 m/s ²
Sound Pressure Level	97 dB(A)
Sound Power Level	108 dB(A)
Dimensions (L x W x H)	296x75x204 mm
Net weight	2.1 kg (4.6 lbs.)
Power supply cord	2.0m (6.6 ft)

HP2050

720W, Variable Speed, Reversing, Mechanical 2-speed, Torque Limiter, 13mm Gear Chuck, Hammer Action

Impact Drill

Compact body with durable metal gear housing.



419 W



Continuous rating input	720W
Capacity	Concrete: 20 mm (3/4")
	Steel Hi: 8 mm (5/16")
	Steel Lo: 13 mm (1/2")
	Wood Hi: 25 mm (1")
	Wood Lo: 40 mm (1-9/16")
Chuck Capacity	1.5 - 13 mm
Impacts Per Minute (IPM)	High: 0-58,000 Low: 0-24,000
No Load Speed (RPM)	High: 0-2,900 Low: 0-1,200
Overall Length	362 mm (14-1/4")
Net weight	2.5 kg (5.6 lbs.)
Power supply cord	2.5 m (8.2 ft)

HP2051

720W, Variable Speed, Reversing, Mechanical 2-speed, Torque Limiter, 13mm Keyless Chuck, Hammer Action

Impact Drill



419 W



Continuous rating input	720W
Capacity	Concrete: 20 mm (3/4")
	Steel Hi: 8 mm (5/16")
	Steel Lo: 13 mm (1/2")
	Wood Hi: 25 mm (1")
	Wood Lo: 40 mm (1-9/16")
Chuck Capacity	1.5 - 13 mm
Impacts Per Minute (IPM)	High: 0-58,000 Low: 0-24,000
No Load Speed (RPM)	High: 0-2,900 Low: 0-1,200
Overall Length	360 mm (14-1/8")
Net weight	2.5 kg (5.6 lbs.)
Power supply cord	2.5 m (8.2 ft)

IMPACT DRILLS

HP2010N

750W, Variable Speed, Reversing, Mechanical 2-speed 13mm Gear Chuck, Hammer Action

Impact Drill



- Extra Heavy Duty
- Industrial metal gear housing for long lasting durability



113 mm



Continuous rating input	750W
Capacity	Concrete: 20 mm (3/4") Steel: 13 mm (1/2") Wood: 40 mm (1-9/16")
Chuck Capacity	1.5 - 13mm
Impacts Per Minute (IPM)	High: 0-46,000 Low: 0-18,000
No Load Speed (RPM)	High: 0-2,300 Low: 0-900
Overall Length	350 mm (13-3/4")
Net weight	2.9 kg (6.4 lbs.)
Power supply cord	2.5 m (8.2 ft)

HP2070

1010W, Variable Speed, Reversing, Constant Speed, Mechanical 2-speed 13mm Gear Chuck, Hammer Action

Impact Drill



- Heavy Duty
- High power in a slender & compact body



419 mm



Continuous rating input	1,010W
Capacity	Concrete: 20 mm (3/4") Steel Hi: 8 mm (5/16") Steel Lo: 16 mm (5/8") Wood Hi: 25 mm (1") Wood Lo: 40 mm (1-9/16")
Impacts Per Minute (IPM)	High: 0-58,000 Low: 0-24,000
No Load Speed (RPM)	High: 0-2,900 Low: 0-1,200
Overall Length	364 mm (14-3/8")
Net weight	2.6 kg (5.7 lbs.)
Power supply cord	2.5 m (8.2 ft)

IMPACT DRIVER

TD0101F

230W, Variable Speed, Reversing

Impact Driver



Compact design for perfect handling.



410 mm



Continuous rating input	230W
Capacity	Machine Screw M4 - M8 (5/32" - 5/16") Standard Bolt M5 - M14 (3/16" - 9/16") High Tensile Bolt M5 - M10 (3/16" - 3/8")
Coarse thread (in length)	22 - 90 mm (7/8" - 3-1/2")
Driving Shank (Hex)	6.35 mm (1/4")
Impacts Per Minute (IPM)	0 - 3,200
No Load Speed (RPM)	0 - 3,600
Max Fastening Torque	100 N-m (74 ft.lbs.)
Dimensions (L x W x H)	184x67x192 mm
Net weight	0.99 kg (2.2 lbs.)
Power supply cord	2.5 m (8.2 ft)

IMPACT WRENCHES

TW0200

380W, Variable Speed, Reversing, Carry Case, 200Nm, 2.7 mm Square Drive

Impact Wrench



Aluminium hammer case with high durability.



410 mm



Continuous rating input	380W
Fastening Capacities	Standard Bolt: M10 - M16 (3/8" - 5/8") High Tensile Bolt: M10 - M12 (3/8" - 1/2") Square Drive: 12.7 mm (1/2")
No Load Speed (RPM)	0 - 2,200
Impacts Per Minute (IPM)	0 - 2,200
Max Fastening Torque	200 N-m (150 ft.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 8.5 m/s ²
Sound Pressure Level	93 dB(A)
Sound Power Level	104 dB(A)
Dimensions (L x W x H)	251x72x220 mm
Net weight	2.1 kg (4.7 lbs.)
Power supply cord	2.5 m (8.2 ft)

TW0350

400W, Reversing, Carry Case, 350Nm, 2.7 mm Square Drive

Impact Wrench



Incredibly high torque of 350Nm.



410 mm



Continuous rating input	400W
Fastening Capacities	Standard Bolt: M12 - M22 (1/2" - 7/8") High Tensile Bolt: M12 - M16 (1/2" - 5/8") Square Drive: 12.7 mm (1/2")
No Load Speed (RPM)	2,000
Impacts Per Minute (IPM)	2,000
Max Fastening Torque	350 N-m (260 ft.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 11.5 m/s ²
Sound Pressure Level	93 dB(A)
Sound Power Level	104 dB(A)
Dimensions (L x W x H)	283x87x233 mm
Net weight	3 kg (6.6 lbs.)
Power supply cord	2.5 m (8.2 ft)

* There is limited stock on some of the models. Please confirm availability.

IMPACT WRENCHES

6906

620W, Reversing, Carry Case, 588Nm, 19mm Square Drive

Impact Wrench

Powerful torque for super duty applications.



105



Continuous rating input	620W
Capacity	
Standard Bolt	M16 - M22 (5/8" - 7/8")
High Tensile Bolt	M16 - M20 (5/8" - 3/4")
Square Drive	19 mm (3/4")
No Load Speed (RPM)	1,700
Impacts Per Minute (IPM)	1,600
Max Fastening Torque	588 N-m (441 ft.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 16.5 m/s ²
Sound Pressure Level	98 dB(A)
Sound Power Level	109 dB(A)
Overall Length	327 mm (12-7/8")
Net weight	5.6 kg (12.2 lbs.)
Power supply cord	2.5 m (8.2 ft)

TW1000

1,200W, Reversing, Carry Case, 1000Nm, 25.4mm Square Drive

Impact Wrench

Robust high torque impact wrench for heavy-duty applications.



155



Continuous rating input	1,200W
Capacity	
Standard Bolt	M24 - M30 (1 1/2" - 1 1/4")
High Tensile Bolt	M22 - M24 (7/8" - 1 1/16")
Square Drive	25.4 mm (1")
No Load Speed (RPM)	1,400
Impacts Per Minute (IPM)	1,500
Max Fastening Torque	1,000 N-m (738 ft.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 17.5 m/s ²
Sound Pressure Level	103 dB(A)
Sound Power Level	114 dB(A)
Overall Length	382x110x290 mm
Net weight	8.8 kg (19.4 lbs.)
Power supply cord	2.5 m (8.2 ft)

JIG SAWS

4329K

450W, Variable Speed, Orbital Cutting, Bayonet Shank, Dust Collecting

Jig Saw

Medium duty model with 450W continuous input.



63



Continuous rating input	450W
Max Cutting Capacity at 90°	Wood: 65 mm (2-9/16") Steel: 6 mm (1/4")
Length of Stroke	18 mm (11/16")
Strokes Per Minute (SPM)	500 - 3,100
Vibration Level	Cutting Wood: 7.0 m/s ² Cutting Sheet Metal: 5.0 m/s ²
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Overall Length	223x77x197 mm (8-3/4"x3"x7-3/4")
Net weight	1.9 kg (4.2 lbs.)
Power supply cord	2.0 m (6.6 ft)

JV0600K

650W, Variable Speed, Orbital Cutting, Bayonet Shank, Dust Collecting

Jig Saw

- 3 Orbital settings and straight cutting
- Toolless blade change system



63



Continuous rating input	650W
Capacity	Wood: 90 mm (3-1/2") Steel: 10 mm (3/8")
Length of Stroke	23 mm (7/8")
Strokes Per Minute (SPM)	500 - 3,100
Dimensions (L x W x H)	236x77x199 mm
Net weight	2.4 kg (5.3 lbs.)
Power supply cord	2.5 m (8.2 ft)

4350FCT

720W, Variable Speed, Orbital Cutting, Bayonet Shank, Constant Speed, Soft Start, Dust Collecting

Jig Saw

- Electronic control and speed dial
- Toolless blade change system



419



Continuous rating input	720W
Capacity	Wood: 135 mm (5-5/16") Steel: 10 mm (3/8")
Length of Stroke	26 mm (1")
Strokes Per Minute (SPM)	800 - 2,800
Dimensions (L x W x H)	236x77x207 mm
Net weight	2.7 kg (5.8 lbs.)
Power supply cord	2.5 m (8.2 ft)

RECIPRO SAWS

JR3061T

1250W, Variable Speed, Bayonet Shank

Recipro Saw



- Load by balancer rotation force enables firm cutting
- Minimizes blade deflection from aiming point especially in metal cutting



304



Continuous rating input	1,250W
Length of Stroke	32 mm (1-1/4")
Strokes Per Minute (SPM)	0 - 3,000
Capacity	Pipe : 130 mm (5-1/8") Wood: 255 mm (10")
Vibration Level	Cutting Boards: 18.5 m/s ² Cutting Wooden Beams: 16.5 m/s ²
Sound Pressure Level	88 dB(A)
Sound Power Level	99 dB(A)
Dimensions (L x W x H)	487 x 95 x 177 mm (19-3/16 x 3-3/4 x 7")
Net weight	3.8 kg (8.4 lbs.)
Power supply cord	2.5 m (8.2 ft)

JR3070CT

1510W, Variable Speed, Orbital Cutting, Bayonet Shank, Constant Speed

Recipro Saw



Extra-low vibration and extra power.



304



Continuous rating input	1,510W
Length of Stroke	32 mm (1-1/4")
Strokes Per Minute (SPM)	0 - 2,800
Capacity	Pipe : 130 mm (5-1/8") Wood: 255 mm (10")
Vibration Level	Cutting Boards: 9.5 m/s ² Cutting Wooden Beams: 10.5 m/s ²
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Overall Length	485 mm (19-1/8")
Net weight	4.6 kg (10 lbs.)
Power supply cord	2.5 m (8.2 ft)

LASER LEVELS & DISTANCE MEASURES

LD050P

Laser Distance Measure



Multiple measurement functions for increased versatility of applications.

STANDARD EQUIPMENT:
Pouch, strap, 2 x AAA batteries.



Measuring Range	0.05-50m
Typical Measuring Tolerance	± 2.0mm / 10m
Max Measuring Tolerance	± 3.0mm / 10m
Laser Point	6mm at 10m
Laser Class	2
Laser Type	635nm, <1 mW
Protection Class	Ip54
Power Supply	Cell battery: AAA1.5 V x 2pcs
Net Weight	0.1 kg (0.22 lbs)

LD080PI

Laser Distance Measure



Achieve the accuracy of a pro with top-class accuracy for maximum precision.

STANDARD EQUIPMENT:
Pouch, strap, 2 x AAA batteries.



Measuring Range	0.05-80m
Typical Measuring Tolerance	± 1.5mm / 10m
Max Measuring Tolerance	± 2.5mm / 10m
Laser Point	6mm at 10m
Laser Class	2
Laser Type	635nm, <1 mW
Protection Class	Ip54
Power Supply	Cell battery: AAA1.5 V x 2pcs
Net Weight	0.14 kg (0.31 lbs)

NIBBLERS & SHEARS

JN1601

550W, Metal Working Nibbler, 1.6 mm (16Ga)

Nibbler



Precise, burr-free curved and straight cuts.



410



Continuous rating input	550W
Capacity	Steel up to 400 N/mm ² : 1.6 mm Steel up to 600 N/mm ² : 1.2 mm Steel up to 800 N/mm ² : 0.8 mm Aluminium up to 200 N/mm ² : 2.5 mm
Min. cutting radius	Outside edge : 50 mm (2") Inside edge : 45 mm (1-3/4")
Strokes Per Minute (SPM)	2,200
Overall Length	261 mm (10-1/4")
Net weight	1.6 kg (3.6 lbs.)
Power supply cord	2.0 m (6.6 ft)

* There is limited stock on some of the models. Please confirm availability.

NIBBLERS & SHEARS

JN3201J

710W, Metal Working Nibbler, Carry Case. 3.2 mm (10Ga)

Nibbler



Robust design with elastomer coated handle provides easy operation.



304 mm



Continuous rating input	710W
Capacity	
Steel up to 400 N/mm ²	3.2 mm
Steel up to 600 N/mm ²	2.5 mm
Steel up to 800 N/mm ²	1.0 mm
Aluminium up to 200 N/mm ²	3.5 mm
Min. cutting radius	Outside edge : 128 mm (5-1/16") Inside edge : 120 mm (4-3/4")
Strokes Per Minute (SPM)	1,300
Dimensions (LxWxH)	225x90x254 mm
Net weight	3.4 kg (7.4 lbs.)
Power supply cord	2.5 m (8.2 ft)

JS1601

380W, Metal Straight Shear 1.6mm (16Ga)

Metal Straight Shear



Ingenious aesthetic design provides more control and manoeuvrability.



459 mm



Continuous rating input	380W
Capacity	
Steel up to 400 N/mm ²	1.6 mm
Steel up to 600 N/mm ²	1.2 mm
Steel up to 800 N/mm ²	0.8 mm
Aluminium up to 200 N/mm ²	2.5 mm
Min. cutting radius	250 mm (9-7/8")
Strokes Per Minute (SPM)	4,500
Dimensions (LxWxH)	320x70x78 mm
Net weight	1.4 kg (3.2 lbs.)
Power supply cord	2.5 m (8.2 ft)

JS1602

380W Metal Shear 1.6mm (16Ga)

Metal Shear



Ingenious aesthetic design provides more control and manoeuvrability.



459 mm



Continuous rating input	380W
Capacity	
Steel up to 400 N/mm ²	1.6 mm
Steel up to 600 N/mm ²	1.2 mm
Steel up to 800 N/mm ²	0.8 mm
Aluminium up to 200 N/mm ²	2.5 mm
Min. cutting radius	30 mm (1-3/16")
Strokes Per Minute (SPM)	4,000
Dimensions (LxWxH)	255x74x146 mm
Net weight	1.6 kg (3.4 lbs.)
Power supply cord	2.5 m (8.2 ft)

JS3201J

710W, 3.2mm Shear, Carry Case

Shear



Robust design with elastomer coated handle provides easy operation.



303 mm



Continuous rating input	710W
Capacity	
Steel up to 400 N/mm ²	3.2 mm
Steel up to 600 N/mm ²	2.5 mm
Steel up to 800 N/mm ²	1.5 mm
Aluminium up to 200 N/mm ²	4.0 mm
Min. cutting radius	50 mm (2")
Strokes Per Minute (SPM)	1,600
Dimensions (LxWxH)	213x90x239 mm
Net weight	3.4 kg (7.5 lbs.)
Power supply cord	2.5 m (8.2 ft)

PLANERS

KP0800K

620W, Dust Collecting, Carry Case

Planer



- New aesthetic design incorporating safety foot
- Reversible mini TCT blades



410 mm



Continuous rating input	620W
Rebate	9 mm
Planing Width	82 mm (3-1/4")
Planing Depth	2.5 mm (3/32")
No Load Speed (RPM)	17,000
Dimensions (L x W x H)	285x158x158 mm (11-1/4"x6-1/4"x6-1/4")
Net weight	2.8 kg (6.2 lbs.)
Power supply cord	2.5 m (8.2 ft)

KP0810K

850W, Dust Collecting, Carry Case

Planer



- Lightweight design for easy handling
- Reversible mini TCT blades



132 mm



Continuous rating input	850W
Rebate	25 mm
Planing Width	82 mm (3-1/4")
Planing Depth	4 mm (5/32")
Rebate	25 mm (1")
No Load Speed (RPM)	16,000
Dimensions (L x W x H)	290x168x176 mm (11-3/8"x6-5/8"x6-15/16")
Net weight	3.3 kg (7.3 lbs.)
Power supply cord	2.5 m (8.2 ft)

THICKNESSER

2012NB

1650W, Dust Collecting

Thicknesser

4-Post design and diagonal cross supports for stability.



Continuous rating input	1,650W
Cutting Width	304 mm (12")
Cutting depth	Cutting width 0-150 mm : 3 mm (1/8")
	Cutting width 150-240 mm : 1.5 mm (1/16")
Feed rate/min.	8.5 m (27.9 ft)
Table Size (W x L)	304 x 771 mm (12" x 30-3/8")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	483x771x401 mm
Net weight	27.1 - 27.6 kg (59.7 - 60.9 lbs.)
Power supply cord	2.5 m (8.2 ft)


RANDOM ORBIT & FINISHING SANDERS

TM3000CX2

320W, Variable Speed, Constant Speed, Soft Start, Carry Case

Multi Tool

With oscillating multi tool accessories.




Continuous rating input	320W
Strokes Per Minute (SPM)	6,000-20,000
Dimensions (L x W x H)	275x64x92 mm (10-7/8"x2-1/2"x3-5/8")
Net weight	1.4 - 1.5 kg (3.2 - 3.3 lbs.)
Power supply cord	5.0 m (16.4 ft)

BO4555

200W, 1/4 Sheet, Dust Collecting

Palm Sander

Powerful motor with low vibration & low noise.




Continuous rating input	200W
Pad Size	112 x 102 mm (4-3/8" x 4")
Abrasive Paper Size	114 x 102 mm (4-1/2" x 4")
Orbits Per Minute (OPM)	14,000
Dimensions (L x W x H)	131x112x141 mm (5-1/8"x4-3/8"x5-9/16")
Net weight	1.1 kg (2.5 lbs.)
Power supply cord	2.0 m (6.6 ft)

BO3710

190W, 1/3 Sheet, Dust Collecting

Finishing Sander

Powerful motor with low vibration & low noise.




Continuous rating input	190W
Pad Size	93 x 185 mm (3-5/8" x 7-1/4")
Abrasive Paper Size	93 x 228 mm (3-5/8" x 9")
Orbits Per Minute (OPM)	11,000
Strokes Per Minute (SPM)	22,000
Orbit Diameter	2.0 mm (1/16")
Vibration Level	Sanding Metal Plate: 3.5 m/s ²
Sound Pressure Level	72 dB(A)
Dimensions (L x W x H)	253x92x154 mm (10"x3-5/8"x6-1/16")
Net weight	1.6 kg (3.5 lbs.)
Power supply cord	2.0 m (6.6 ft)

BO4900

330W, 1/2 Sheet, Dust Collecting

Finishing Sander

Minimized vibration for reduced operator fatigue.



Continuous rating input	330W
Pad Size	115 x 229 mm (4-1/2" x 9")
Abrasive Paper Size	115 x 232 mm (4-1/2" x 9-1/8")
Orbits Per Minute (OPM)	10,000
Overall Length	289 mm (11-3/8")
Net weight	2.9 kg (6.4 lbs.)
Power supply cord	2.5 m (8.2 ft)

* There is limited stock on some of the models. Please confirm availability.

RANDOM ORBIT & FINISHING SANDERS

9046

600W, 1/2 Sheet, Dust Collecting

Finishing Sander

Powerful performance for pro's needs.



419 mm



Continuous rating input	600W
Pad Size	115 x 229 mm (4-1/2" x 9")
Abrasive Paper Size	115 x 280 mm (4-1/2" x 11")
Orbits Per Minute (OPM)	6,000
Overall Length	283 mm (11-1/8")
Orbit Diameter	5 mm (3/16")
Net weight	3.1 kg (6.8 lbs.)
Power supply cord	2.5 m (8.2 ft)

BO5031

300W, 125mm, Dust Collecting, Variable Speed, Hook & Loop

Random Orbital Sander

Powerful performance for pro's needs.



419 mm



Continuous rating input	300W
Pad Diameter	123 mm (4-7/8")
Abrasive Disc Size	125 mm (5")
Orbits Per Minute (OPM)	4,000-12,000
Dimensions (L x W x H)	153x123x153 mm (6"x4-7/8"x6")
Net weight	1.3 kg (3 lbs.)
Power supply cord	2.0 m (6.6 ft)

BO5041

300W, 125mm, Dust Collecting, Variable Speed, Hook & Loop

Random Orbital Sander

Ergonomically designed body and rotatable front grip.



64 mm



Continuous rating input	300W
Pad Diameter	123 mm (4-7/8")
Abrasive Disc Size	125 mm (5")
Orbits Per Minute (OPM)	4,000-12,000
Dimensions (L x W x H)	218x123x153mm (8-5/8"x4-7/8"x6")
Net weight	1.4 kg (3.1 lbs.)
Power supply cord	2.0 m (6.6 ft)

BO6030

310W, Variable Speed, Dust Collecting, Hook & Loop

Random Orbital Sander

Exceptionally low vibration, yet aggressive sanding.



419 mm



Continuous rating input	310W
Pad Diameter	150 mm (6")
Abrasive Disc Size	150 mm (6")
Orbits Per Minute (OPM)	4,000-10,000
Overall Length	309 mm (12-1/8")
Overall Diameter	3.0 mm (1/8")
Net weight	2.4 kg (5.2 lbs.)
Power supply cord	2.5 m (8.2 ft)

BO6050J

750W, Variable Speed, Dust Collecting, Soft Start, Constant Speed

Random Orbital Sander

Two finishing modes:
1 - Finishing sanding and buffing
2 - Sanding and polishing



325 mm



Continuous rating input	750W
Pad diameter	150 mm (6")
Abrasive Disc Size	150 mm (6")
Orbits Per Minute (OPM)	1,600 - 6,800
Sanding Strokes Per Minute (SPM)	3,200 - 13,600
Pad speed in Roto-orbit mode (rpm)	140 - 600
Orbit Diameter	5.5 mm (7/32")
Vibration Level	Sanding Metal Plate: 5.0 m/s ²
	Polishing: 3.0 m/s ²
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions (L x W x H)	330x155x145 mm
Net weight	2.6 kg (5.7 lbs.)
Power supply cord	2.5 m (8.2 ft)

SANDER POLISHER

9237CB

1200W, Variable Speed, Constant Speed, Soft Start

Sander Polisher

Variable speed control by dial rotation speed is adjustable to application.



304 mm



Continuous rating input	1,200W
Capacity	Wool Pad: 180 mm (7") Wool Bonnet: 180 mm (7")
No Load Speed (RPM)	0 - 3,200
Vibration Level	2.5 m/s ² or less
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	431x198x187 mm
Net weight	3.2 - 3.4 kg (7 - 7.5 lbs.)
Power supply cord	2.5 m (8.2 ft)

ROTARY HAMMERS

HR2230

22mm, 710W, Variable Speed, Reversing, Torque Limiter, SDS-Plus, Carry Case, 2.2 Joules

Rotary Hammer



2 Operation modes

Highly durable mechanical parts, motor and carbon brushes.



325 mm



Continuous rating input	710W
Capacity	Concrete (w/ Core Bit): 54 mm (2-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,050
No Load Speed (RPM)	0 - 1,050
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Vibration Level	Hammer Drilling into Concrete: 15 m/s ²
Dimensions (L x W x H)	357x84x214 mm
Net weight	2.6 - 3.1 kg (5.8 - 6.8 lbs.)
Power supply cord	2.5 m (8.2 ft)

HR2300

23mm, 720W, Variable Speed, Reversing, Torque Limiter, SDS-Plus, Carry Case, 2.3 Joules

Rotary Hammer



2 Operation modes



325 mm



Continuous rating input	720W
Capacity	Concrete (w/ Core Bit): 68 mm (2-11/16") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,600
No Load Speed (RPM)	0 - 1,200
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Vibration Level	Hammer Drilling into Concrete: 15.5 m/s ²
Dimensions (L x W x H)	356x77x209 mm
Net weight	2.7 - 3.1 kg (5.9 - 6.9 lbs.)
Power supply cord	2.5 m (8.2 ft)

HR2460

24mm, 780W, Variable Speed, Reversing, Torque Limiter, SDS-Plus, Carry Case, 2.4 Joules

Rotary Hammer



2 Operation modes

Same speed and torque in reverse rotation.



325 mm



Continuous rating input	780W
Capacity	Concrete: 24 mm (15/16") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,500
No Load Speed (RPM)	0 - 1,100
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Vibration Level	Hammer Drilling into Concrete: 15.5 m/s ²
Dimensions (L x W x H)	362x84x214 mm
Net weight	2.8 - 3.2 kg (6.1 - 7.0 lbs.)
Power supply cord	2.5 m (8.2 ft)

HR2470

24mm, 780W, Variable Speed, Reversing, Torque Limiter, SDS-Plus, Carry Case, 2.4 Joules

Rotary Hammer



3 Operation modes

One-touch sliding chuck for easy bit change.



325 mm



Continuous rating input	780W
Capacity	Concrete: 24 mm (15/16") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,500
No Load Speed (RPM)	0 - 1,100
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Vibration Level	Hammer Drilling into Concrete: 15.5 m/s ² Drilling Into Metal: 4.5 m/s ²
Dimensions (L x W x H)	370x84x214 mm
Net weight	2.9 - 3.3 kg (6.4 - 7.3 lbs.)
Power supply cord	4.0 m (13.1 ft)

HR2470T

24mm, 780W, Variable Speed, Reversing, Torque Limiter, SDS-Plus, Carry Case, 2.4 Joules

Rotary Hammer



3 Operation modes

Quick change drill chuck.



Quick change



325 mm



Continuous rating input	780W
Capacity	Concrete: 24 mm (15/16") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,500
No Load Speed (RPM)	0 - 1,100
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Vibration Level	Hammer Drilling into Concrete: 15.5 m/s ² Drilling Into Metal: 4.5 m/s ²
Dimensions (L x W x H)	394x84x214 mm
Net weight	3.0 - 3.3 kg (6.7 - 7.3 lbs.)
Power supply cord	4.0 m (13.1 ft)

HR2475

24mm, 780W, Variable Speed, Reversing, Torque Limiter, SDS-Plus, Carry Case, 2.3 Joules

Rotary Hammer



3 Operation modes

- Spade handle design for heavy duty applications
- Minimizes hand fatigue



419 mm



Continuous rating input	780W
Capacity	Concrete: 24 mm (15/16") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,500
No Load Speed (RPM)	0 - 1,100
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Vibration Level	Hammer Drilling into Concrete: 15.5 m/s ²
Dimensions (L x W x H)	429x84x158 mm
Net weight	3.0 - 3.4 kg (6.6 - 7.6 lbs.)
Power supply cord	4.0 m (13.1 ft)

* Although Rotary Hammers are portrayed with a bit they are sold without bits.
* There is limited stock on some of the models. Please confirm availability.

ROTARY HAMMERS

HR2600

Rotary Hammer



26mm, 800W, Variable Speed, Reversing, Torque Limiter, SDS-Plus, Carry Case, 2.4 Joules

2 Operation modes

Operation mode change lever positioned on the bottom of gear housing for reduced possibility of breakage.



Continuous rating input	800W
Capacity	Concrete (w/ TCT Bit): 26 mm (1")
	Concrete (w/ Diamond Core Bit): 80 mm (3-1/8")
	Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,600
No Load Speed (RPM)	0 - 1,200
Sound Pressure Level	91 dB(A)
Sound Power Level	102 dB(A)
Vibration Level	Hammer Drilling into Concrete: 15.5 m/s ²
Dimensions (L x W x H)	361x77x209 mm (14-1/4"x3"x8-1/4")
Net weight	3 - 3.4 kg (6.5 - 7.5 lbs.)
Power supply cord	2.5 m (8.2 ft)

HR2630

Rotary Hammer



26mm, 800W, Variable Speed, Reversing, Torque Limiter, SDS-Plus, Carry Case, 2.4 Joules

3 Operation modes

Easy-to-grip handle ergonomically designed for maximum power thrust.



Continuous rating input	800W
Capacity	Concrete: 26 mm (1")
	Steel: 13 mm (1/2")
	Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,600
No Load Speed (RPM)	0 - 1,200
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Vibration Level	Hammer Drilling into Concrete: 15.0 m/s ²
Dimensions (L x W x H)	385x77x209 mm
Net weight	2.8 - 3.3 kg (6.3 - 7.2 lbs.)
Power supply cord	2.5 m (8.2 ft)

HR2631F

Rotary Hammer



26mm, 800W, Variable Speed, Reversing, Torque Limiter, SDS-Plus, Carry Case, Job Light, 2.4 Joules

3 Operation modes

- Features a built-in LED job light
- Anti-Vibration-Technology



Continuous rating input	800W
Capacity	Concrete: 26 mm (1")
	Steel: 13 mm (1/2")
	Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,600
No Load Speed (RPM)	0 - 1,200
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Vibration Level	Hammer Drilling into Concrete: 12.0 m/s ²
Dimensions (L x W x H)	361x77x209 mm
Net weight	2.9 - 3.4 kg (6.4 - 7.4 lbs.)
Power supply cord	2.5 m (8.2 ft)

HR2810

Rotary Hammer



28mm, 800W, Variable Speed, Reversing, Torque Limiter, SDS-Plus, Carry Case, 2.8 Joules

3 Operation modes

Most efficient in its class for both drilling & chipping.



Continuous rating input	800W
Capacity	Concrete (w/ TCT Bit):
	28 mm (1-1/8") Steel: 13 mm (1/2")
	Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,500
No Load Speed (RPM)	0 - 1,100
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Vibration Level	Hammer Drilling into Concrete: 20 m/s ²
Dimensions (L x W x H)	314x89x225 mm
Net weight	3.4 - 3.8 kg (7.5 - 8.5 lbs.)
Power supply cord	2.5 m (8.2 ft)

HR3200C

Rotary Hammer



32mm, 850W, Variable Speed, Torque Limiter, SDS-Plus, Carry Case, Constant Speed, Soft Start, 5.1 Joules

3 Operation modes

Lightweight design featuring low vibration levels.



Continuous rating input	850W
Capacity	Concrete (w/ TCT Bit):
	32 mm (1-1/4") Steel: 13 mm (1/2")
	Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	1,650 - 3,300
No Load Speed (RPM)	315 - 630
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Vibration Level	Hammer Drilling into Concrete: 18.0 m/s ²
Dimensions (L x W x H)	398x108x239 mm
Net weight	4.8 - 5.2 kg (10.5 - 11.5 lbs.)
Power supply cord	5.0 m (16.4 ft)

HR4002

Rotary Hammer



40mm, 1050W, Torque Limiter, SDS-Max, Carry Case, 6.1 Joules

2 Operation modes

Lightweight design featuring low vibration levels.



Continuous rating input	1,050W
Capacity	Concrete (w/ TCT Bit): 40 mm (1-9/16")
	Concrete (w/ Core Bit): 105 mm (4-1/8")
Blows Per Minute (BPM)	2,500
No Load Speed (RPM)	680
Sound Pressure Level	92 dB(A)
Sound Power Level	103 dB(A)
Vibration Level	Hammer Drilling into Concrete: 17.5 m/s ²
Dimensions (L x W x H)	458x114x256 mm
Net weight	6.6 - 6.8 kg (14.6 - 15.0 lbs.)
Power supply cord	5.0 m (16.4 ft)

ROTARY HAMMERS

HR4003C

40mm, 1100W, Variable Speed, Constant Speed, Torque Limiter, SDS-Max, Soft Start, Carry Case, 8.3 Joules

Rotary Hammer



2 Operation modes

- Hammering with rotation (for drilling)
- Hammering only (for chipping & breaking)
- Most powerful and efficient in the class



350



Continuous rating input	1,100W
Capacity	Concrete (w/ TCT Bit): 40 mm (1-9/16")
	Concrete (w/ Core Bit): 105 mm (4-1/8")
Blows Per Minute (BPM)	1,450 - 2,900
No Load Speed (RPM)	250 - 500
Sound Pressure Level	92 dB(A)
Sound Power Level	103 dB(A)
Vibration Level	Hammer Drilling into Concrete: 10.0 m/s ²
Dimensions (L x W x H)	479x106x263 mm
Net weight	6.2 - 6.4 kg (13.7 - 14.1 lbs.)
Power supply cord	5.0 m (16.4 ft)

HR4013C

40mm, 1100W, Variable Speed, Constant Speed, Torque Limiter, SDS-Max, Soft Start, Carry Case, 8.0 Joules

Rotary Hammer



2 Operation modes

- Hammering with rotation (for drilling)
- Hammering only (for chipping & breaking)
- Soft no load function



350



Continuous rating input	1,100W
Capacity	Concrete (w/ TCT Bit): 40 mm (1-9/16")
	Concrete (w/ Core Bit): 105 mm (4-1/8")
Blows Per Minute (BPM)	1,450 - 2,900
No Load Speed (RPM)	250 - 500
Sound Pressure Level	92 dB(A)
Sound Power Level	103 dB(A)
Vibration Level	Hammer Drilling into Concrete: 10.0 m/s ²
Dimensions (L x W x H)	479x106x263 mm
Net weight	6.8 - 6.9 kg (13.7 - 14.1 lbs.)
Power supply cord	5.0 m (16.4 ft)

HR5212C

52mm, 1510W, Variable Speed, Constant Speed, Torque Limiter, SDS-Max, Soft Start, Carry Case, 20 Joules

Rotary Hammer



2 Operation modes

- Hammering with rotation (for drilling)
- Hammering only (for chipping & breaking)
- High efficiency and unrivalled low levels of vibration



350



Continuous rating input	1,510W
Capacity	Concrete (w/ TCT Bit): 52 mm (2")
	Concrete (w/ Core Bit): 160 mm (6-5/16")
Blows Per Minute (BPM)	1,100 - 2,250
No Load Speed (RPM)	150 - 310
Sound Pressure Level	98 dB(A)
Sound Power Level	109 dB(A)
Vibration Level	Hammer Drilling into Concrete: 9.0 m/s ²
Dimensions (L x W x H)	599x140x287 mm
Net weight	11.9 - 12.0 kg (26.2 - 26.5 lbs.)
Power supply cord	5.0 m (16.4 ft)

ROUTERS

RP0900

900W, Plunge Type 6.35mm

Router



Highly durable and well designed.



113



Continuous rating input	900W
Collet Capacity	6 mm, 8 mm or 1/4", 3/8"
Plunge Capacity	0 - 35 mm (0 - 1-3/8")
No Load Speed (RPM)	27,000
Vibration Level	Cutting Grooves in MDF: 4.0 m/s ²
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Dimensions (L x W x H)	110x256x217 mm
Net weight	2.7 kg (6 lbs.)
Power supply cord	2.5 m (8.2 ft)

RP1800X

1850W, Plunge Type 12.7mm

Router



Ergonomically contoured handles for comfortable operation.



203



Continuous rating input	1,850W
Collet Capacity	12 mm or 1/2"
Plunge Capacity	0 - 70 mm (0 - 2-3/4")
Base Diameter	170 mm (6-11/16")
No Load Speed (RPM)	22,000
Vibration Level	Cutting Grooves in MDF: 4.0 m/s ²
Sound Pressure Level	86 dB(A)
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	155x294x312 mm
Net weight	6 kg (13.2 lbs.)
Power supply cord	4.0 m (13.1 ft)


RP2301FCX

2100W, Variable Speed, Brake, Constant Speed, Soft Start, Dust Collecting, Built-in Light 12.7mm

Router



Linear ball bearing for super-smooth plunge action.



204



Continuous rating input	2,100W
Collet Capacity	12 mm or 1/2"
Plunge Capacity	0 - 70 mm (0 - 2-3/4")
No Load Speed (RPM)	9,000 - 22,000
Vibration Level	Cutting Grooves in MDF: 4.5 m/s ²
Sound Pressure Level	87 dB(A)
Sound Power Level	98 dB(A)
Dimensions (L x W x H)	155x294x312 mm (6-1/8"x11-5/8"x12-1/4")
Net weight	6.1 kg (13.5 lbs.)
Power supply cord	4.0 m (13.1 ft)



* Although Rotary Hammers are portrayed with a bit they are sold without bits.
* There is limited stock on some of the models. Please confirm availability.


TRIMMERS







RT0700C

710W, Variable Speed, Constant Speed, Soft Start, Dust Collecting

Trimmer



410 






Continuous rating input	710W
Collet Capacity	6.35mm
No Load Speed (RPM)	10,000 - 30,000
Vibration Level	Rotation w/o Load: 2.5 m/s ² or less Cutting Grooves in MDF: 3.5 m/s ²
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions (L x W x H)	89x89x200 mm
Net weight	1.8 - 2.7 kg (3.9 - 6.0 lbs.)
Power supply cord	2.5 m (8.2 ft.)







RT0700CX2J

710W, Variable Speed, Constant Speed, Soft Start, Dust Collecting, Carry Case

Trimmer Kit



410 



Continuous rating input	710W
Collet Capacity	6.35mm
No Load Speed (RPM)	10,000 - 30,000
Vibration Level	Rotation w/o Load: 2.5 m/s ² or less Cutting Grooves in MDF: 3.5 m/s ²
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions (L x W x H)	89x89x200 mm
Net weight	1.8 - 2.7 kg (3.9 - 6.0 lbs.)
Power supply cord	2.5 m (8.2 ft.)

RT0700CX2J TRIMMER KIT



POWER
710W

SCREWDRIVERS

FS2300

570W, Variable Speed, Reversing, Built-in Light, Drywall for Timber Struts

Screwdriver



Silent Clutch.



Continuous rating input	570W
Capacity	Drywall Screw: 5 mm (3/16") Self-Drilling Screw: 6 mm (1/4")
Driving Shank (Hex)	6.35 mm (1/4")
No Load Speed (RPM)	0 - 2,500
Vibration Level	Screwdriving w/o Impact: 2.5 m/s ² or less
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	290x70x207 mm
Net weight	1.6 kg (3.5 lbs.)
Power supply cord	2.5 m (8.2 ft.)


FS4300

570W, Variable Speed, Reversing, Built-in Light, Drywall for Aluminium Struts

Screwdriver



Silent Clutch.



Continuous rating input	570W
Capacity	Drywall Screw: 5 mm (3/16") Self-Drilling Screw: 6 mm (1/4")
Driving Shank (Hex)	6.35 mm (1/4")
No Load Speed (RPM)	0 - 4,000
Vibration Level	Screwdriving w/o Impact: 2.5 m/s ² or less
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions (L x W x H)	279x65x207 mm
Net weight	1.4 kg (3.1 lbs.)
Power supply cord	2.5 m (8.2 ft.)

FS6300

570W, Variable Speed, Reversing, Built-in Light, Drywall for Steel Struts

Screwdriver



Silent Clutch.



Continuous rating input	570W
Capacity	Drywall Screw: 4 mm (5/32") Self-Drilling Screw: 6 mm (1/4")
Driving Shank (Hex)	6.35 mm (1/4")
No Load Speed (RPM)	0 - 6,000
Vibration Level	Screwdriving w/o Impact: 2.5 m/s ² or less
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions (L x W x H)	279x65x207 mm
Net weight	1.4 kg (3.1 lbs.)
Power supply cord	2.5 m (8.2 ft.)

FS2500

570W, Variable Speed, Reversing, Built-in Light, Drywall for Tekes and Roofing

Screwdriver



One touch locator.



Continuous rating input	570W
Capacity	Drywall Screw: 5 mm (3/16") Self-Drilling Screw: 6 mm (1/4")
Driving Shank (Hex)	6.35 mm (1/4")
No Load Speed (RPM)	0 - 2,500
Vibration Level	Screwdriving w/o Impact: 2.5 m/s ² or less
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	280x70x207 mm
Net weight	1.5 kg (3.4 lbs.)
Power supply cord	2.5 m (8.2 ft.)

FS2700

570W, Variable Speed, Reversing, Built-in Light, Drywall for Combination (Clutch Type)

Screwdriver



6-Stage torque adjustment.



Continuous rating input	570W
Capacity	Self-Drilling Screw: 6 mm (1/4") Machine Screw: 8 mm (5/16") Wood Screw: 6.2 mm (1/4")
Driving Shank (Hex)	6.35 mm (1/4")
No Load Speed (RPM)	0 - 2,500
Vibration Level	Screwdriving w/o Impact: 2.5 m/s ² or less
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	301x70x207 mm
Net weight	1.8 kg (4 lbs.)
Power supply cord	2.5 m (8.2 ft.)

* There is limited stock on some of the models. Please confirm availability.

PRODUCTS

OUTDOOR POWER EQUIPMENT



-  Double Insulation
-  Brake
-  Torque Limiter
-  Electronic 2-Speed
-  Soft Start
-  Anti Vibration
-  Automatic Oiling
-  Chain Brake
-  Primer Pump
-  Capacitor Discharge Ignition
-  Electronic Ignition
-  Dust Collection
-  Decompression Valve
-  Auto Decompression
-  Rapid Start

DUB185Z

Cordless Blower



18V LXT Li-Ion Cordless Variable 3-Speed Blower

- Variable speed (0-18,000 RPM) for optimum speed control
- Compact and ergonomic design at only 280 mm long
- Lightweight for reduced operator fatigue
- Rubberised soft grip handle for increased operator comfort




Air Pressure	5.8 kPa (550 mmHg)
No Load Speed (RPM)	0-18,000
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Vibration Level	2.5 m/s ²
Dimensions (L x W x H)	525x155x212 mm (20-3/4"x6-1/8"x8-3/8")
Net weight	1.6 kg (3.7 lbs.)

DUB186Z

Cordless Blower



- Long blowing nozzle with curved tip for optimal blowing performance
- 3 Air volume setting (high/medium/low)
- Variable speed (0-18,000 RPM) for optimum speed control
- Ergonomically designed handle with rubberised soft grip
- Optimum grip-to-frame angle



Air volume	3.2m ³ /min
Air speed	68 m/s
No Load Speed (RPM)	0-18,000
Sound Pressure Level	82.5 dB(A)
Sound Power Level	92.4 dB(A)
Vibration Level	2.5 m/s ²
Overall Length	861mm
Net weight	1.6 - 2.1 kg

*Cannot be used as vacuum cleaner

DUB184Z

Cordless Blower



18V LXT BL Brushless Cordless Variable Speed Blower

- Ideal for clearing fallen leaves on pavement, grass and hedge clippings or other light debris
- Efficient clearing thanks to a high-efficiency axial fan similar to that of 18Vx2 LXT model DUB362
- Variable speed control by trigger, with cruise control lever for lock-on operation
- BL motor delivers up to 52.1 m/s and 13.0 m³/min
- Compact and lightweight for single handed operation



Max Air Volume	13.0 m ³ /min (459 CFM)
Max Air Velocity	52.1 m/s (116 MPH)
No Load Speed (RPM)	0 - 18,000
Blowing Force	10.9 N
Sound Pressure Level	86.6 dB(A)
Sound Power Level	93.5 dB(A)
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 825x160x285 mm (32-1/2"x6-5/16"x11-1/4")
Net weight	2.5 - 3.0 kg (5.4 - 6.7 lbs.)

DUB361Z

Cordless Blower



18V X2 (36V) LXT Li-Ion Cordless 2-Speed Blower

- Delivers up to 73 minutes of run time using two 4.0Ah 18V LXT batteries on low speed setting
- Makita-built motor produces a maximum air velocity of 93 m/s
- 2-Speed (10,000 & 17,000 RPM) design for optimum speed control
- Compact and lightweight for single handed operation
- Push button air volume selection (High / Low settings)



Max Air Volume	High: 4.4 m ³ /min (155 CFM) Low: 2.6 m ³ /min (92 CFM)
Max Air Velocity	High: 93 m/s (208 MPH) Low: 57 m/s (128 MPH)
No Load Speed (RPM)	High: 17,000 Low: 10,000
Sound Pressure Level	82.3 dB(A)
Sound Power Level	94.7 dB(A)
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	905x141x194 mm (35-5/8"x5-5/8"x7-5/8")
Net weight	3.1 - 3.2 kg (6.8 - 7.1 lbs.)

DUB362Z

Cordless Blower




18V X2 (36V) LXT BL Brushless Cordless Variable 6-Speed Blower

- Our most powerful cordless blower yet: Amazing 54 m/s and 13.4 m³/min operation
- Delivers up to 28 minutes of run time at 15,800 RPM using two 18V LXT 5.0Ah batteries
- 6-Stage air velocity/volume selection dial with variable speed control trigger
- 3-Stage telescopic long nozzle with adjustment range of 100 mm for user convenience
- Compact and lightweight for single handed operation



Max Air Volume	13.4 m ³ /min (473 CFM)
Max Air Velocity	54 m/s (120 MPH)
No Load Speed (RPM)	11,400 - 21,500
Sound Pressure Level	79.1 dB(A)
Sound Power Level	93.5 dB(A)
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	830/880/930x205x295 mm (32-3/4"/34-3/4"/36-5/8"x8-1/8"x11-5/8")
Net weight	3.5 - 4.2 kg (7.7 - 9.3 lbs.)



* Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.
* There is limited stock on some of the models. Please confirm availability.

DUC122Z

Cordless Chain Saw



18V LXT Li-Ion Cordless 115 mm (4-1/2") Chain Saw

- The perfect chain saw for trimming, powered by 18V LXT
- Makita-built motor delivers 5.0 m/s (300 m/min) (980 FPM) for increased cutting speed
- 115 mm (4-1/2") guide bar is ideal for climbing
- "Tool-less" chain adjustments for convenient operation and maintenance
- Low noise level and zero emissions for operator comfort



Guide Bar Length	115 mm (4-1/2")
Chain Pitch	1/4"
Chain Gauge	1.3 mm (0.05")
Chain Speed	5.0 m/s (300 m/min) (980 FPM)
Chain Oil Tank Volume	80 mL (2.7 US oz)
Sound Pressure Level	84.6 dB(A)
Sound Power Level	92.7 dB(A)
Vibration Level	Cutting Wood: 4.3 m/s ²
Dimensions (L x W x H)	422x195x215 mm (16-5/8"x7-5/8"x8-1/2")
Net weight	2.6 kg (5.7 lbs.)

DUC254Z

Cordless Chain Saw



Efficiency equivalent to 23mL class engine chain saw.



Guide Bar Length	250 mm
Chain Pitch / Chain Gauge	3/8" / 1.1 mm 3/8" / 1.3 mm
Chain Speed	0 - 24 m/s (0 - 1,440 m/min)
Chain Oil Tank Volume	140 mL
Sound Pressure Level	92.2 dB(A)
Sound Power Level	103.2 dB(A)
Vibration Level	Cutting Wood: 3.1 m/s ²
w/o Guide Bar :	w/o Guide Bar :
	258x184x191 mm
Dimensions (L x W x H)	w/ 25 cm (10") 90PX Sprocket Nose Bar: 482x184x191 mm
Net Weight	2.8 - 3.2 kg


DUC256Z

Cordless Chain Saw



18V X2 (36V) LXT Li-Ion Cordless Chain Saw 250mm, Variable Speed, Brake, Soft Start

- Powered by two 18V LXT Li-Ion batteries
- Outer Rotor BL Motor provides high operating efficiency
- Chain brake and variable speed trigger switch produce high operability equivalent to 30mL class engine chain saw



Guide Bar Length	250 mm (10")
Chain Pitch	9.5mm (3/8")
Chain Gauge	1.3 mm
Chain Speed	0-20 m/s / 0-1,200m/min
Chain Oil Tank Volume	200mL (6.8 US oz)
Sound Pressure Level	103dB(A)
Vibration Level	Cutting Wood 3.2m/s ²
Dimensions(L x W x H)	270x205x232mm
Net weight	4.6-5.1kg

DUC302Z

Cordless Chain Saw



18V X2 (36V) LXT Li-Ion 300mm Cordless Chain Saw

- Powered by two 18V LXT Li-Ion batteries
- Two 18V LXT Li-Ion batteries deliver power and performance without leaving the 18V LXT platform
- Low noise level and zero emissions for operator comfort
- "Tool-less" chain adjustment for convenient operation and maintenance
- Kickback brake & electric brake for maximum productivity and maximum operator safety



Guide Bar Length	300 mm (12")
Chain Pitch	3/8"
Chain Gauge	1.1 mm (0.043")
Chain Speed	8.3 m/s (500 m/min)
	(1,650 FPM)
Chain Oil Tank Volume	85 mL (2.9 US oz)
Sound Pressure Level	84.4 dB(A)
Sound Power Level	95.4 dB(A)
Vibration Level	Cutting Wood: 6.3 m/s ²
Dimensions	600x234x198 mm
(L x W x H)	(23-5/8"x9-1/4"x7-3/4")
Net weight	4.7 kg (10.3 lbs.)

DUC400Z

Cordless Chain Saw



18V X2 (36V) LXT BL 400mm Brushless Cordless Chain Saw

- Powered by two 18V LXT Li-Ion batteries
- Two 18V LXT Li-Ion batteries deliver power and performance without leaving the 18V LXT platform
- Low noise level and zero emissions for operator comfort



Guide Bar Length	400 mm (16")
Chain Pitch	370 mm (14-1/2")
Chain Gauge	3/8"
Chain Speed	1.1 / 1.3 mm (0.043" / 0.050")
	0 - 20 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Chain Oil Tank Volume	200 mL
Sound Pressure Level	87.7 dB(A)
Sound Power Level	100.4 dB(A)
Vibration Level	Cutting Wood: 5.3 m/s ²
Dimensions (L x W x H)	800x215x235 mm with guide bar
	(31-1/2"x8-5/16"x9-1/4") with guide bar
Net weight	4.6 - 5.5 kg (10.5 - 12.1 lbs.)

EA3502S

Petrol Chain Saw



35cc, 400mm, Automatic Oiling, Chain Brake, Anti Vibration, Primer Pump, Capacitor Discharge Ignition

Premium hobby class chain saw for tough semi-professional use.



Saw chain	Pitch : 3/8"
	Gauge: 1.1 mm (0.043") / 1.3 mm (0.050")
Displacement	35 mL
Engine power	1.7 kW / 2.4 PS
Fuel Tank Capacity	0.4 L
Chain Oil Tank Volume	0.29 L
Sound Pressure Level	100 dB(A)
Sound Power Level	110 dB(A)
Vibration Level Front Grip	4.9 m/s ²
Vibration Level Rear Grip	5 m/s ²
Dimensions (L x W x H)	415x247x273 mm
Power head weight	4.4 kg (8.8 lbs.)

DUA301Z

18V X 2 (36V) LXT BL AFT Cordless Telescopic Pole Saw

Cordless Telescopic Pole Saw



- High power BL motor delivers the same or higher operation efficiency than 30 mL class engine models
- Torque boost mode raises the current limit temporarily for easy cutting of trunks or thick limbs
- Lightweight pole saw head for easy access to a desired cutting position and reduced operator fatigue
- Ideal for pruning and limbing in tall trees or hard-to-reach areas



BL MOTOR XPT LXT AFT



Guide Bar Length	300 mm (12")
Recommended Guide Bar Length	250 - 300 mm (10- 12")
Max Cutting Length	300 mm (12")
Saw Chain	Gauge: 1.1/1/3 mm (0.043 / 0.050") Pitch: 3/8"
Chain Speed	0 - 20.0 m/s (0 = 1,200 m/min) (0 - 3,940 FPM)
Oil Tank Capacity	160mL
Dimensions (L x W x H)	w/o Guide Bar: 2,530 - 3,762 x 155 x 191 mm (99-1/2 - 148 x 6-1/8 x 7-1/2")
Net weight	7.8 - 8.5 kg (17.2 - 18.7 lbs)

DJR183Z

18V LXT Li-Ion Cordless Compact Recipro Saw

Cordless Recipro Saw



- Variable speed (0 - 3,000 SPM) combined with a 13 mm (1/2") stroke length for faster and more efficient cutting
- Dual-position on/o switch allows for either paddle or trigger switch operation
- Toolless blade change system allows for faster blade installation and removal
- Compact design at 392 mm (15-1/2") long; lightweight for convenient operation
- Built-in LED light illuminates the work area



Capacity	Pipe : 50 mm (2") Wood: 50 mm (2")
Length of Stroke	13 mm (1/2")
Vibration Level	Cutting Boards: 8.0 m/s ² Cutting Wooden Beams: 7.0 m/s ²
Strokes Per Minute (SPM)	0-3,000
Sound Pressure Level	77 dB(A)
Dimensions (L x W x H)	392x81x209 mm (15-1/2"x3-3/16"x8-1/4")
Net weight	1.5 - 1.7 kg (3.3 - 3.8 lbs.)

DUP362Z

18V X2 (36V) LXT Li-Ion Battery Powered Pruning Shears

Battery Powered Pruning Shears



- High cutting performance.
- Smooth cutting similar to that of a hand pruner



Capacity	Pipe : 50 mm (2")
Max Cutting	33 mm (1-5/16")
Cutting Torque	250N
Dimensions (L x W x H)	305x43x106 mm
Net weight	0.77 - 0.82 kg


DDG460ZX1

18V X2 (36V) LXT Brushless Cordless Earth Auger

Cordless Earth Auger



- Earth auger attachment includes a bar which receives reaction force and an auxiliary handle, and helps the user drill holes in the ground easier
- Reversing switch enables to extract, in reverse rotation mode, an auger bit jammed in soil with high resistance like clay soil
- Lightweight design for reduced operator fatigue
- Auger bit adapter enables to use the auger bits for popular engine earth augers
- BL motor delivers 1,400 RPM



Capacity	Sandy Soil: 200 mm Clay Soil: 150 mm
No Load Speed (RPM)	High / Low: 0 - 1,400 / 0 - 350
Max Fastening Torque	High: 48 N-m (430 in.lbs.) Low: 136 N-m (1,210 in.lbs.)
Vibration Level	2.5 m/s ² or less
Sound Pressure Level	85 dB(A)
Sound Power Level	96 dB(A)
Dimensions (L x W x H)	840 x 607 x 223 mm (33 x 23-7/8 x 8-3/4")
Net weight	7.3 - 8.2 kg (16.1 - 18.1 lbs.)

Chuck Key, Hex Wrench, Adapter.

DUS158Z

18V LXT Li-Ion Cordless 15L Garden Sprayer

Cordless Garden Sprayer



- Battery powered garden sprayer with 18V voltage.
- Easy to set up and light to carry.
- Very quiet running sound.
- Large spray volume on a single full battery charge.



Max Pressure	0.5 MPa
Capacity	15 L
Hose Length	1.7m
Dimensions (L x W x H)	325 x 237 x 517 mm
Net weight	5.9 - 6.2 kg (13.0-13.7 lbs.)

Live Green & Grow Strong

* Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

* There is limited stock on some of the models. Please confirm availability.


DUR193Z

Cordless Grass Trimmer



18V LXT Li-Ion Cordless Grass Trimmer, Loop Handle

- A compact and handy line trimmer for trimming and finishing of gardens and other green spaces.
- This tool, with a cutting width of 260 mm, has a balanced shaft design for added user convenience.
- Equipped with an adjustable telescopic shaft.



Cutting Width	Nylon Cutting Head: 260mm (10-1/4")
No Load Speed (RPM)	7,800
Sound Pressure Level	73,2 dB(A)
Sound Power Level	83,1 dB(A)
Vibration Level	Left/Right: 2.5/ 2.5 m/s ² or less
Dimensions (L x W x H)	1248 - 1436 x 265 mm
Maximum Run Time(min)	w/BL1830B:45
Net Weight	2.3-2.6 kg (5.1-5.7 lbs.)

DUR190LZX3

Cordless Grass Trimmer



18V LXT Li-Ion Cordless 3-Speed Grass Trimmer, Loop Handle

- Better maneuverability due to lightweight design and the same powerful cutting performance as the current DUR187U series
- One protector for metal blade / plastic blade / trimmer head
- Toolless shaft lock for plastic blade change
- The guard integrated with receive washer minimizes weed winding
- Soft grip of ergonomic design



Cutting Width	Nylon Cutting Head: 300 mm (11-3/4") Metal Blade: 230 mm (9") Plastic Blade: 255 mm (10")
No Load Speed (RPM)	3,500 - 6,000
Spindle Size	M10 x 1.25 LH
Dimensions (L x W x H)	1,836 x 348 x 236 mm (72-1/4 x 13-3/4 x 9-1/4")
Net weight	2.9 - 3.2 kg (6.4 - 7.1 lbs.)

DUR192L

Cordless Grass Trimmer



18V LXT BL Brushless Cordless 2-Speed Grass Trimmer, Loop Handle

- 2-Speed options (Low: 4,500 RPM, High: 6,000 RPM) allows the operator to match speed to application
- Direct-drive motor mounted directly on the trimmer head for increased efficiency and improved tool balance



Cutting Width	Trimmer Head: 300 mm
No Load Speed (RPM)	High / Low: 6,000 / 4,500
Spindle Size	M10 x 1.25 LH
Sound Pressure Level	74.8 dB(A)
Sound Power Level	87.8 dB(A)
Vibration Level	2.5 m/s ²
Overall Length	1,670mm
Net weight	3 kg with battery

*Standard with nylon cutting head

DUR368AZ

Cordless Grass Trimmer



18V X2 (36V) LXT BL Brushless Cordless 3-Speed Grass Trimmer, Bike Handle

- Automatic torque Drive Technology (ADT) adjusts speed and torque during operation for optimum performance
- Active Feedback sensing Technology (AFT) turns the motor off if blade rotation is suddenly forced to stop
- Makita-built Outer Rotor BL Brushless Motor direct-drive system provides high power and increased torque
- Constant speed control minimizes reduction in rotation speed under load



Cutting Width	Metal Blade: 230 mm (9") TCT Saw Blade: 255 mm (10") Nylon Cutting Head: 350 mm (13-3/4") Plastic Blade: 255 mm (10")
No Load Speed (RPM)	High / Mid / Low: 6,500 / 5,300 / 3,500
Spindle Size	M10 x 1.25 LH
Sound Pressure Level	4-Tooth Blade: 74.7 dB(A)
Sound Power Level	4-Tooth Blade: 89.2 dB(A)
Sound Pressure Level	Nylon Cutting Head: 76.4 dB(A)
Sound Power Level	Nylon Cutting Head: 89 dB(A)
Vibration Level	Left / Right: 2.5 / 2.5 m/s ² or less
Dimensions (L x W x H)	1,758 x 615 x 442 mm (69-1/4 x 24-1/4 x 17-3/8)
Net weight	4.1 - 4.75 kg (9.0 - 10.5 lbs.)

*Standard with nylon cutting head.

DUR368LZ

Cordless Grass Trimmer



18V X2 (36V) LXT BL ADT AFT Cordless 3-Speed Grass Trimmer, Loop Handle

- Automatic torque Drive Technology (ADT) adjusts speed and torque during operation for optimum performance
- Active Feedback sensing Technology (AFT) turns the motor off if blade rotation is suddenly forced to stop
- Makita-built Outer Rotor BL Brushless Motor direct-drive system provides high power and increased torque
- Constant speed control minimizes reduction in rotation speed under load



Cutting Width	Metal Blade: 230 mm (9") TCT Saw Blade: 255 mm (10") Nylon Cutting Head: 350 mm (13-3/4") Plastic Blade: 255 mm (10")
No Load Speed (RPM)	High / Mid / Low: 6,500 / 5,300 / 3,500
Spindle Size	M10 x 1.25 LH
Sound Pressure Level	4-Tooth Blade: 74.7 dB(A)
Sound Power Level	4-Tooth Blade: 89.2 dB(A)
Sound Pressure Level	Nylon Cutting Head: 76.4 dB(A)
Sound Power Level	Nylon Cutting Head: 89 dB(A)
Vibration Level	Left / Right: 2.5 / 2.5 m/s ² or less
Dimensions (L x W x H)	1,758 x 362 x 231 mm (69-1/4 x 14-1/4 x 9-1/8")
Net weight	3.9 - 4.5 kg (8.6 - 10.0 lbs.)

*Standard with nylon cutting head.

DLM382DZ

Cordless Lawn Mower



18V X2 (36V) LXT Li-Ion Cordless 38 cm (15") 2-in-1 Mower

- Mulching (with optional accessory)
- Two 18V LXT Li-Ion batteries deliver the power and run time for corded demands without leaving the 18V LXT platform
- Grass box with grass level indicator
- XPT (eXtreme Protection Technology) dust and drip-proof performance is enhanced for use in bad weather

Cutting Width	380 mm (15")
Cutting Height	20 - 75 mm (13/16" - 2-15/16")
No Load Speed (RPM)	3,700
Dimensions (L x W x H)	DLM382: 1,380-1,410x450x985-1,005 mm
Net weight	16.2 - 16.9 kg (35.7 - 37.3 lbs.)



LXT XPT



DLM432Z

Cordless Lawn Mower



18V X2 (36V) LXT Li-Ion Cordless 38 cm (15") / 43 cm (17") 2-in-1 Mower

- Mulching (with optional accessory)
- Two 18V LXT Li-Ion batteries deliver the power and run time for corded demands without leaving the 18V LXT platform
- Grass box with grass level indicator
- XPT (eXtreme Protection Technology) dust and drip-proof performance is enhanced for use in bad weather

Cutting Width	430 mm (17")
Cutting Height	20 - 75 mm (13/16" - 2-15/16")
No Load Speed (RPM)	3,600
Dimensions (L x W x H)	1,435-1,490x460x1,005-1,045 mm (56-1/2"-58-3/4"x 18-1/8"x39-1/2"-41-1/4")
Net weight	16.8 - 17.5 kg (36.6 - 38.6 lbs.)



LXT XPT



DLM461Z

Cordless Lawn Mower



18V X2 (36V) LXT BL Brushless Cordless 46 cm (18") 3-in-1 Mower

- 800 m² Large mowing area
- Soft no load automatically reduces the motor speed according to load condition for low noise
- Low noise mode provides rotation speed (2,500 RPM) by constant speed control
- Wide 46 cm (18") robust steel cutting deck for increased durability
- IPX4 water resistant for use in bad weather

Blade Type	2 Tooth
Hole Diameter	10.0 mm (3/8")
Cutting Width	460 mm (18")
Cutting Height	20 - 75 mm (13/16" - 2-5/16")
No Load Speed (RPM)	2,500 - 3,300
Recommended mowing area	w/ BL1860B x2: 800 - 1,600 m ² w/ BL1850B x2: 680 - 1,360 m ² w/ BL1830B x2: 380 - 760 m ² w/ BL1860B / BL1850B / BL1840B / BL1830B
Continuous Use (min.)	BL1815N: 21 / 18 / 14 / 10 / 6
Sound Pressure Level	79 dB(A)
Sound Power Level	91 dB(A)
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	During operation: 1,319-1,518x532x879-1,138 mm
Net weight	25.3 - 27.6 kg (55.8 - 60.8 lbs.)



BL MOTOR NOLOAD



DUH523Z

Cordless Hedge Trimmer



18V LXT Li-Ion Cordless Hedge Trimmer

- Delivers 2,700 SPM for increased cutting speed
- 52 cm (20-1/2") blade provides increased cutting capacity
- Improved soft grip design for maximum user comfort
- Anti-vibration structure is engineered with five cushions within the motor housing to help minimize vibration
- Lower noise level at only 77 dB(A) for improved user comfort

Blade Length	520 mm (20-1/2")
Strokes Per Minute (SPM)	2,700
Tooth Spacing	26 mm (1")
Sound Pressure Level	77 dB(A)
Sound Power Level	84.3 dB(A)
Vibration Level	2.5 m/s ²
Dimensions (L x W x H)	938x195x193 mm (37"x7-5/8"x7-5/8")
Net weight	3.0 - 3.4 kg



*Standard with Blade Part No. 197761-2

DUH602Z

Cordless Hedge Trimmer



18V LXT BL Brushless Cordless Hedge Trimmer, Variable Speed, Brake, Reversing, 3-Speed, Constant Speed, Soft Start

Blade Length	600 mm (23-5/8")
Max Cutting Capacity	21.5mm
Strokes Per Minute (SPM)	High / Med / Low: 0 - 4,400 / 0 - 3,600 / 0 - 2,000
Max Output	520 W
Dimensions (L x W x H)	1,121x192x225 mm
Net weight	3.8-4.5kg



BL MOTOR XPT



DUH651Z

Cordless Hedge Trimmer



18V X2 (36V) LXT Li-Ion Cordless Hedge Trimmer

- 18V solution for corded power demands
- Two 18V LXT Li-Ion batteries deliver the power and performance for corded demands without leaving the 18V LXT platform
- Makita-built motor delivers 3,600 SPM for faster cutting
- 6 speed dial (2,000 - 3,600 SPM) allows the user to match the speed to the application

Blade Length	650 mm (25-1/2")
Strokes Per Minute (SPM)	2,000 - 3,600
Tooth Spacing	36 mm (1-7/16")
Sound Pressure Level	82 dB(A)
Sound Power Level	91.1 dB(A)
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	1,135x225x200 mm (44-3/4"x8-7/8"x7-7/8")
Net weight	4.7 - 5.5 kg



XPT



* Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

* There is limited stock on some of the models. Please confirm availability.

UH6570

Hedge Trimmer



220V Hedge Trimmer, Brake

More improved handling with ergonomic multi-grip system.



Continuous rating input	550W
Blade Length	650 mm (25-1/2")
Strokes Per Minute (SPM)	3,200
Tooth Spacing	18 mm (11/16")
Sound Pressure Level	89.9 dB(A)
Sound Power Level	97.9 dB(A)
Vibration Level	6.7 m/s ²
Dimensions (L x W x H)	1,042x223x206 mm
Net weight	3.8 - 3.9 kg (8.4 - 8.5 lbs.)
Power supply cord	0.3 m (0.98 ft)

DUN461WZ

Cordless Pole Hedge Trimmer



18V LXT Cordless 46 cm (18-1/8") Pole Hedge Trimmer

- Telescopic pipe for no need of stepladders
- 3,600 SPM for faster cutting
- New chip receiver can be mounted
- Angle adjustable hedge trimmer head; 60° tilt-up to 75° tilt-down from the horizontal position; Can be folded in the 180° position for easy transport and storage; Built-in clutch works to stop the blade motion even if the throttle lever is touched during folding operation; 10 angle settings; The angle of hedge trimmer head can be changed simply by pushing a button



Blade Length	460 mm (18-1/8")
Max Cutting Capacity	18 mm (11/16")
Strokes Per Minute (SPM)	3,600
Cycles Per Minute (CPM)	1,800
Continuous Use (min.)	w/ BL1830B: 60
Dimensions (L x W x H)	1,889 - 2,511 x 87 x 133 mm (74-1/2 - 99 x 3-7/16 x 5-1/4")
Net weight	3.4 kg (7.5 lbs.)

DUN500W

Cordless Pole Hedge Trimmer



18V LXT BL Brushless Cordless 50 cm (19-3/4") Pole Hedge Trimmer

- Lightweight for reduced operator fatigue
- Optimum curved blade for smooth cutting; New triple-edged cutting teeth are designed to easily catch and firmly hold twigs, also featuring excellent sharpness; Curved blades reduce friction resistance to suppress energy loss (DUN500W)
- BL motor delivers 4,400 SPM for faster cutting
- BL motor with high power to weight and size ratio
- BL motor eliminates carbon brushes, enabling the BL motor to run cooler and more efficiently for longer life



Blade Length	500 mm (19-3/4")
Max Cutting Capacity	23.5 mm (15/16")
Strokes Per Minute (SPM)	High / Mid / Low: 4,400 / 3,600 / 2,000
Cycles Per Minute (CPM)	High / Mid / Low: 2,200 / 1,800 / 1,000
Continuous Use (min.)	w/ BL1860B High / Mid / Low: 60 / 90 / 190
Dimensions (L x W x H)	2,115 x 97 x 137 mm (83-1/4 x 3-13/16 x 5-3/8")
Net weight	3.9 - 4.3 kg (8.6 - 9.5 lbs.)

PDC01

Portable Power Pack



18V / 18V X2 (36V) LXT Li-Ion Portable Power Pack

- "Simple" Portable Power Supply Unit powered by multiple LXT batteries
- Powered by up to four 18V LXT batteries
- The user of 18V LXT batteries can get longer run time at less cost
- Compatible with 18V LXT / 18V x2 LXT 36V direct power connection
- Also can be used as a stationary power pack by detaching the backpack harness



Capacity	24 / 12 Ah
Energy Capacity	432 Wh
Dimensions (L x W x H)	400 x 195 x 132 mm (15-3/4 x 7-5/8 x 5-3/16")
Net weight	2.8 kg (6.1 lbs.) (without battery)

PDC1200A01

Portable Power Pack



18V X 2 (36V) LXT Li-Ion Portable Power Pack

- 1,200 Wh high capacity
- Enables a DUB362 to operate over 1 hour at the highest speed (at dial 6)
- Equipped with built-in battery cells
- Compatible with 18Vx2 LXT, 36V direct power connection

Harness, Adapter for 36V (18V x2)



Capacity	33.5 Ah
Energy Capacity	1,206 Wh
Number of Cells	100
Charging Time (hours)	6
Dimensions (L x W x H)	w/o Harness: 369 x 261 x 139 mm (14-1/2 x 10-1/4 x 5-1/2") w/ Harness: 428 x 261 x 164 mm (16-7/8 x 10-1/4 x 6-1/2")
Net weight	w/o Harness: 8.8 kg (19.4 lbs.) w/ Harness: 10.4 kg (22.9 lbs.)



CORDLESS INNOVATION OUTDOOR POWER EQUIPMENT

Live Green & Grow Strong

Batteries, Chargers and
Optional items sold separately

CHAIN SAW
DUC122Z

RECIPRO
SAW
DJR183Z

CHAIN SAW
DUC254Z

GARDEN
SPRAYER
DUS158Z

BLOWER
DUB185Z

BLOWER
DUB186Z

BLOWER
DUB184Z

HEDGE
TRIMMER
DUH602Z

GRASS
TRIMMER
DUR190LZX3

STRING
TRIMMER
DUR193Z

GRASS
TRIMMER
DUR192L

HEDGE
TRIMMER
DUH523Z

TELESCOPIC
POLE HEDGE
TRIMMER
DUN461W

TELESCOPIC
POLE HEDGE
TRIMMER
DUN500W

HEDGE
TRIMMER
DUH651Z

GRASS
TRIMMER
DUR368LZ

TELESCOPIC
POLE SAW
DUA301Z

BLOWER
DUB362Z

BLOWER
DUB361Z

GRASS
TRIMMER
DUR368AZ

PORTABLE
PACK
PDC1200A01
Supplied with
18Vx2 (36V)
Adaptor



191A626 supplied with
18Vx2 (36V) Adaptor

191A676 - supplied
with both 18Vx2
(36V) and 18V Adaptor

PORTABLE
PACK
PDC01



PRUNING
SHEAR
DUP362Z

LAWN
MOWER
DLM461Z

LAWN
MOWER
DLM382DZ

LAWN
MOWER
DLM432Z

CHAIN
SAW
DUC302Z

CHAIN
SAW
DUC256Z

CHAIN
SAW
DUC400Z

EARTH
AUGER
DDG460ZX1



EXPAND YOUR LITHIUM-ION LINE-UP



1.5Ah BATTERY
BL1815N
Charge time:
15 min!



3.0Ah BATTERY
BL1830B
Charge time:
22 min!



5.0Ah BATTERY
BL1850B
Charge time:
45 min!



6.0Ah BATTERY
BL1860B
Charge time:
55 min!

18V Intelligent
Charger and Batteries
fit all 18V Tools

Excludes HP347 & HP457
white/black battery models
* Charge time from cold -
Charges all batteries



FAST CHARGER
DC18RC



AUTOMOTIVE CHARGER
DC18SE



TWO PORT MULTI
FAST CHARGER
DC18RC

- EASE of use
- ZERO Emissions
- LOW Noise

18V Cordless Tools provide a
cleaner, greener alternative to
the traditional petrol options.



INDUSTRIAL POWER TOOL CATALOGUE

ADT Automatic Torque Drive Technology

AFT Active Feedback Sensing Technology

- Anti Vibration
- Auto Firing Stop
- Automatic Oiling
- Brake
- Bevel Cutting
- Bevel Cutting L45 R5
- Bevel Cutting 45 R
- Built-in Light
- Capacitor Discharge Ignition
- Carrying Case
- Chain Brake

AVT Anti Vibration Technology

SJS Super Joint System

- Constant Speed
- Depth Adjusting
- Double Insulation
- Dust Collecting
- Electronic 2-Speed
- Electronic 3-Speed
- Electronic 4-Speed
- Hex Shank

DXT Deep and Exact Cutting Technology

SJS II Super Joint System II

- Hook & Loop
- Jig Saw blade - Bayonet Shank
- Keyless Chuck
- Laser Marker
- Mechanical 2-Speed
- Orbital Cutting
- Prime Pump
- Rapid Start

XPT Extreme Protection Technology

WG Wet Guard

- Reversing
- Revolving Hose
- SDS-plus
- SDS-max
- Single / Sequential Firing
- Soft Start
- Static Free Hose
- Torque Limiter
- Torque Setting 16
- Torque Setting 18
- Torque Setting 20
- Torque Setting 21
- Variable Speed



a member of the **Hudaco** group

FOR WHOLESALE TRADE ENQUIRIES ONLY

CAPE TOWN **DURBAN** **JOHANNESBURG**
 TEL: (021) 932-0568 TEL: (031) 717-6400 TEL: (011) 878-2600
 FAX: (021) 932-2762 FAX: (031) 709-1928 FAX: (011) 873-5010

www.makita.co.za

Like us on Facebook
<http://facebook.com/MakitaPowerToolsSA>

GUARANTEE: These machines have been thoroughly inspected and tested before leaving the factory and are guaranteed against defective workmanship and materials. Should any problems develop the complete machine must be returned to an Authorised Makita Service Centre. This guarantee does not apply where repairs have been made or attempted to be made to the machine by unauthorised persons and/or as a result of normal wear and tear, and/or of the machine has been abused or used for any purpose other than its intended specified use having regard to the capacity thereof. Nothing contained in this guarantee shall deprive the manufacturer and/or supplier on the one hand, and the consumer or customer on the other hand, of any rights or obligations they may have under and in terms of the Consumer Protection Act 68 of 2008 and any Regulations and amendments pertaining thereto from time to time ("the Act"), insofar as the Act may be applicable to the manufacture, sale and/or supply and purchase of the machine.

Please note: Manufacturer reserves the right to change specifications of parts and accessories without notice. Standard equipment and specifications of parts may vary in accordance with specifications issued in various countries.

This catalogue replaces the Makita Power Tool Catalogue dated June 2021 edition and all previous Makita Tool Catalogues. Rutherford is not responsible for printing errors (E&OE).